

## CHAPTER 5

### RESULTS & DISCUSSION

#### 5.1 Results

##### 5.1.1 First case: Dehydration of natural gas by zeolite molecular sieves

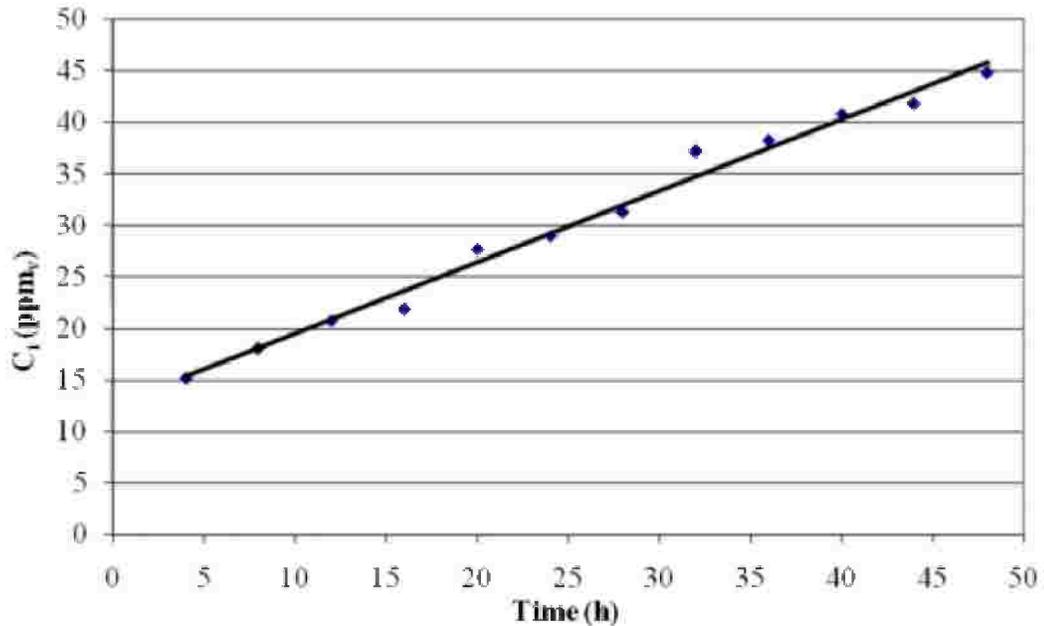


Figure 5.1 Variations of measured inlet concentrations of water vapor in natural gas with time (batch 1: Adsorption step)



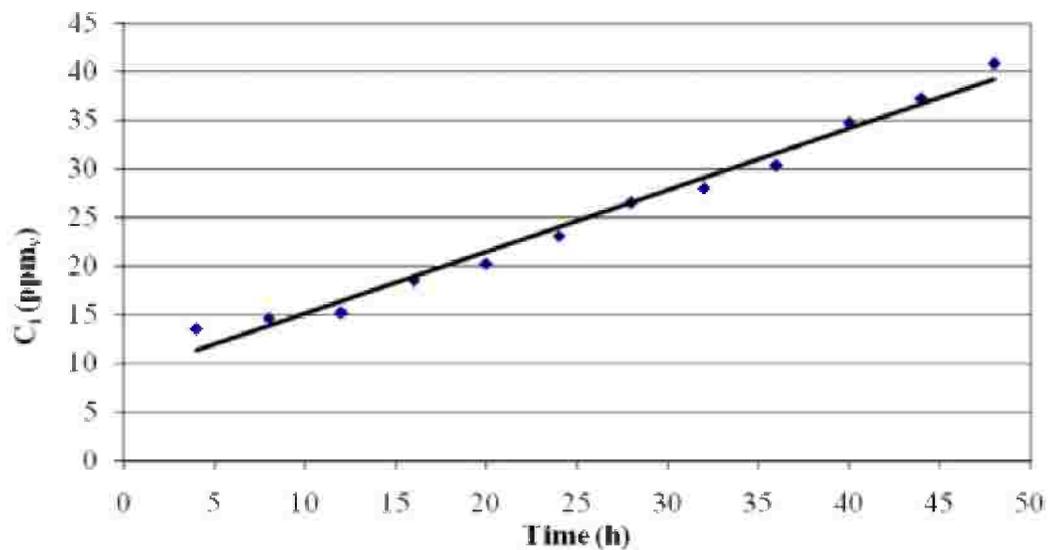


Figure 5.2. Variations of measured inlet content

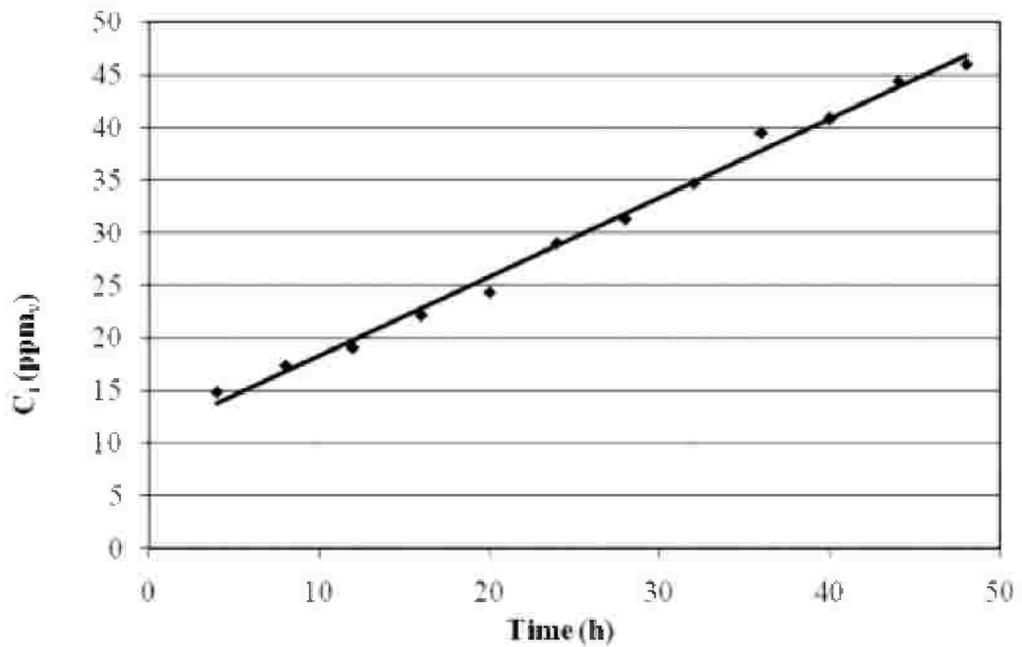


**Figure 5.3 Variations of measured inlet concentrations of water vapor in natural gas with time (batch 3: Adsorption step)**


- Figures 5.1, 5.2 and 5.3 show the variation of inlet concentration of water vapor in natural gas in three different batches with time, [Tables (11,12 &13) in appendix (A)]

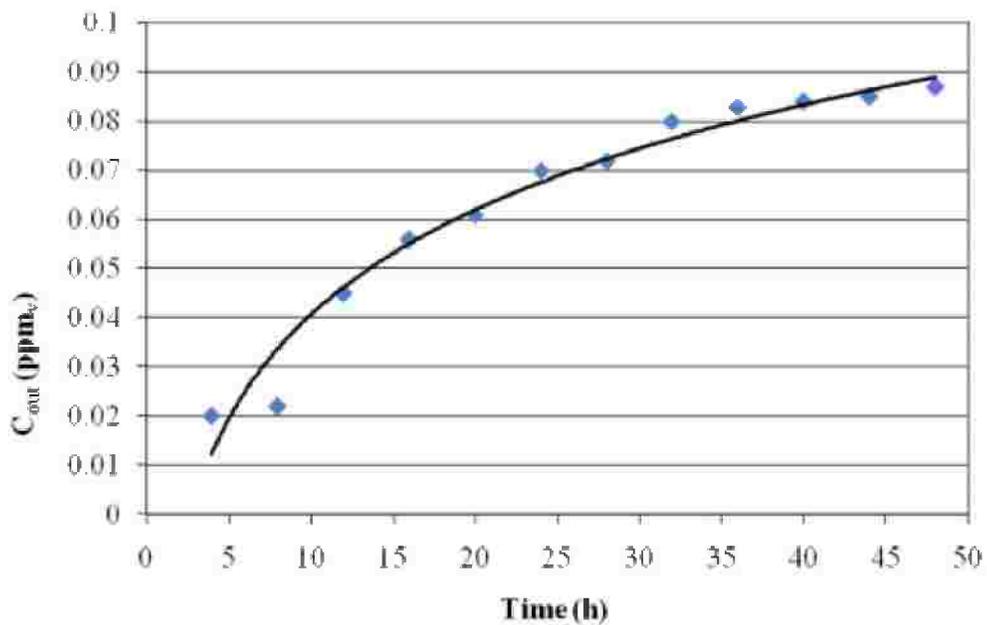

**Figure 5.4 Variations of measured outlet concentrations of water vapor in natural gas with time (batch 1: Adsorption step)**

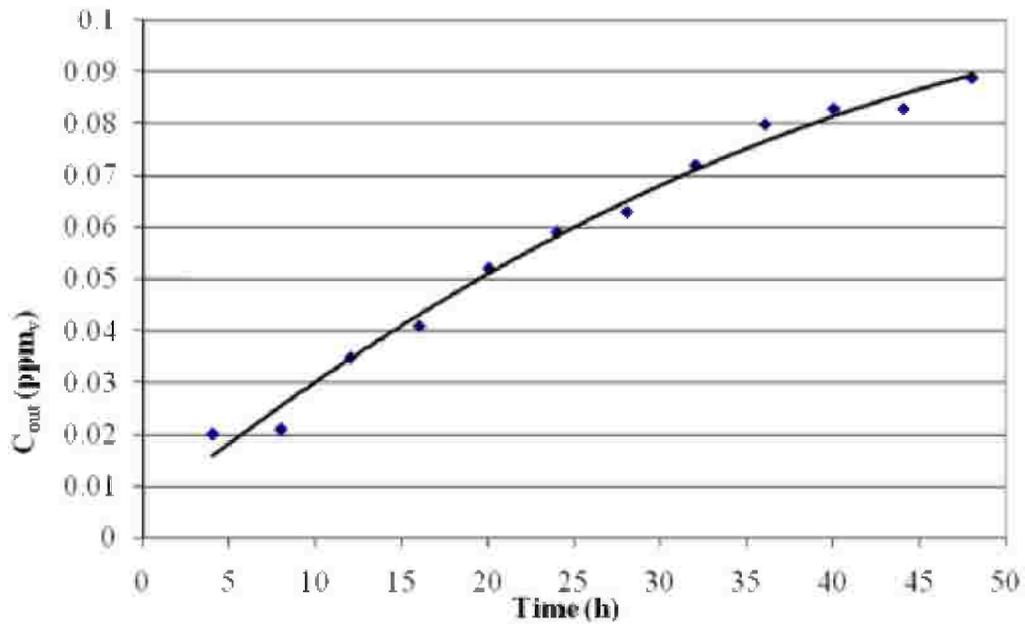

**Figure 5.5 Variations of measured outlet concentrations of water vapor in natural gas with time (batch 2: Adsorption step)**

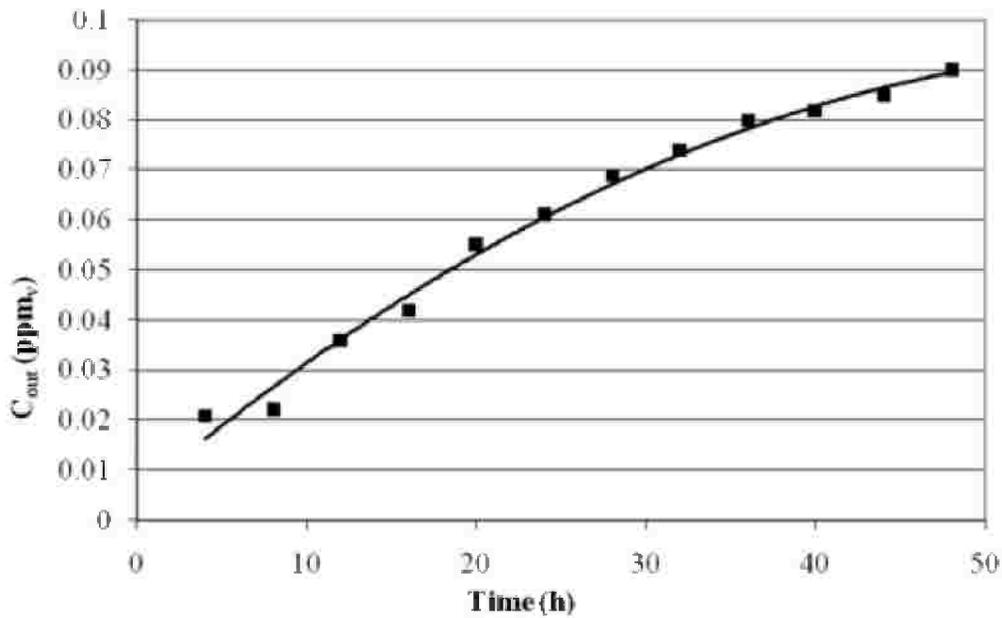

**Figure 5.6 Variations of measured outlet concentrations of water vapor in natural gas with time (batch 3: Adsorption step)**

- Figures 5.4, 5.5 and 5.6 show the variation of outlet concentration of water vapor in natural gas in three different batches with time, [tables (11, 12&13) in appendix (A)]. These figures show that by increasing the time the outlet concentration is increased,


but the dehydration beds have not reached breakthrough zone and that is because the regeneration cycle was started after 48 hours of adsorption step according to the design criteria of unit.

- ❖ In all the foregoing Figures 5.1 through 5.5, one can observe the following:
  1. The variation of inlet concentration with time in all batches is considerable (from 15 ppm<sub>v</sub> to 45 ppm<sub>v</sub>), whereas the outlet concentration variation was always limited (0.02 ppm<sub>v</sub> to 0.086 ppm<sub>v</sub>). This indicates the high efficiency of the molecular sieve bed for dehydration.
  2. This can be due to the inlet concentration never exceeded 45 ppm<sub>v</sub> (water vapor) while the design value was 90 ppm<sub>v</sub>. This big margin led to such a low outlet concentration for the whole period of bed operation (about 15 years) of 12 cycles of adsorption per month followed by regeneration.
  3. In addition to that the regeneration step was executed early and before breakthrough time as design criteria implies and to put gas plant operation in safety mode.

- **Validation of the mathematical model**

**Table 5.1: Comparison between Estimated and Plant data**

<b>Time (h)</b>	<b>Plant data C<sub>out</sub> (ppm<sub>v</sub>)</b>	<b>Estimated C<sub>out</sub> (ppm<sub>v</sub>)</b>	<b>% Absolute Deviation</b>
4	0.02	0.0203	1.5
8	0.036	0.034	5.55
12	0.051	0.048	5.89
16	0.056	0.059	5.36
20	0.064	0.068	6.25
24	0.072	0.075	4.17
28	0.079	0.08	1.27
32	0.08	0.082	2.5
36	0.083	0.084	1.2
40	0.084	0.085	1.19
44	0.085	0.086	1.17
48	0.087	0.087	0.0

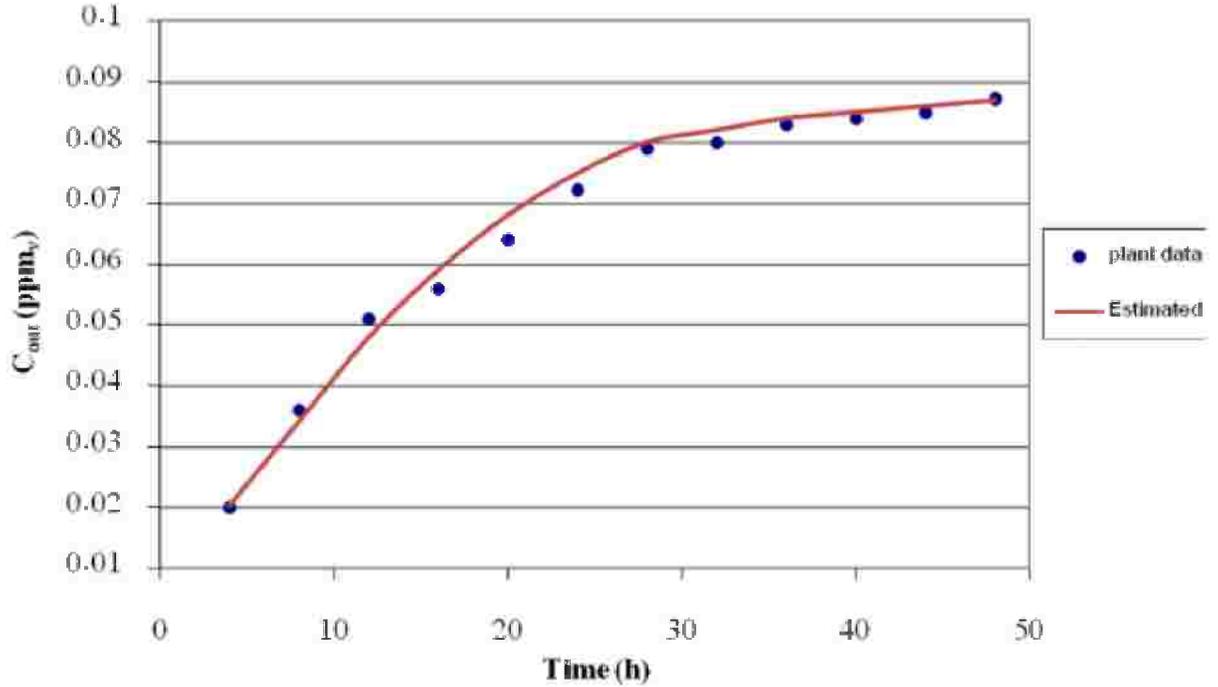


**Figure 5.7 Comparison between estimated and plant data of the outlet concentration.**

- Table (5.1) and figure 5.7 show the validation of the proposed model. Many trials to improve the accuracy of the data obtained as a final result by assuming different values for  $D_p^e$  and resolve the model to obtain a minimum value of standard error (SE). It is clear that by using value of  $D_p^e = 1.2 \times 10^{-12} \text{ m}^2/\text{s}$  the developed model is very successful (SE= 3.07%) and gave results very close to actual plant data. (the range of  $D_p^e$  was  $1 \times 10^{-8} - 1 \times 10^{-10} \text{ m}^2/\text{s}$  [24])
- Fatemi, Shohreh, [19] compared the experimental results with the numerical results with standard error (SE) fluctuating between 6.6% and 7.4%. But it should be noted that the experimental data collected were for laboratory field with total sum time about 200 minutes only.
- Xi-Gang Yuan [25] developed a model which gave standard error (SE) fluctuating between 5.7% and 8.6%. Also it was applied in the laboratory field.
- Maria J. Rivero [31] compared the experimental results with the numerical results for styrene drying by adsorption onto activated alumina with standard error (SE) 7.34%.

- Sensitivity analyses of breakthrough times were applied for different flow velocities and different inlet concentration of water vapor in natural gas.

**Table 5.2 Effect of natural gas velocity on Breakthrough time at an inlet water concentration of  $C_i = 40$  ppmv**

Breakthrough time (h)	2100	4100	14000	42000	54000
$u_s$ (m/s) $\times 10^{-3}$	1.97	$4.4 \times 10^{-1}$	$4.49 \times 10^{-2}$	$4.15 \times 10^{-3}$	$4.5 \times 10^{-4}$

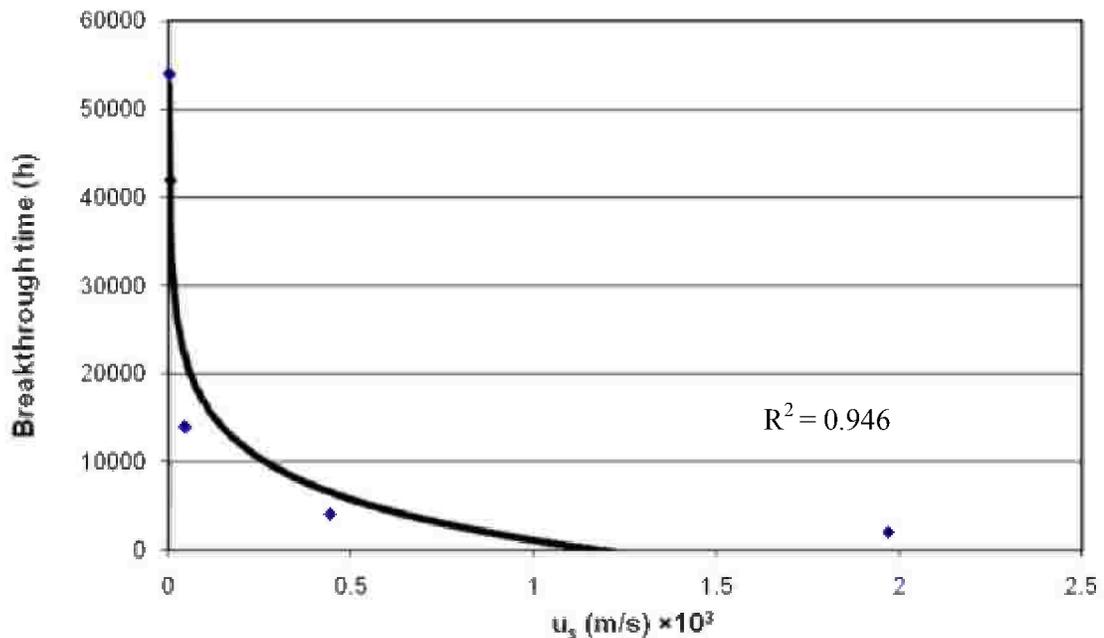

**Figure 5.8 Effect of feed gas velocity on breakthrough time for gas dehydration**


- Figure 5.8 shows the effect of natural feed gas velocity on Breakthrough time at an inlet water concentration of  $C_i = 40$  ppmv.
- Notice that the breakthrough time is increased by decreasing the superficial velocity of the natural gas. That means the relationship between the superficial velocity and time is an inverse relationship.
- This figure clearly shows at low values of superficial velocity up to  $4.5 \times 10^{-7}$  m/s the increase in velocity has strong effect on decreasing the breakthrough time.
- The relation between feed gas superficial velocity ( $u_s$ ) in m/s and breakthrough time ( $t_b$ ) in hours is given by the following equation:

$$t_b = - 6708 \ln (u_s) + 1187.9$$

- From table (5.2) it's clear that at a gas velocity of  $1.97 \times 10^{-3}$  m/s the breakthrough was 2100 hours, the gas velocity applied in the plant is 0.2082 m/s but it is a usual practice to run the adsorption only 48 hours, there after bed regeneration takes place.

**Table (5.3) Effect of inlet water vapor concentration on Breakthrough time at a superficial velocity of  $u_s = 0.2088$  m/s**

<b>Breakthrough time (h)</b>	560	480	300	180	160
<b><math>C_i</math> (ppmv)</b>	40	100	200	300	400

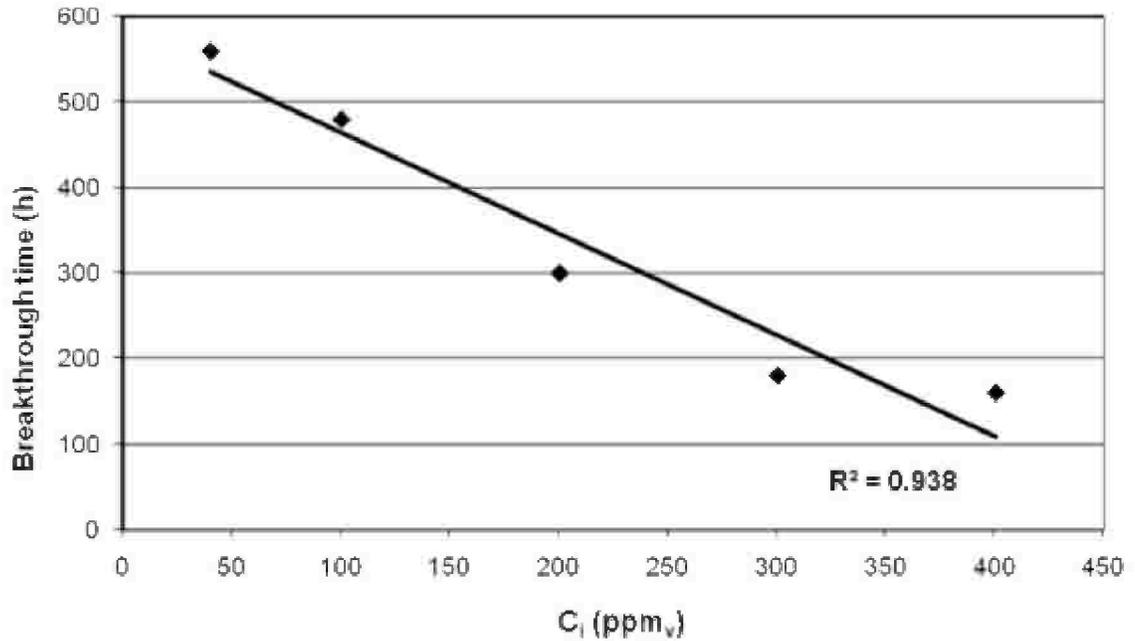


**Figure 5.9 Effect of inlet concentration of feed gas on breakthrough time**

- Figure 5.9 shows the effect of inlet water concentration of natural gas on Breakthrough time at a superficial velocity of  $u_s = 0.2088$  m/s.
- It is noticed that the time decreased almost linearly by increasing the inlet concentration of water vapor. That means the relationship between the inlet concentration of water vapor and time is a reverse correlation.
- In this figure the situation is different than that of the effect of superficial velocity on breakthrough time as it shows a linear decrease of the breakthrough time with the increase in the inlet concentration of water vapor in feed gas.
- The relation between inlet concentration of water vapor ( $C_i$ ) in ppm<sub>v</sub> and breakthrough time ( $t_b$ ) in hours at  $u_s = 0.2088$  m/s is given by the following equation:

$$t_b = - 1.1848 \times C_i + 582.44$$

- Fatemi, Shohreh, [19] compared between two models when changing the particle radius. Also they applied the sensitivity analysis for different temperatures and inlet flow velocities. It was shown, that increasing temperature and inlet flow velocity leads to lower breakthrough time.
- Xi-Gang Yuan [25]: the model was successfully used for prediction of the breakthrough time at different superficial velocities and different bed depth, but it could not predict well the breakthrough time for different vapor concentration.

- Maria J. Rivero [31] obtained the predicted curves for different bed lengths and flow rates. A model which gave standard error (SE) fluctuating between 5.57% and 9.7% was obtained and but it was applied in the laboratory field only.

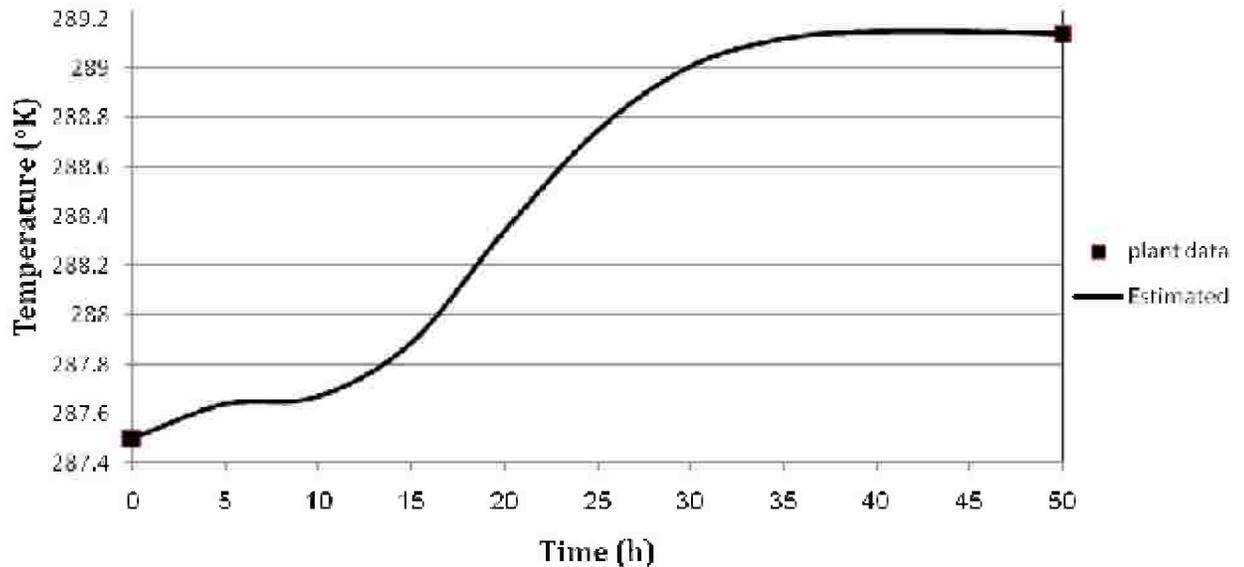

**Figure 5.10: Variation of bed temperature during dehydration step (as estimated by the model) and comparison with the plant data along the bed.**

- Figure 5.10 shows effect of time in the dehydration step on the temperature of gas which increased with the dehydration time increase. This is indicating that the adsorption process is exothermic and the heat effects must be considered during adsorption. The most important consideration is that the major industrial processes are adiabatic and thermal effects cannot be ignored.
- In this figure, only initial and final bed temperatures are shown from plant data.
- M. R. Talaie [17] studied the variation of gas temperature at different times.

### 5.1.2 Second case: separation of nitrogen by carbon molecular sieves.

#### Validation of the mathematical model

Table (5.4) Comparison between Estimated and Plant data

Time (hr)	Plant data N2 (mole %)	Estimated N2 (mole %)	% Deviation
0	97.9	97.9	0
3	97.9	97.8	0.102
6	97.8	97.7	0.102
9	97.6	97.6	0
12	97.6	97.7	0.102

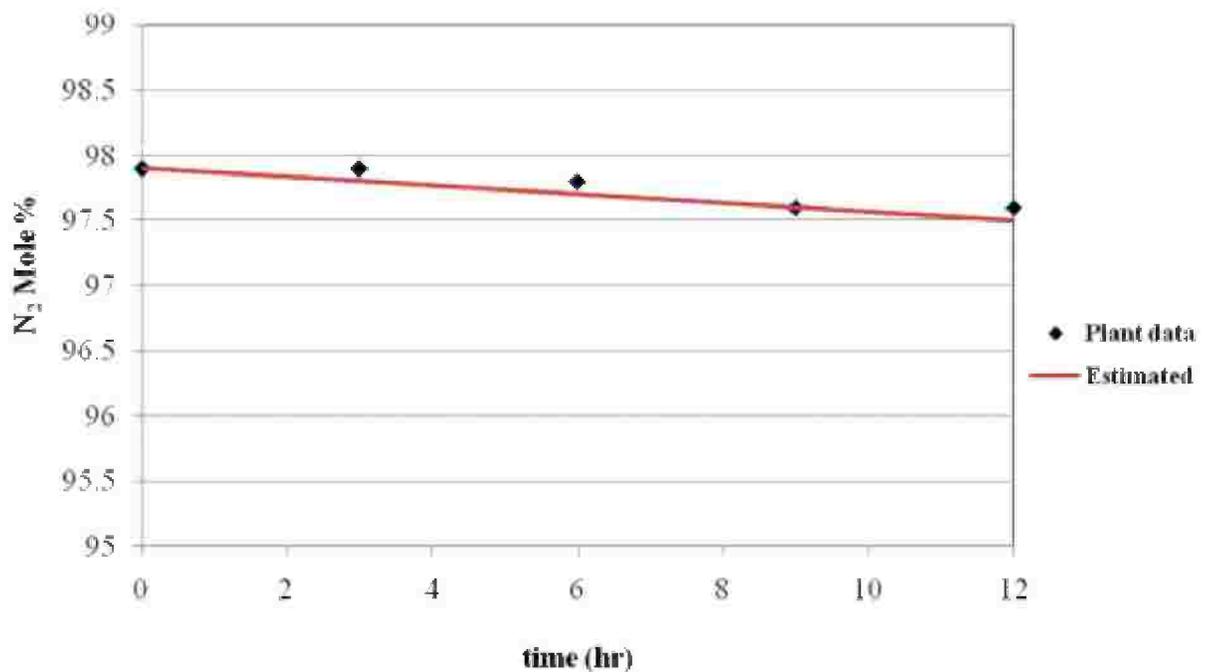


Figure 5.11 comparison between estimated and plant data of produced nitrogen mole percent


- Table 5.4 and figure 5.11 show the validation of the proposed model. Many trials were undertaken in order to improve the prediction capability of the mathematical model by assuming different values for equilibrium constant for N<sub>2</sub> (K) obtain a minimum value of standard error (SE). It is clear that by using value of K = 1.5 (the K value used was

2.9 [15]) the developed model is successful (SE= 2.5%) and it was validated with the plant data.

- Jafar [18] compared the estimated and experimental product purity results and found a good agreement between the model predictions and the actual data. He showed that the produced N<sub>2</sub> purity decreased with increasing the cycle time.
- Mostamand and Mofarahi [15] compared the experimental data for a single bed N<sub>2</sub> – PSA. They concluded from their simulation that the purity of N<sub>2</sub> decreased with the increasing time.
- Sensitivity analyses of breakthrough curves were applied for different flow velocities of air through carbon molecular sieves bed.

**Table 5.5: Effect of inlet air flow velocity on purity of N<sub>2</sub>**

<b>N<sub>2</sub> mol %</b>	99.1	99.02	98.6	97.85	97.7
<b>u<sub>s</sub> (m/s)</b>	0.001	0.002	0.0102	0.025	0.028

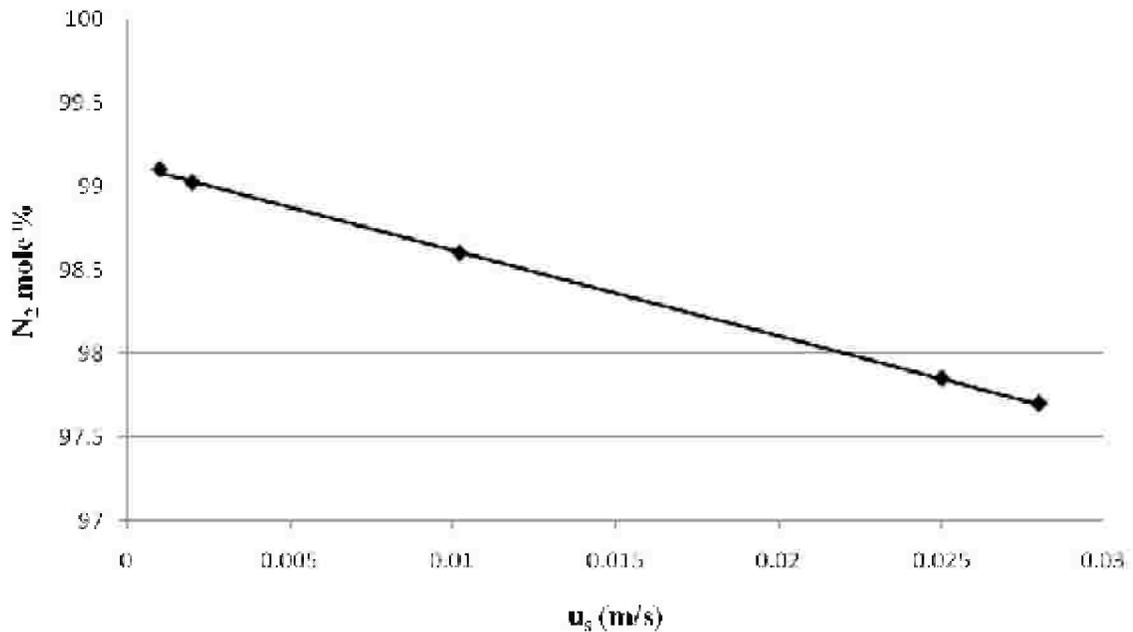

**Figure 5.12 Effect of inlet air flow velocity on N<sub>2</sub> purity in PSA system**

- Figure 5.12 shows the effect of air flow velocity on N<sub>2</sub> purity.
- It is noticed that the purity of N<sub>2</sub> produced decreased by increasing the inlet superficial velocity of the air. That means the relationship between the superficial velocity and time is a negative relationship.
- The relation between inlet air flow velocity (u<sub>s</sub>) in m/s and N<sub>2</sub> mole % is shown by the following equation:

$$\text{N}_2 \text{ mole \%} = -51.35 \times u_s + 99.13$$

- Jafar [21] reported that the results show that the product of the N<sub>2</sub> purity increases with decreasing the inlet velocity.

## **5.2 CONCLUSIONS**

- In the present study, a comprehensive mathematical model was developed to perform parametric study for two cases a natural gas dehydration unit and nitrogen separation by PSA located on Amerya LPG Recovery Plant of Egyptian Natural Gas Company (GASCO).
- The models in two cases were applied and a good agreement between plant data and estimated data was achieved.
- The MATLAB program was used with the system and it is currently being applied to a wide range of plant data, the program can be used for predicting the outlet concentration profile with a very large time interval.

- **In the first case (a natural gas dehydration):**

1. By increasing the time the outlet concentration of water vapor increased because the dehydration beds will enter the saturated zone.
2. On applying the sensitivity analysis technique by the MATLAB program, the program could clearly show the effect of varying inlet concentration of water vapor content in natural gas on breakthrough time. It was noticed that the time decreased almost linearly by increasing the inlet concentration of water vapor. Also the effect of varying natural feed gas velocity on breakthrough time was studied. It was noticed that the breakthrough time is increased by decreasing the superficial velocity of the natural gas.
3. Effect of dehydration step on the temperature of gas and we compared the estimated data with plant data.

**It is clear that the developed model is very successful and SE= 3.07%**

- **In the second case (nitrogen separation from air by PSA):**

1. A model to predict the N<sub>2</sub> gas purity as a function of operating time of PSA unit was developed and good agreement between the plant data and estimated data with **SE= 2.5%**.
2. By increasing the time of adsorption the purity of nitrogen producing decreased, so the system of operation stopped the adsorption cycle and enter in the regeneration cycle to maintain on the high purity of nitrogen produced.
3. Effect of inlet air velocity on the producing of nitrogen purity and it noticed that the product of N<sub>2</sub> purity decreased by increasing the inlet superficial velocity of the air.

## REFERENCES

1. G. McKAY, "Mass transfer processes during the Adsorption of Solutes In aqueous solutions in batch and fixed bed adsorbers", chemical engineering research & design, vol. 62, no. 4, 235-246, 1984.
2. Boyun Guo & Ali Ghalambor, "Natural Gas Engineering Handbook", Houston-Texas, Ch.1, 1-3, 2005.
3. J.M. Coulson and J.F. Richardson, "Chemical engineering" ,vol. 2, 4th edition, 1995.
4. Aitani A.M., "Sour natural gas drying", Hydrocarbon Process. Int. ed., vol. 72, no. 4, 67-73, 1993.
5. A. Karimi and MA. Abdi, "Selective Removal of Water from Supercritical Natural Gas", Society of Petroleum Engineers (SPE), 2006.
6. Babenko V. A. & Kanonchik L. E., "Mathematical modeling of a cylinder with a sorbent and natural gas", Journal of Engineering Physics and Thermo physics; vol. 73 , no 3 , 516 – 527, 2000.
7. Arthur J. Kidnay and William R. Parrish, "Fundamentals of Natural Gas Processing", Taylor & Francis group, 2,7,9-11,13,133-134,139,146-152,160-161, 2006.
8. Francis S. Manning & Richard E. Thompson, "Oilfield Processing of Petroleum", penn Well publishing company, Volume 1, Ch. 9 p. 174-177, 192-195, 1991.
9. "Engineering Data Book", 11<sup>st</sup> edition, volume 2, Gas Processors Association, Ch. 20, 23, 28, 36-37, 1998.
10. D. M. Ruthven, "Principles of adsorption and adsorption process", John Wiley & sons, New York, 1984.
11. Laila Abu-Lail, John A. Bergendahi & Robert W. Thompson, "Mathematical modeling of chloroform adsorption onto fixed bed columns of highly siliceous granular zeolites", AIChE, vol. 31, No. 4, 2012.
12. Jose A.C. Silva, "Sorption and kinetics of CO<sub>2</sub> and CH<sub>4</sub> in binder less beads of 13X zeolite", Microporous and Mesoporous materials, 158, 219-228, 2012.
13. Trizha L. P. Dantas, Alirio E. Rodrigues, Regina F.P.M. Moreira, "Separation of carbon dioxide from flue gas using adsorption on porous solid", Greenhouse gases – Capturing, Utilization and Reduction, 57-80, 2012.
14. Tirzha L.P. Dantas, "Carbon dioxide-nitrogen separation through adsorption on activated carbon in a fixed bed", Chemical Engineering Journal, vol. 169, 11-19, 2011.
15. Ashkan. Mostamand & Masoud. Mofarahi, "Simulation of a single bed pressure swing adsorption for producing nitrogen", International conference on chemical, biological and environmental science, Bangkok Dec., 2011.
16. Alirio E. Rodrigues, "Activated carbon for hydrogen purification by pressure swing adsorption multi-component breakthrough curves and PSA performance", Chemical Engineering Science, 66, 303-317, 2011.
17. M. R. Talaie, "Mathematical modeling of gas dehydration adsorption process", Chemical Engineering Science, vol. 65, 5942-5949, 2010.
18. S. Sinha, "Modeling and Simulation for Pressure swing adsorption system for hydrogen purification", chem. biochem. Eng. Vol.24, 409-414, 2010.
19. Fatemi, Shohreh, "Mathematical modeling of single and multi-component adsorption fixed beds to rigorously predict the mass transfer zone and breakthrough curves", Iran J. Chem. Eng., vol. 28, No. 3, 2009.
20. Marian Simo, "Adsorption/Desorption of water and ethanol on 3A zeolite in near-adiabatic fixed bed", Ind. Eng. Chem. Res., vol. 48, 9247-9260, 2009.

21. Jafar Sadeghzadeh Ahari, "Determination effects of process variables on nitrogen production PSA system by mathematical modeling", *petroleum & coal*, vol. 50, 52-59, 2008.
22. S.M.A. Guelli U. de Souza, "Numerical study of the adsorption of dyes from textile effluents", *Applied mathematical modeling*, 32, 1711-1718, 2008.
23. Santosh K. Gupta, "Modeling and simulation of fixed bed adsorbers (FBAs) for multi-component gaseous separations", *Computer and Chemical Engineering*, vol. 31, 1282-1295, 2007.
24. Christian Jallut, "A double linear driving force approximation for non-isothermal mass transfer modeling through bi-disperse adsorbents", *Chemical Engineering Science*, vol. 62, 4040-4053, 2007.
25. Xi-Gang Yuan, "Experiment and prediction of breakthrough curves for packed bed adsorption of water vapor on cornmeal", *Chemical Engineering and processing*, vol. 45, 747-754, 2006.
26. A. Mendes, "Generalized linear driving force approximation for adsorption of multi-component mixtures", *Chemical Engineering Science*, 61, 3519-3531, 2006.
27. A. Karimi and MA. Abdi, "Selective Removal of Water from Supercritical Natural Gas", *Society of Petroleum Engineers (SPE)*, 2006.
28. V. Stanciu, "separation of nitrogen from air by selective adsorption of carbon molecular sieves", *U.P.B. Sci. Bull., Series A*, vol. 68, No. 2, 2006.
29. Yulong Ding, "Heat transfer of gas flow through a packed bed", *Chemical Engineering Science*, 61, 3532-3542, 2006.
30. Chang-Ha Lee, "Pressure swing adsorption process to purify oxygen using a carbon molecular sieve", *Chemical Engineering Science*, vol. 60, 869-882, 2005.
31. Maria J. Rivero, Raquel Ibanez & M. Inmaculada Ortiz, "Mathematical modeling of styrene drying by adsorption onto activated alumina", *Chemical Engineering Science*, 57, 2589-2592, 2002.
32. D. Bobok and E. Besedova, "Error in the estimation of effective diffusion coefficients from sorption measurements", *Slovak Society of Chemical Engineering*, 54, 482-488, 2000.
33. O'Koye I.P., Benham M. and Thomas K.M., "Adsorption of gases and vapors on carbon molecular sieves", *American Chemical Society*, vol. 3, no. 15, 4054-4059, 1997.
34. Mohamed Arshad Sheeikh, "Adsorption equilibria and rate parameters for nitrogen and methane on maxsorb activated carbon", *gas separation purification*, vol. 10, no. 3, 161-168, 1996.
35. V. N. Vetokhin, "Study and numerical solution of a generalized mathematical model of isothermal adsorption", *Journal of Engineering Physics and Thermophysics*, vol. 67, no. 5, 446-454, 1994.
36. G. Mckay, S. Mckee and H.R.J. Walters, "Solid liquid adsorption based on external mass transfer, macropore and micropore diffusion", *Chemical Engineering Science*, vol. 42, no. 5, 1145-1151, 1987.
37. Clive L. Dym, "Principles of mathematical modeling", Claremont, California, 2004.
38. William L. Luyben, "process modeling, simulation and control for chemical engineers, 2nd edition, McGraw-Hill Book Co, 1999.
39. Bruce E. Poling, "the properties of gases and liquids", McGraw-Hill, fifth edition, 2001.
40. Brian D. Hahn and Daniel T. Valentine, "Essential MATLAB for Engineers and Scientists", third edition, Elsevier Ltd., 2007.

41. H.K. Adel-Aal and Mohamed Aggour and M.A. Fahim, "Petroleum and Gas Field Processing", New York, Ch. 12, 1-2, 2003.
42. John M. Campbell, "Gas Conditioning and Processing", Campbell petroleum series, volume 2, Ch.19, 373-389, 1984.
43. Kevin R. Coombes, Brian R. Hunt, Ronald L. Lipsman, John E. Osborn, and Garrett J. Stuck, "Differential Equations with MATLAB", John Wiley & sons. Inc., 2000.
44. Richard G. Rice and Duong D. Do, "Applied Mathematics and Modeling for Chemical Engineers", 1995.
45. Robert H. Perry & Don W. Green, "Perry's Chemical Engineering Handbook", 7<sup>th</sup> edition, McGraw-Hill, Ch. 5, 48 & Ch. 16, 9,19-22, 1997.
46. A. Vinash Gupta, "Handbook of chemical engineering calculations", 3<sup>rd</sup> edition, 2004.
47. R.T. Jacobsn, E.M. Lemmon, S.G. Penoncello and Z. Shan, "Thermo-physical properties of fluid and material", ch.2, 2000.
48. [www.uop.com](http://www.uop.com)
49. [www.ScienceLab.com](http://www.ScienceLab.com)
50. [www.EngineeringToolBox.com](http://www.EngineeringToolBox.com)

## APPENDICES

### Appendix (A)

Batches 1,2& 3 show the different event values of  $C_i$  &  $C_{out}$   
(Plant data) in three different batches for dehydration of natural gas

**Table A.1: Batch ( 1 )**

Time (h)	$C_i$ ppm <sub>v</sub>	$C_{out}$ ppm <sub>v</sub>
4	15.21	0.02
8	18.06	0.036
12	20.8	0.051
16	21.9	0.056
20	27.76	0.064
24	29.02	0.072
28	31.36	0.079
32	37.21	0.08
36	38.22	0.083
40	40.84	0.084
44	41.88	0.085
48	44.84	0.087

**Table A.2: Batch ( 2 )**

Time (h)	$C_i$ ppm <sub>v</sub>	$C_{out}$ ppm <sub>v</sub>
4	13.62	0.02
8	14.67	0.021
12	15.21	0.035
16	18.53	0.041
20	20.25	0.052
24	23.12	0.059
28	26.5	0.063
32	28.02	0.072
36	30.3	0.08
40	34.74	0.083
44	37.31	0.083
48	40.82	0.089

**Table A.3: Batch ( 3 )**

Time (h)	$C_i$ ppm <sub>v</sub>	$C_{out}$ ppm <sub>v</sub>
4	14.92	0.021
8	17.39	0.022
12	19.04	0.036
16	22.13	0.042
20	24.38	0.055
24	29.03	0.061
28	31.34	0.069
32	34.74	0.074
36	39.51	0.08
40	40.82	0.082
44	44.44	0.085
48	45.99	0.09

**Table A.4** Variation of the temperature during dehydration step and comparison with the plant data along the bed.

Time (h)	0	5	10	15	20	25	30	35	40	45	50	
Estimated	287.5	287.6	287.7	287.9	288.3	288.8	289	289.1	289.2	289.2	289.1	
plant data	287.5	(inlet temperature)					(outlet temperature)					289.1

**Table A.5** Variables and parameters used to solve the mathematical model in this work for separation of N<sub>2</sub> from air on carbon molecular sieve

<b><math>\rho</math> (kg/m<sup>3</sup>)</b>	1.127
<b>F (Nm<sup>3</sup>/h)</b>	138
<b>Bed diam. (m)</b>	0.5
<b>C<sub>0</sub> (ppmv)</b>	0.79
<b>d<sub>p</sub> (m)</b>	0.025
<b><math>\mu</math> (kg/ms)</b>	0.00001902
<b><math>\epsilon_b</math></b>	0.4
<b>C<sub>f</sub> (ppmv)</b>	0.99
<b>R (kg/cm<sup>2</sup>.m<sup>3</sup>/kmol.°K)</b>	0.0847
<b>T (°K)</b>	313
<b>M<sub>air</sub></b>	29
<b>m (kg)</b>	280
<b>P (kg/cm<sup>2</sup>)</b>	7
<b>M<sub>O2</sub></b>	32
<b>M<sub>N2</sub></b>	28
<b>e<sub>1 (O2)</sub> (J)</b>	106.7
<b>e<sub>2 (N2)</sub> (J)</b>	71.4
<b>v<sub>1 (O2)</sub> (Å)</b>	3.467
<b>v<sub>2 (N2)</sub> (Å)</b>	3.798

	<b>O<sub>2</sub></b>	<b>N<sub>2</sub></b>
<b>K1</b>	5.82E-03	1.13E-02
<b>K2</b>	-7.51E-06	-2.80E-05
<b>K3</b>	7.94E-06	3.09E-04
<b>K4</b>	1381	359.7
<b>-Δ(H) (kJ/mol)</b>	13.81	13.39

**Table A.6** Variables and parameters used to solve the mathematical model in this work for dehydration of natural gas on molecular sieve

$\rho$ (kg/m <sup>3</sup> )	43.4
F (m <sup>3</sup> /h)	1608
Bed diam. (m)	2.9
C <sub>i</sub> <sup>*</sup> (ppmv)	2.00E+05
$\rho_b$ (kg/m <sup>3</sup> )	700
C <sub>o</sub> (ppmv)	30
d <sub>p</sub> (m)	3.20E-03
$\mu$ (kg/ms)	5.90E-04
$\epsilon_b$	0.3
$\rho_p$ (kg/m <sup>3</sup> )	2100
C <sub>f</sub> (ppmv)	0.09
R (kg/cm <sup>2</sup> .m <sup>3</sup> /kmol.°K)	0.0847
T (°K)	288
M <sub>gas</sub>	19.06
m <sup>•</sup> (kg)	9928.66
P (kg/cm <sup>2</sup> )	50.8
M <sub>H2O</sub>	18
e <sub>1 (CH4)</sub> (J)	148.6
e <sub>2 (H2O)</sub> (J)	809.1
v <sub>1 (CH4)</sub> (Å)	3.758
v <sub>2 (H2O)</sub> (Å)	2.641

**Table A.7** Equilibrium Rate Parameters and Heats of adsorption of O<sub>2</sub> and N<sub>2</sub> for CMS [15]

	Langmuir Model		Heat of adsorption -Δ(H) (kJ/mol)		Diffusion rate constants, C (s <sup>-1</sup> )	
	O <sub>2</sub>	N <sub>2</sub>	O <sub>2</sub>	N <sub>2</sub>	O <sub>2</sub>	N <sub>2</sub>
<b>Equilibrium Constants</b>						
<b>k1 (mol/g)</b>	5.817x 10 <sup>-3</sup>	1.13 x 10 <sup>-2</sup>	13.81	13.39	0.0275	0.00075
<b>k2 (mol/g K)</b>	-7.512x10 <sup>-6</sup>	-2.8 x 10 <sup>-5</sup>				
<b>k3 (1/kPa)</b>	7.94	30.89x10 <sup>-5</sup>				
<b>k4 (K)</b>	1381	359.7				

**Table A.8** Used parameters in simulation of N<sub>2</sub> -PSA system [21]

<b>Feed composition</b>	21.8% O <sub>2</sub> , 78.2% N <sub>2</sub>
<b>Adsorbent</b>	<b>CMS</b>
<b>L(m)</b>	1.8
<b>R<sub>p</sub>(m)</b>	0.0125
<b>E</b>	0.4
<b>T (°C)</b>	40.0
<b>Blow down pressure (atm)</b>	1.0 atm.
<b>Pressurization pressure (atm)</b>	8.0
<b>Axial Dispersion coefficient (m<sup>2</sup>/s)</b>	4.876 x 10 <sup>-4</sup>
<b>Equilibrium constant for Oxygen (KA)</b>	9.25
<b>Equilibrium constant for Nitrogen (KB)</b>	8.9
<b>LDF constant for Oxygen (kA)(s<sup>-1</sup>)</b>	44.71 x 10 <sup>-3</sup>
<b>LDF constant for Nitrogen (kB)(s<sup>-1</sup>)</b>	7.62 x 10 <sup>-3</sup>
<b>Saturation constant for Oxygen (q<sub>AS</sub>)(mol/m )</b>	2.64 x 10 <sup>3</sup>
<b>Saturation constant for Nitrogen (q<sub>BS</sub>)(mol/m )</b>	2.64 x 10 <sup>3</sup>

**Table A.9** Equilibrium and kinetic data and other common parameters used in the PSA simulation [15]

<b>Adsorbent</b>	<b>Union Carbide molecular sieve RS-10</b>
<b>Feed</b>	Dry air (79% N <sub>2</sub> , 21%O <sub>2</sub> )
<b>Bed length (cm)</b>	101.6
<b>Bed diameter (cm)</b>	2.08
<b>Bed voidage</b>	0.34
<b>Adsorbent particle diameter (cm)</b>	0.08
<b>Adsorbent particle density (g/cm<sup>3</sup>)</b>	1.1
<b>Saturation constant for O<sub>2</sub> (gmol/ cm<sup>3</sup>)</b>	$2.1 \times 10^{-3}$
<b>Saturation constant for N<sub>2</sub> (gmol/ cm<sup>3</sup>)</b>	$2.1 \times 10^{-3}$
<b>equilibrium constant for O<sub>2</sub></b>	2.9
<b>equilibrium constant for N<sub>2</sub></b>	5.9


## Appendix (B)

	212 Avenue Paul Doumer 92500 RUEIL MALMAISON FRANCE	Job <b>MOLE SIEVE</b>
	<b>DESSICANT PROCESS SPECIFICATION</b>	Unit Location Project N° Data sheet N°
Type : 3A	Service : GAS DRYER	EGYPT 15165
<b>REGENERATION GAS CHARACTERISTICS</b>		
Type		Heating Dry gas
Flowrate	kg/hr	15900
Pressure	kg/cm <sup>2</sup> g	51.6
Temperature	°C	260
Water content	mg/Nm <sup>3</sup>	0.34
Massic Co	kcal/K.kg	0.69
Mole mass	kg/kmol	19.06
Density	kg/m <sup>3</sup>	22.3
Compressibility factor		0.99
Cooling Dry gas		37
		15900
		51.6
		0.34
		0.59
		19.06
		42.6
		0.89
<b>CYCLES</b>		
Absorption :	hours	48
Regeneration :	hours	24
including :	-heating -cooling -stand-by	6 3 15
<b>DESSICANT</b>		
Type		Molecular sieve (type 3A)
Bulk Density	g/cm <sup>3</sup>	0.69 - 0.72
Specific Heat	kcal/kg. °C	0.23
Heat of adsorption of water	kcal/kg	1000 max
Average crushing strenght	kg	10 - 11
Beds insulation		External
Volume	m <sup>3</sup>	21.8
Life :	-expected -guaranted	3 3
Maximal pressure drop across bed	kg/cm <sup>2</sup> g	Adsorption : 0.4 / Regeneration : 0.03
<b>ADSORPTION COLUMNS</b>		
Number of columns		3 ( 2 in adsorption , 1 in regeneration)
Dessicant bed diameter	mm	2900
Dessicant bed height	mm	3300
<b>NOTES</b>		
1 - Regeneration of the dessicant is performed by the DRIED GAS available at 51.6 kg/cm <sup>2</sup> g.		
2 - Carbonyl sulphide (COS) formation is minimized		


TABLE 2.3 Physical Constants and Fixed Points

	Molecular Weight (g/mol)	Critical Temperature (K)	Critical Pressure (MPa)	Critical Density (g/cm <sup>3</sup> )	Triple Point (K)	Normal Boiling Point (K)	Acentric Factor	Triple Yarnent (D)
Methane	16.042	190.55	4.8392	163.66	90.694	111.57	0.0114	0
Ethane	30.070	305.33	4.8718	208.58	90.352	184.55	0.0863	0
Propane	44.096	369.82	4.2471	213.50	35.460	231.06	0.1524	0.083
Butane	58.122	425.13	3.7550	221.64	134.87	272.56	0.2060	0.02
Isobutane	58.122	407.82	3.6400	224.36	113.56	267.48	0.1850	0.152
Pentane	72.146	469.79	3.3700	233.60	143.47	309.21	0.2519	0.37
Isopentane	72.146	460.35	3.3557	236.00	112.65	300.97	0.2285	0.10
Neopentane	72.151	433.75	3.1963	242.00	246.60	282.63	0.1960	0
Hexane	86.173	507.82	3.0390	233.18	177.83	341.86	0.2709	0.05
Heptane	100.20	540.13	2.7366	232.00	182.55	371.55	0.3489	
Octane	114.23	569.32	2.4970	234.59	216.37	398.77	0.3939	
Nonane	128.17	605.40	2.2335	235.03	195.50	429.82	0.4569	1.47
Decane	142.17	639.60	1.9860	235.69	83.805	473.02	-0.0022	0
Undecane	156.27	672.15	1.7640	236.00	378.70	533.23	0.5093	
Dodecane	170.33	704.15	1.5773	236.60	216.59	—	0.5239	0
Carbon monoxide	28.011	132.80	3.4935	505.92	67.127	61.668	0.0510	0.16
Cyclohexane	84.151	553.64	4.0750	273.00	279.47	353.89	0.2093	0.30
Cyclopropane	42.081	398.30	5.5797	258.50	145.70	241.67	0.1305	
Deuterium	4.0282	38.340	1.6653	60.797	18.719	23.509	-0.1750	0
Hydrogen	2.0159	20.28	1.0418	34.24	13.816	169.58	0.0866	0
Fluorine	38.001	144.41	5.1724	292.86	33.481	85.037	0.0649	0
Heavy water	20.027	647.31	21.671	238.00	278.97	374.56	0.3640	1.90
Helium	4.0026	5.1953	0.2275	66.641	2.1768	4.2244	-0.3820	0
Hydrogen	2.0159	53.190	1.3159	30.118	13.957	20.277	0.2140	0
Hydrogen sulfide	34.082	373.80	9.1109	237.41	187.70	212.86	0.0960	0.90

PHYSICAL AND CHEMICAL PROPERTIES

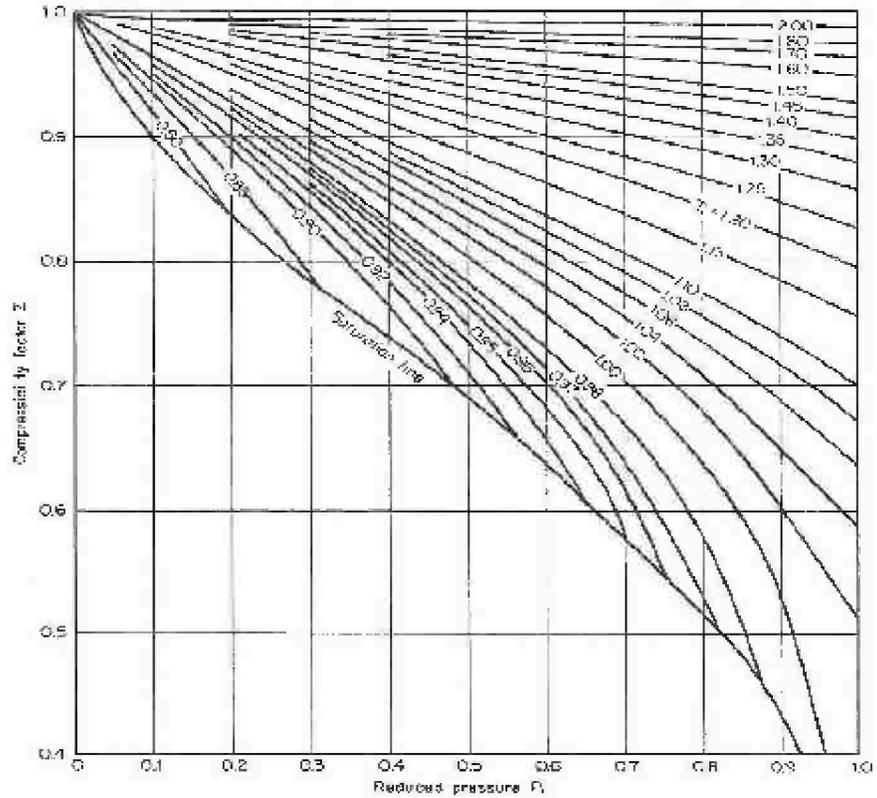

Generalized compressibility factor;  $Z_c = 0.27$ ; low pressure range (Lustsen et al., University of Wisconsin Engineering Experiment Station, 1955)

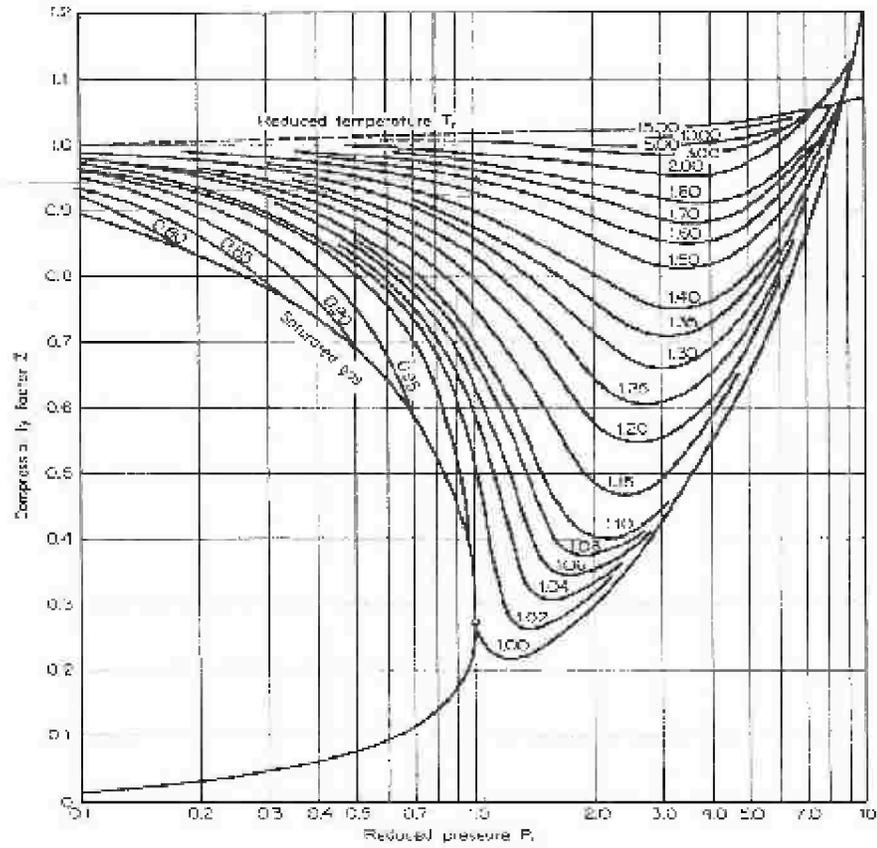

**FIGURE 1.3** Generalized compressibility factor;  $Z_c = 0.27$ ; high-pressure range. (Lyden et al., University of Wisconsin Engineering Experiment Station, 1935.)

**TABLE 19.1**  
**Basic Characteristics of Molecular Sieves**

Basic Type	Nominal Pore Diameter (Angstroms)	Available Form	Hydration H <sub>2</sub> O Capacity (% w/w) <sup>a</sup>	Molecules Adsorbed <sup>b</sup>	Molecules Excluded	Applications
3A	3	Powder 1/16-in. Pellets 1/8-in. Pellets	23 22 22	Molecules with an effective diameter <3 angstroms, including H <sub>2</sub> O and NH <sub>3</sub>	Molecules with an effective diameter >3 angstroms, e.g. ethane	The preferred Molecular Sieve adsorbent for the commercial dehydration of unpressured hydrocarbon streams such as cracked gas, propylene, benzene, and acetylene. It is also useful drying polar liquids such as methanol and ethanol.
4A	4	Powder 1/16-in. Pellets 1/8-in. Pellets 8 x 12 Beads 4 x 4 Beads 14 x 20 Mesh	28.5 22 22 22 22	Molecules with an effective diameter <4 angstroms, including ethanol, H <sub>2</sub> O, CO <sub>2</sub> , SO <sub>2</sub> , C <sub>2</sub> H <sub>6</sub> , C <sub>3</sub> H <sub>8</sub> , and C <sub>4</sub> H <sub>10</sub>	Molecules with an effective diameter >4 angstroms, e.g. propane	The preferred Molecular Sieve adsorbent for water dehydration in a closed gas or liquid system. It is used as a static desiccant in household refrigeration systems; in packaging of drugs, electronic components and perishable chemicals; and as a water scavenger in paint and plastic systems. Also used commercially in drying saturated hydrocarbon streams.
5A	5	Powder 1/16-in. Pellets 1/8-in. Pellets	25 21.5 21.5	Molecules with an effective diameter <5 angstroms, including n-C <sub>4</sub> H <sub>9</sub> OH <sup>c</sup> , n-C <sub>3</sub> H <sub>7</sub> <sup>d</sup> , C <sub>2</sub> H <sub>6</sub> to C <sub>12</sub> H <sub>26</sub> , B, 12	Molecules with an effective diameter >5 angstroms, e.g. iso compounds and all 4 carbon rings	Separates normal paraffins from branched-chain and cyclic hydrocarbons through a selective adsorption process.
10X	8	Powder 1/16-in. Pellets 1/8-in. Pellets	36 28 28	Isoparaffins and Olefins, C <sub>4</sub> H <sub>6</sub> , Molecules with an effective diameter <8 angstroms	Di-n-butylamine and large	Aromatic hydrocarbon separation
13X	10	Powder 1/16-in. Pellets 1/8-in. Pellets	36 28.5 28.5	Molecules with an effective diameter <10 angstroms	Molecules with an effective diameter >10 angstroms, e.g. (C <sub>4</sub> F <sub>10</sub> ) <sub>2</sub>	Used commercially for general gas drying, air purification (simultaneous removal of H <sub>2</sub> O and CO <sub>2</sub> ) and liquid dehydration and natural gas sweetening (H <sub>2</sub> S and mercaptan removal).

16-10 ADSORPTION AND ION EXCHANGE

Physical Properties of Adsorbents							
Material and uses	Shape of particles	Size range, U.S. standard mesh <sup>a</sup>	Porosity, %	Bulk dry density, (g/L)	Average pore diameter, nm	Surface area, m <sup>2</sup> /g	Capacity, mg/g (dry)
<b>Aluminas</b>							
Low-surface (fluoride catalyst)	G, S	5-14, 30	40	0.70	7	0.32	0.0
High-surface (drying, separation)	G	Various	87	0.82	4-14	0.65-0.66	0.0
Electron, CrCl <sub>3</sub> catalyst	G	20, 30	90	0.91	1.5	0.2	0.25-0.53
Aluminum hydride	G	6-20, 30	95	0.88	5	0.2	0.22
Chromatography (ion exchange)	G, P, S	80-200, 30	70	0.60			0.1-0.2
<b>Silicates and silicofluorates</b>							
<b>Molecular sieves</b>							
Type 3A (zeolite)	S, C, F	Various	40	0.52-0.69	0.3	0.7	0.52-0.69
Type 4A (zeolite)			42	0.5-0.67	0.4	0.7	0.55-0.58
Type 5A (zeolite)			43	0.5-0.63	0.6	0.7	0.5-0.55
Type 13X (zeolite)			35	0.5-0.64	1.0	0.3	0.25-0.38
Silicofluoride (chromatography)	S, C, F	Various		0.4-0.61	0.6	0.1	0.15-0.18
Deionized water (zeolite)	S, C, F	Various		0.4-0.55	0.5	0.7-0.8	0.5-0.58
Aluminum (zeolite)				0.58	0.3-0.5		0.12
Carbon (zeolite)				0.72	0.4-0.5		0.28
Zeolite (zeolite)	S	14-40		0.61	0		
Zeolite (zeolite)	S	Various	25-40	1.0	0.57		
Aluminum (zeolite)	G, P	Various	35-48	0.70-0.85	0.5	0.2-0.3	0.5-0.55
Magnesium silicate (chromatography)	G, P	Various	32	0.6		0.15-0.20	
Calcium silicate (chromatography)	P	Various	70-80	0.20		0.1	
Carbon (zeolite) (chromatography)	G	1-5		0.85			
Carbon (zeolite) (chromatography)	G, P	200		0.60			
Chromatography (ion exchange)	G	Various		0.4-0.50		0.2-0.3	
<b>Carbons</b>							
Shell-based	G	Various	40	0.45-0.55	5	0.3-0.6	0.40
Wood-based	G	Various	30	0.55-0.50		0.3-0.6	0.50
Petroleum-based	G, C	Various	40	0.45-0.55	2	0.3-0.2	0.4-0.4
Peat-based	G, C, P	Various	55	0.65-0.50	1-4	0.3-0.6	0.5
Lignite-based	G, P	Various	10-20	0.40-0.70	0	0.2-0.7	0.3
Biomass-based	G, P	5-50, 30-40	60-90	0.40-0.60	2-4	0.2-0.7	0.3
Synthetic (zeolite) (chromatography)	S	20-100	40-50	0.48-0.60		0.1-0.2	0.2
Carbon (zeolite) (chromatography)	C	Various	35-40	0.5-0.7	0.2-0.3	0.1-0.1	0.5-0.20
<b>Organic polymers</b>							
Polystyrene (ion exchange)	S	20-60	4-40	0.54	4-10	0.2-0.7	
Zeolite (ion exchange)	G, S	20-60	2-50	0.35-0.70	10-50	0.15-0.4	
Zeolite (ion exchange)	C	15-50	35	0.42		0.05-0.15	0.5-0.55

<sup>a</sup>Shapes: C, rodlike; F, pellets; P, fibrous; S, granules; G, coarse; S, spheres.  
 U.S. Standard sieve sizes (given in parentheses) correspond to the following diameters and meshes: 20 (0.85), 30 (0.60), 40 (0.425), 50 (0.30), 60 (0.25), 70 (0.21), 80 (0.175), 100 (0.15), 120 (0.125), 150 (0.10), 200 (0.075).

## Zeolite molecular sieve characteristics and applications

Type†	Nominal Pore Diameter Angstroms	Common Form	Bulk Density lb/cu. ft. (gm/cc)	Heat of Adsorption (max) btu/lb. H <sub>2</sub> O (kcal/kg H <sub>2</sub> O)	Equilibrium H <sub>2</sub> O Capacity* wt.-%	Molecules Adsorbed**
3A	3	Powder	35 (0.56)	1000	26	Molecules with an effective diameter <3 angstroms including H <sub>2</sub> O and NH <sub>3</sub>
		1/16-inch Pellets	40 (0.64)	0.800	21	
		1/8-inch Pellets	40 (0.64)		21	
		8 x 12 Beads	44 (0.71)		21	
		4 x 8 Beads	44 (0.71)		21	
4A	4	Powder	32 (0.51)	1800	27	Molecules with an effective diameter <4 angstroms including ethanol, H <sub>2</sub> S, CO <sub>2</sub> , SO <sub>2</sub> , C <sub>2</sub> H <sub>4</sub> , C <sub>2</sub> H <sub>6</sub> and C <sub>3</sub> H <sub>8</sub>
		1/16-inch Pellets	44 (0.71)	0.650	22	
		1/8-inch Pellets	40 (0.71)		22	
		8 x 12 Beads	44 (0.71)		27	
		4 x 8 Beads	44 (0.71)		22	
14 x 20 Mesh	44 (0.71)	21				
5A	5	Powder	32 (0.51)	1600	26	Molecules with an effective diameter <5 angstroms including i-C <sub>4</sub> H <sub>10</sub> Oil, n-C <sub>4</sub> H <sub>10</sub> , C <sub>3</sub> H <sub>8</sub> or C <sub>2</sub> H <sub>2</sub> , E. 12
		1/16-inch Pellets	44 (0.71)	0.600	21.5	
		1/8-inch Pellets	44 (0.71)		21.5	
13X	8	Powder	27 (0.43)	1800	30	Molecules with an effective diameter <8 angstroms including C <sub>6</sub> H <sub>6</sub> , C <sub>8</sub> H <sub>8</sub>
		1/16-inch Pellets	40 (0.64)	0.800	26	
		1/8-inch Pellets	40 (0.64)		26	
		8 x 12 Beads	40 (0.64)		26	
		4 x 8 Beads	40 (0.64)		26	

†Chart depicts basic molecular sieve types only. In all applications, these basic forms are customized for specific use.

\*lbs H<sub>2</sub>O/100 lbs activated adsorbent at 17.5 corr H<sub>2</sub>O at 25°C. \*\*each type adsorbs listed molecules plus those of preceding type.





**Thermodynamic Properties of Nitrogen (Continued)**

Temperature °K	Pressure MPa	Density kg/m <sup>3</sup>	Volume m <sup>3</sup> /kmol	Enthalpy kJ/mol	Enthalpy kJ/mol	Entropy J/mol·K	C <sub>p</sub> J/mol·K	Heat capacity kJ/mol·K	Heat capacity kJ/mol·K	Thermal conductivity W/m·K	Viscosity mPa·s
100.0	1.000	2.0916	14.811	1.7573	2.4155	0.19557	0.058769	19.116	15.070	14.470	5.1847
110.0	1.3526	2.3856	14.191	1.7577	2.3851	0.19121	0.056882	19.228	14.510	14.554	5.7116
115.0	1.5977	2.5297	13.827	1.7102	2.3176	0.18359	0.055285	19.316	14.336	14.515	6.0980
118.0	1.8070	2.6738	13.609	1.6150	2.2449	0.17630	0.053921	19.370	14.195	14.500	6.4482
119.0	1.9153	2.7155	13.544	1.5200	2.2251	0.17438	0.053733	19.377	14.177	14.496	6.5874
119.5	1.9588	2.7373	13.524	1.5075	2.2176	0.17404	0.053733	19.377	14.177	14.496	6.5874
120.0	2.0023	2.7591	13.504	1.4950	2.2101	0.17370	0.053733	19.377	14.177	14.496	6.5874
120.5	2.0458	2.7809	13.484	1.4825	2.2026	0.17336	0.053733	19.377	14.177	14.496	6.5874
121.0	2.0893	2.8027	13.464	1.4700	2.1951	0.17302	0.053733	19.377	14.177	14.496	6.5874
121.5	2.1328	2.8245	13.444	1.4575	2.1876	0.17268	0.053733	19.377	14.177	14.496	6.5874
122.0	2.1763	2.8463	13.424	1.4450	2.1801	0.17234	0.053733	19.377	14.177	14.496	6.5874
122.5	2.2198	2.8681	13.404	1.4325	2.1726	0.17200	0.053733	19.377	14.177	14.496	6.5874
123.0	2.2633	2.8899	13.384	1.4200	2.1651	0.17166	0.053733	19.377	14.177	14.496	6.5874
123.5	2.3068	2.9117	13.364	1.4075	2.1576	0.17132	0.053733	19.377	14.177	14.496	6.5874
124.0	2.3503	2.9335	13.344	1.3950	2.1501	0.17098	0.053733	19.377	14.177	14.496	6.5874
124.5	2.3938	2.9553	13.324	1.3825	2.1426	0.17064	0.053733	19.377	14.177	14.496	6.5874
125.0	2.4373	2.9771	13.304	1.3700	2.1351	0.17030	0.053733	19.377	14.177	14.496	6.5874
125.5	2.4808	3.0000	13.284	1.3575	2.1276	0.16996	0.053733	19.377	14.177	14.496	6.5874
126.0	2.5243	3.0218	13.264	1.3450	2.1201	0.16962	0.053733	19.377	14.177	14.496	6.5874
126.5	2.5678	3.0436	13.244	1.3325	2.1126	0.16928	0.053733	19.377	14.177	14.496	6.5874
127.0	2.6113	3.0654	13.224	1.3200	2.1051	0.16894	0.053733	19.377	14.177	14.496	6.5874
127.5	2.6548	3.0872	13.204	1.3075	2.0976	0.16860	0.053733	19.377	14.177	14.496	6.5874
128.0	2.6983	3.1090	13.184	1.2950	2.0901	0.16826	0.053733	19.377	14.177	14.496	6.5874
128.5	2.7418	3.1308	13.164	1.2825	2.0826	0.16792	0.053733	19.377	14.177	14.496	6.5874
129.0	2.7853	3.1526	13.144	1.2700	2.0751	0.16758	0.053733	19.377	14.177	14.496	6.5874
129.5	2.8288	3.1744	13.124	1.2575	2.0676	0.16724	0.053733	19.377	14.177	14.496	6.5874
130.0	2.8723	3.1962	13.104	1.2450	2.0601	0.16690	0.053733	19.377	14.177	14.496	6.5874
130.5	2.9158	3.2180	13.084	1.2325	2.0526	0.16656	0.053733	19.377	14.177	14.496	6.5874
131.0	2.9593	3.2398	13.064	1.2200	2.0451	0.16622	0.053733	19.377	14.177	14.496	6.5874
131.5	3.0028	3.2616	13.044	1.2075	2.0376	0.16588	0.053733	19.377	14.177	14.496	6.5874
132.0	3.0463	3.2834	13.024	1.1950	2.0301	0.16554	0.053733	19.377	14.177	14.496	6.5874
132.5	3.0898	3.3052	13.004	1.1825	2.0226	0.16520	0.053733	19.377	14.177	14.496	6.5874
133.0	3.1333	3.3270	12.984	1.1700	2.0151	0.16486	0.053733	19.377	14.177	14.496	6.5874
133.5	3.1768	3.3488	12.964	1.1575	2.0076	0.16452	0.053733	19.377	14.177	14.496	6.5874
134.0	3.2203	3.3706	12.944	1.1450	2.0001	0.16418	0.053733	19.377	14.177	14.496	6.5874
134.5	3.2638	3.3924	12.924	1.1325	1.9926	0.16384	0.053733	19.377	14.177	14.496	6.5874
135.0	3.3073	3.4142	12.904	1.1200	1.9851	0.16350	0.053733	19.377	14.177	14.496	6.5874
135.5	3.3508	3.4360	12.884	1.1075	1.9776	0.16316	0.053733	19.377	14.177	14.496	6.5874
136.0	3.3943	3.4578	12.864	1.0950	1.9701	0.16282	0.053733	19.377	14.177	14.496	6.5874
136.5	3.4378	3.4796	12.844	1.0825	1.9626	0.16248	0.053733	19.377	14.177	14.496	6.5874
137.0	3.4813	3.5014	12.824	1.0700	1.9551	0.16214	0.053733	19.377	14.177	14.496	6.5874
137.5	3.5248	3.5232	12.804	1.0575	1.9476	0.16180	0.053733	19.377	14.177	14.496	6.5874
138.0	3.5683	3.5450	12.784	1.0450	1.9401	0.16146	0.053733	19.377	14.177	14.496	6.5874
138.5	3.6118	3.5668	12.764	1.0325	1.9326	0.16112	0.053733	19.377	14.177	14.496	6.5874
139.0	3.6553	3.5886	12.744	1.0200	1.9251	0.16078	0.053733	19.377	14.177	14.496	6.5874
139.5	3.6988	3.6104	12.724	1.0075	1.9176	0.16044	0.053733	19.377	14.177	14.496	6.5874
140.0	3.7423	3.6322	12.704	9.9500	1.9101	0.16010	0.053733	19.377	14.177	14.496	6.5874
140.5	3.7858	3.6540	12.684	9.8925	1.9026	0.15976	0.053733	19.377	14.177	14.496	6.5874
141.0	3.8293	3.6758	12.664	9.8350	1.8951	0.15942	0.053733	19.377	14.177	14.496	6.5874
141.5	3.8728	3.6976	12.644	9.7775	1.8876	0.15908	0.053733	19.377	14.177	14.496	6.5874
142.0	3.9163	3.7194	12.624	9.7200	1.8801	0.15874	0.053733	19.377	14.177	14.496	6.5874
142.5	3.9598	3.7412	12.604	9.6625	1.8726	0.15840	0.053733	19.377	14.177	14.496	6.5874
143.0	4.0033	3.7630	12.584	9.6050	1.8651	0.15806	0.053733	19.377	14.177	14.496	6.5874
143.5	4.0468	3.7848	12.564	9.5475	1.8576	0.15772	0.053733	19.377	14.177	14.496	6.5874
144.0	4.0903	3.8066	12.544	9.4900	1.8501	0.15738	0.053733	19.377	14.177	14.496	6.5874
144.5	4.1338	3.8284	12.524	9.4325	1.8426	0.15704	0.053733	19.377	14.177	14.496	6.5874
145.0	4.1773	3.8502	12.504	9.3750	1.8351	0.15670	0.053733	19.377	14.177	14.496	6.5874
145.5	4.2208	3.8720	12.484	9.3175	1.8276	0.15636	0.053733	19.377	14.177	14.496	6.5874
146.0	4.2643	3.8938	12.464	9.2600	1.8201	0.15602	0.053733	19.377	14.177	14.496	6.5874
146.5	4.3078	3.9156	12.444	9.2025	1.8126	0.15568	0.053733	19.377	14.177	14.496	6.5874
147.0	4.3513	3.9374	12.424	9.1450	1.8051	0.15534	0.053733	19.377	14.177	14.496	6.5874
147.5	4.3948	3.9592	12.404	9.0875	1.7976	0.15500	0.053733	19.377	14.177	14.496	6.5874
148.0	4.4383	3.9810	12.384	9.0300	1.7901	0.15466	0.053733	19.377	14.177	14.496	6.5874
148.5	4.4818	4.0028	12.364	8.9725	1.7826	0.15432	0.053733	19.377	14.177	14.496	6.5874
149.0	4.5253	4.0246	12.344	8.9150	1.7751	0.15398	0.053733	19.377	14.177	14.496	6.5874
149.5	4.5688	4.0464	12.324	8.8575	1.7676	0.15364	0.053733	19.377	14.177	14.496	6.5874
150.0	4.6123	4.0682	12.304	8.8000	1.7601	0.15330	0.053733	19.377	14.177	14.496	6.5874
150.5	4.6558	4.0900	12.284	8.7425	1.7526	0.15296	0.053733	19.377	14.177	14.496	6.5874
151.0	4.6993	4.1118	12.264	8.6850	1.7451	0.15262	0.053733	19.377	14.177	14.496	6.5874
151.5	4.7428	4.1336	12.244	8.6275	1.7376	0.15228	0.053733	19.377	14.177	14.496	6.5874
152.0	4.7863	4.1554	12.224	8.5700	1.7301	0.15194	0.053733	19.377	14.177	14.496	6.5874
152.5	4.8298	4.1772	12.204	8.5125	1.7226	0.15160	0.053733	19.377	14.177	14.496	6.5874
153.0	4.8733	4.1990	12.184	8.4550	1.7151	0.15126	0.053733	19.377	14.177	14.496	6.5874
153.5	4.9168	4.2208	12.164	8.3975	1.7076	0.15092	0.053733	19.377	14.177	14.496	6.5874
154.0	4.9603	4.2426	12.144	8.3400	1.7001	0.15058	0.053733	19.377	14.177	14.496	6.5874
154.5	5.0038	4.2644	12.124	8.2825	1.6926	0.15024	0.053733	19.377	14.177	14.496	6.5874
155.0	5.0473	4.2862	12.104	8.2250	1.6851	0.14990	0.053733	19.377	14.177	14.496	6.5874
155.5	5.0908	4.3080	12.084	8.1675	1.6776	0.14956	0.053733	19.377	14.177	14.496	6.5874
156.0	5.1343	4.3298	12.064	8.1100	1.6701	0.14922	0.053733	19.377	14.177	14.496	6.5874
156.5	5.1778	4.3516	12.044	8.0525	1.6626	0.14888	0.053733	19.377	14.177	14.496	6.5874
157.0	5.2213	4.3734	12.024	7.9950	1.6551	0.14854	0.053733	19.377	14.177	14.496	6.5874
157.5	5.2648	4.3952	12.004	7.9375	1.6476	0.14820	0.053733	19.377	14.177	14.496	6.5874
158.0	5.3083	4.4170	11.984	7.8800	1.6401	0.14786	0.053733	19.377	14.177	14.496	6.5874
158.5	5.3518	4.4388	11.964	7.8225	1.6326	0.14752	0.053733	19.377	14.177	14.496	6.5874
159.0	5.3953	4.4606	11.944	7.7650	1.6251	0.14718	0.053733	19.377	14.177	14.496	6.5874
159.5	5.4388	4.4824	11.924	7.7075	1.6176	0.14684	0.053733	19.377	14.177	14.496	6.5874
160.0	5.4823	4.5042	11.904	7.6500	1.6101	0.14650	0.053733	19.377	14.177	14.496	6.5874
160.5											



Resources, Tools and Basic Information for Engineering and Design of Technical Applications!

Custom Search

## Air Properties

Temperature, density, specific heat, thermal conductivity, expansion coefficient, kinematic viscosity and Prandtl's number for temperatures ranging **-150 - 400 °C**

Common properties for air at atmospheric pressure are indicated the table below

Temperature - t - (°C)	Density - ρ - (kg/m <sup>3</sup> )	Specific heat capacity - c <sub>p</sub> - (kJ/kg.K)	Thermal conductivity - λ - (W/m.K)	Kinematic viscosity - ν - x 10 <sup>-6</sup> (m <sup>2</sup> /s)	Expansion coefficient - β - x 10 <sup>-3</sup> (1/K)	Prandtl's number - Pr -
-150	2.793	1.026	0.0116	3.08	8.21	0.76
-100	1.980	1.009	0.0160	5.95	5.82	0.74
-50	1.534	1.005	0.0204	9.55	4.51	0.725
0	1.293	1.005	0.0243	13.30	3.67	0.715
20	1.205	1.005	0.0257	15.11	3.43	0.713
40	1.127	1.005	0.0271	16.97	3.20	0.711
60	1.067	1.009	0.0285	18.90	3.00	0.709

## ملخص الرسالة

- مما لا شك فيه أن استخدام الحاسب الآلي في مجال معالجة الغاز الطبيعي أمر ضروري لتوفير الكثير من الجهد والمال معاً. وقد ساعد تناول النماذج الرياضية لإجراء الأبحاث المختلفة لتحسين أداء وحدات المعالجة المختلفة.
- تناول هذا البحث عمل اختبار وتطوير لنموذج رياضي باستخدام برنامج كمبيوتر لحاليتين تم دراستهم. إحداهما وحدة تجفيف الغاز الطبيعي باستخدام المناخل الجزيئية والتوقع بتركيز المحتوي المائي للغاز الطبيعي بعد خروجه من وحدة التجفيف وكذلك التوزيع الحراري داخل جهاز التجفيف. والثانية وحدة توليد النيتروجين من الهواء باستخدام المناخل الجزيئية الكربونية وقد تم دراسة تأثير تغيير سرعات هواء التغذية علي نقاوة النيتروجين المنتج باستخدام الامتزاز بالضغط المتأرجح (pressure swing adsorption).  
• النموذج الرياضي الاول يعتمد علي المعادلات التفاضلية الجزيئية للموازنة المادية والحرارية مع وضع بعض الافتراضات حتي تستخدم لحل هذه المعادلات. والنموذج الثاني لإنتاج النيتروجين وقد تم تطبيق الموازنة المادية.
- كما تم تطبيق تقنية تحليل الحساسية (Sensitivity analysis) لمعرفة مدي دقة النموذج ومدي تطبيقه علي وحدات تجفيف الغاز الطبيعي باستخدام المناخل الجزيئية ووحدة توليد النيتروجين من الهواء باستخدام المناخل الجزيئية الكربونية وذلك باستخدام تركيزات مختلفة للمحتوي المائي لغازات التغذية وكذلك مع تغيير سرعات غازات التغذية المارة من خلال وحدة تجفيف الغاز الطبيعي نظرياً و تم الوصول الي علاقات رياضية لتلك التأثيرات، كما تم التوصل الي علاقة رياضية لمعرفة مدي تأثير تغيير سرعات الهواء المغذية لوحدة توليد النيتروجين علي نقاوة النيتروجين المنتج.
- تم اختبار النموذج الرياضي وتم تطويره ليتطابق مع وحدة تجفيف الغاز الطبيعي باستخدام المناخل الجزيئية ووحدة توليد النيتروجين من الهواء باستخدام المناخل الجزيئية الكربونية المستخدمة بمصنع استخلاص البوتاجاز بالعامرية التابع للشركة المصرية للغازات الطبيعية وقد تم عمل برنامج مساعدة علي الحاسب الآلي لحل النموذج الرياضي باستخدام Matlab.
- كما تناول البحث جزءاً نظرياً شارحاً فيه الطرق المختلفة لعملية التجفيف و الامتزاز بالضغط المتأرجح.



جامعة الإسكندرية  
كلية الهندسة  
الهندسة الكيميائية

## تطوير نموذج رياضي لتجفيف الغاز الطبيعي وإنتاج غاز النيتروجين النقي

رسالة علمية

مقدمة إلى الدراسات العليا بكلية الهندسة – جامعة الإسكندرية

استيفاء للدراسات المقررة للحصول على درجة الدكتوراه

مقدمه من

مهندس / محمد السيد أحمد جاد

فبراير 2015