

**CHAPTER 6****ADDITIONAL TOPICS**



## 6.1 INTRODUCTION

This chapter presents some topics of interest to the structural engineers. First, an introduction to the finite element method is given as an outcome of the stiffness matrix method approach II of Chapter 5. Second, the influence lines of statically indeterminate structures are presented. Finally, some examples are given utilizing the computer softwares to verify some of the examples presented in this book.

## 6.2 AN INTRODUCTION TO THE FINITE ELEMENT METHOD

The finite element method is a tool to solve one-dimensional, two-dimensional, and three-dimensional structures with approximation instead of solving complicated partial differential equations. The structure is discretized into a set of elements joined together at some points called nodes or nodal points. These nodes are similar to the joints in the one-dimensional structures which were investigated in the previous chapters. The nodes could be the common corners between the elements, or chosen between the boundaries of the elements, as shown in Figure 6.1. The similarity in the concept between one-dimensional skeleton structures and two- or three-dimensional structures, in terms of discretization is also shown in Figure 6.1.

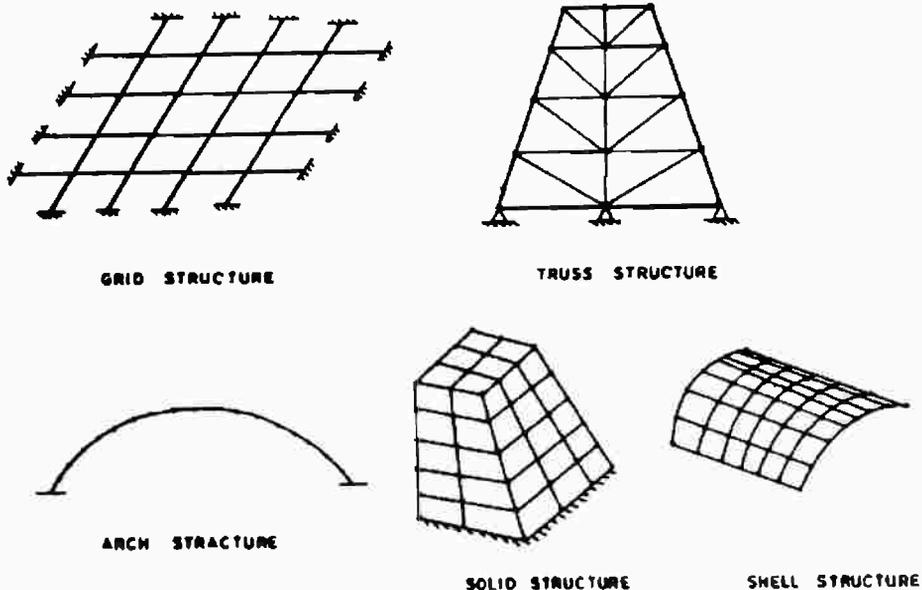


Figure 6.1

It is obvious that in one-dimensional structures the element is a one-dimensional member, as was analyzed in Chapters 3, 4, and 5. In two-dimensional structures, the element is a two-dimensional plate or shell element. The three-dimensional element could be a cube, prism, or a tetrahedron, either with straight sides or curved sides, as shown in Figure 6.2

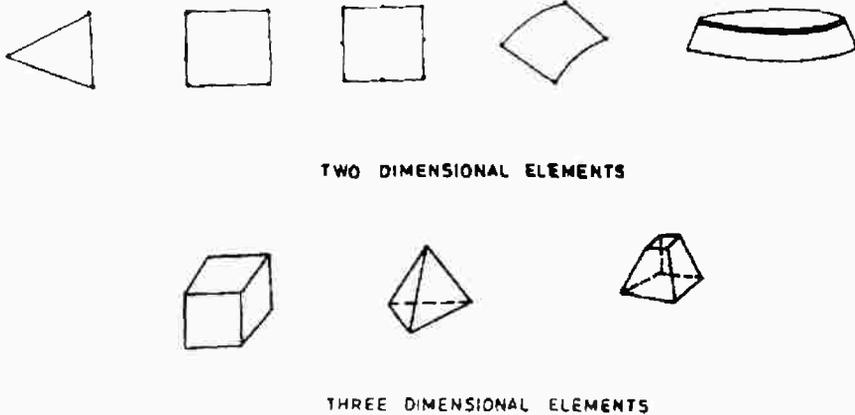


Figure 6.2

The solution of the finite element method is almost the same as the direct stiffness matrix method presented in Chapter 5. Once the elements' stiffness matrices are found, these matrices are augmented according to the compatibility and equilibrium conditions at every node. The free nodal displacements can be determined after specifying the boundary conditions at the boundary nodes. However, what interests the analyst in two-dimensional and three-dimensional structures is the stresses and strains not forces and displacements. Therefore, it is necessary to relate the strains at a point within the element with the nodal displacements.

### 6.2.1 The Relationship Between Strains and Nodal Displacements

The displacements  $\underline{d}$  at any point of coordinates  $(x,y)$  in a plane element can be related to the nodal displacement  $\underline{D}_c$  by

$$\underline{d} = \underline{N} \underline{D}_c \quad (6.1)$$

where the elements of matrix  $\underline{N}$  are function of the location of the point  $(x,y)$ .

An easy approach to determine matrix  $\underline{N}$  is to express  $\underline{d}$  in terms of some displacement functions  $\underline{P}$  and weighting parameters  $\underline{\alpha}$ , as follows:

$$\underline{d} = \underline{P} \underline{\alpha} \quad (6.2)$$

The elements of  $\underline{P}$  differ from one finite element to another. The dimension of the weighting parameters  $\underline{\alpha}$  is preferably equal the number of the nodal displacements of the finite element

Equation 6.2 can be applied at every node in the element to obtain

$$\begin{bmatrix} D_{c1} \\ \vdots \\ D_{ci} \\ \vdots \\ D_{cn} \end{bmatrix}_k = \begin{bmatrix} P_1^T \\ \vdots \\ P_i^T \\ \vdots \\ P_n^T \end{bmatrix}_k \underline{\alpha}_k = \underline{C}_k \underline{\alpha}_k \quad (6.3)$$

which indicates that the nodal displacements  $\underline{D}_c$  for the finite element number  $k$ , which have nodes,  $1, \dots, i, \dots, n$ , are related to the parameters  $\underline{\alpha}_k$  by the matrix  $\underline{C}_k$ , whose elements depend on the locations of the nodes  $1, \dots, i, \dots, n$ , in the global coordinates. For proper choice of global coordinates and the elements, one can relate  $\underline{d}$  to  $\underline{D}_c$  for any element using Equations 6.2 to 6.3 as follows:

$$\underline{\alpha}_k = \underline{C}_k^{-1} \underline{D}_{ck} \quad (6.4)$$

$$\underline{d} = \underline{P} \underline{C}^{-1} \underline{D}_c \quad (6.5)$$

Thus  $\underline{N}$  for any element is obtained from

$$\underline{N} = \underline{P} \underline{C}^{-1} \quad (6.6)$$

The inverse of matrix  $\underline{C}$  exists when choosing appropriate displacement functions for each specific element. For the present introduction we shall deal only with plate elements

### Example 6.1

Show how to determine  $\underline{N}$  for the triangular membrane element shown in Figure 6.3.

#### Solution

Any point of coordinates  $(x, y)$  within the element is subjected to the displacement  $u$  in the  $x$ -direction and displacement  $v$  in the  $y$ -direction of the global coordinates. Therefore, the nodal displacements at  $i, j$ , and  $k$  are given by

$$\underline{D}_c^T = \begin{bmatrix} u_i & v_i & u_j & v_j & u_k & v_k \end{bmatrix}$$

The weighting parameters  $\underline{\alpha}$  are chosen to be  $6 \times 1$  as follows:

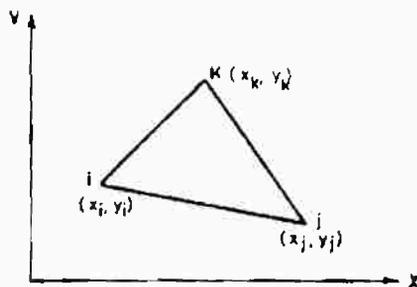


Figure 6.3

$$\underline{\alpha}_e^T = [\alpha_1 \quad \alpha_2 \quad \alpha_3 \quad \alpha_4 \quad \alpha_5 \quad \alpha_6]$$

The displacement functions which relate  $\underline{d}$  to  $\underline{\alpha}$  are chosen to be in the form

$$\underline{P} = \begin{bmatrix} 1 & x & y & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & x & y \end{bmatrix}$$

Substituting into Equation 6.3 one has

$$\begin{bmatrix} u_i \\ v_i \\ u_j \\ v_j \\ u_k \\ v_k \end{bmatrix} = \begin{bmatrix} 1 & x_i & y_i & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & x_i & y_i \\ 1 & x_j & y_j & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & x_j & y_j \\ 1 & x_k & y_k & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & x_k & y_k \end{bmatrix} \begin{bmatrix} \alpha_1 \\ \alpha_2 \\ \alpha_3 \\ \alpha_4 \\ \alpha_5 \\ \alpha_6 \end{bmatrix}$$

Thus, the matrix  $\underline{N}$  is determined from the following equation:

$$\underline{N} = \begin{bmatrix} 1 & x & y & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & x & y \end{bmatrix} = \begin{bmatrix} 1 & x_i & y_i & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & x_i & y_i \\ 1 & x_j & y_j & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & x_j & y_j \\ 1 & x_k & y_k & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & x_k & y_k \end{bmatrix}^{-1}$$

The relationships between strains and displacements can be obtained using Figure 6.4 which can be generalized into y-z and z-x planes as follows:

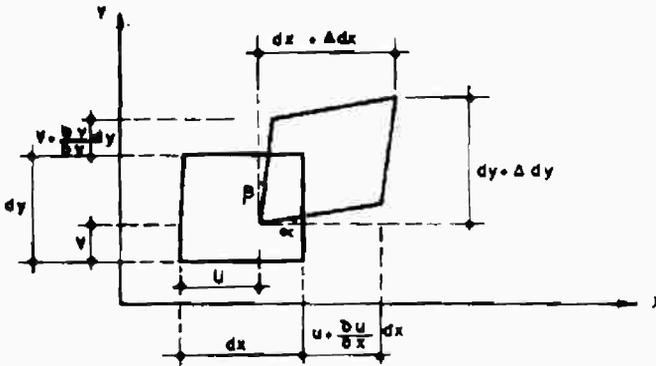


Figure 6.4

$$\begin{aligned}\epsilon_x &= \frac{\Delta dx}{dx} = \frac{u + \frac{\partial u}{\partial x} dx - u}{dx} = \frac{\partial u}{\partial x} \\ \epsilon_y &= \frac{\partial v}{\partial y} \\ \epsilon_z &= \frac{\partial w}{\partial z} \\ \gamma_{xy} = \gamma_{yx} &= \frac{\partial u}{\partial y} + \frac{\partial v}{\partial x} \\ \gamma_{xz} = \gamma_{zx} &= \frac{\partial u}{\partial z} + \frac{\partial w}{\partial x} \\ \gamma_{yz} = \gamma_{zy} &= \frac{\partial v}{\partial z} + \frac{\partial w}{\partial y}\end{aligned}\tag{6.7}$$

where  $w$  is the displacement in  $z$ -direction.

Since the displacements  $\underline{d}$  are related to the nodal displacements  $\underline{D}_e$ , it is possible to relate the strains  $\underline{\epsilon}$  to the nodal displacements  $\underline{D}_e$ . Such a relationship is expressed in general by

$$\underline{\varepsilon} = \begin{bmatrix} \frac{\partial}{\partial x} & 0 & 0 \\ 0 & \frac{\partial}{\partial y} & 0 \\ 0 & 0 & \frac{\partial}{\partial x} \\ \frac{\partial}{\partial y} & \frac{\partial}{\partial x} & 0 \\ \frac{\partial}{\partial z} & 0 & \frac{\partial}{\partial x} \\ 0 & \frac{\partial}{\partial z} & \frac{\partial}{\partial y} \end{bmatrix} \underline{\mathbf{N}} \underline{\mathbf{D}}_c = \underline{\mathbf{B}} \underline{\mathbf{D}}_c \quad (6.8)$$

### Example 6.2

Show how to determine matrix  $\underline{\mathbf{B}}$  for the triangular membrane element considered in Example 6.1.

### Solution

The strains of interest in the membrane elements are  $\varepsilon_x$ ,  $\varepsilon_y$ , and  $\gamma_{xy}$ , since  $w = 0$ . One thus has

$$\begin{bmatrix} \varepsilon_x \\ \varepsilon_y \\ \gamma_{xy} \end{bmatrix} = \begin{bmatrix} \frac{\partial u}{\partial x} \\ \frac{\partial v}{\partial y} \\ \frac{\partial u}{\partial y} + \frac{\partial v}{\partial x} \end{bmatrix} = \begin{bmatrix} \frac{\partial}{\partial x} & 0 \\ 0 & \frac{\partial}{\partial y} \\ \frac{\partial}{\partial y} & \frac{\partial}{\partial x} \end{bmatrix} \begin{bmatrix} u \\ v \end{bmatrix}$$

But  $\underline{\mathbf{d}}$  is given by

$$\underline{\mathbf{d}} = \begin{bmatrix} u \\ v \end{bmatrix} = \underline{\mathbf{P}} \underline{\mathbf{C}}^{-1} \underline{\mathbf{D}}_c = \underline{\mathbf{N}} \underline{\mathbf{D}}_c$$

The strains  $\underline{\varepsilon}$  are thus obtained from

$$\begin{bmatrix} \varepsilon_x \\ \varepsilon_y \\ \gamma_{xy} \end{bmatrix} = \begin{bmatrix} 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 \\ 0 & 0 & 1 & 0 & 1 & 0 \end{bmatrix} \underline{\mathbf{C}}^{-1} \underline{\mathbf{D}}_c$$

The matrix  $\underline{\mathbf{B}}$ , is therefore, given by the following equation:

$$\mathbf{B} = \begin{bmatrix} 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 \\ 0 & 0 & 1 & 0 & 1 & 0 \end{bmatrix} = \begin{bmatrix} 1 & x_i & y_i & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & x_i & y_i \\ 1 & x_j & y_j & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & x_j & y_j \\ 1 & x_k & y_k & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & x_k & y_k \end{bmatrix}^{-1}$$

## 6.2.2 Stresses and Strains Relationships

For a general infinitesimal element  $dv = dx \, dy \, dz$ , the stresses corresponding to the strains of Equation 6.7 are given as

$$\underline{\sigma}^T = [\sigma_x \, \sigma_y \, \sigma_z \, \tau_{xy} \, \tau_{yz} \, \tau_{zx}] \quad (6.9)$$

where  $\sigma_x, \sigma_y$  and  $\sigma_z$  indicate normal stresses and  $\tau_{xy}, \tau_{yz}$  and  $\tau_{zx}$  indicate shear stresses as shown in Figure 6.5. For the linear elastic materials of our interest, the stress-strain relationships are

$$\begin{aligned} \epsilon_x &= \frac{1}{E} (\sigma_x - \nu\sigma_y - \nu\sigma_z) \\ \epsilon_y &= \frac{1}{E} (\sigma_y - \nu\sigma_x - \nu\sigma_z) \\ \epsilon_z &= \frac{1}{E} (\sigma_z - \nu\sigma_x - \nu\sigma_y) \\ \gamma_{xy} &= \frac{\tau_{xy}}{G} \\ \gamma_{yz} &= \frac{\tau_{yz}}{G} \\ \gamma_{zx} &= \frac{\tau_{zx}}{G} \end{aligned} \quad (6.10)$$

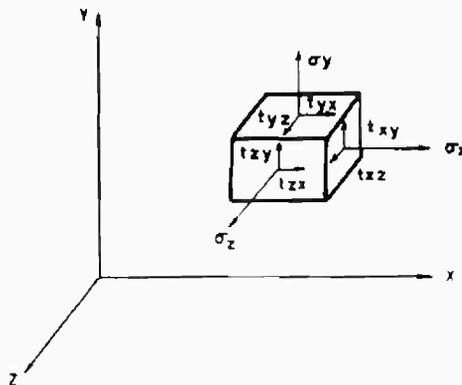


Figure 6.5

where  $E$  is the modulus of elasticity;  $G$  is the shearing modulus; and  $\nu$  is the Poisson's ratio. The shearing modulus is related to the modulus of elasticity by

$$G = \frac{E}{2(1+\nu)} \quad (6.11)$$

Expressing the stresses  $\underline{\sigma}$  in terms of strains  $\underline{\epsilon}$  one has, in a general expression, the following equation:

$$\underline{\sigma} = \underline{K}(\underline{\epsilon} - \underline{\epsilon}_0) + \underline{\sigma}_0 \quad (6.12)$$

in which  $\underline{\epsilon}_0$  represents initial strains,  $\underline{\sigma}_0$  represents initial stresses, and  $\underline{K}$  is given by

$$\underline{K} = \frac{E(1-\nu)}{(1+\nu)(1-2\nu)} \begin{bmatrix} 1 & \frac{\nu}{1-\nu} & \frac{\nu}{1-\nu} & 0 & 0 & 0 \\ \frac{\nu}{1-\nu} & 1 & \frac{\nu}{1-\nu} & 0 & 0 & 0 \\ \frac{\nu}{1-\nu} & \frac{\nu}{1-\nu} & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & \frac{1-2\nu}{2(1-\nu)} & 0 & 0 \\ 0 & 0 & 0 & 0 & \frac{1-2\nu}{2(1-\nu)} & 0 \\ 0 & 0 & 0 & 0 & 0 & \frac{1-2\nu}{2(1-\nu)} \end{bmatrix} \quad (6.13)$$

### 6.2.3 Plane-Stress and Plane-Strain for Isotropic Materials

If the element under consideration is in  $x$ - $y$  plane and subjected to plane-stresses or plane-strains, the stresses and strains in this case are

$$\underline{\sigma}^T = [\sigma_x \quad \sigma_y \quad \tau_{xy}] \quad (6.14)$$

$$\underline{\epsilon}^T = [\epsilon_x \quad \epsilon_y \quad \tau_{xy}] \quad (6.15)$$

In case of plane stresses, the element is subjected to  $\sigma_z = 0$ . In this case, the stress-strain relationship is obtained from Equation 6.10 as follows:

$$\begin{bmatrix} \sigma_x \\ \sigma_y \\ \tau_{xy} \end{bmatrix} = \frac{E}{1-\nu^2} \begin{bmatrix} 1 & \nu & 0 \\ \nu & 1 & 0 \\ 0 & 0 & \frac{1-\nu}{2} \end{bmatrix} \begin{bmatrix} \epsilon_x \\ \epsilon_y \\ \tau_{xy} \end{bmatrix} \quad (6.16)$$

If the element is also subjected to a change in temperature  $T$ , the initial strains become

$$\underline{\epsilon}_0^T = [\alpha T \quad \alpha T \quad 0] \quad (6.17)$$

where  $\alpha$  is the coefficient of thermal expansion.

In case of plane strains, the element strain  $\epsilon_z$  is zero but  $\sigma_z \neq 0$ . In this case, the stress-strain relationship is given by

$$\begin{bmatrix} \sigma_x \\ \sigma_y \\ \tau_{xy} \end{bmatrix} = \frac{E(1-\nu)}{(1+\nu)(1-2\nu)} \begin{bmatrix} 1 & \frac{\nu}{1-\nu} & 0 \\ \frac{\nu}{1-\nu} & 1 & 0 \\ 0 & 0 & \frac{1-2\nu}{2(1-\nu)} \end{bmatrix} \begin{bmatrix} \epsilon_x \\ \epsilon_y \\ \gamma_{xy} \end{bmatrix} \quad (6.18)$$

If the plain strains element is subjected to a change in temperature  $T$ , the initial strains become

$$\underline{\epsilon}_0^T = [(1+\nu)\alpha T \quad (1+\nu)\alpha T \quad 0] \quad (6.19)$$

#### 6.2.4 Element Stiffness Matrix

In order to determine the stiffness matrix of any element, the principle of virtual work is applied. This principle, as presented in Chapter 2, states that the work done due to a virtual displacement is equal to the strain energy due to this virtual displacement. This can be expressed as

$$\delta \underline{D}_e^T \underline{A}_e = \int_{\text{vol.}} \delta \underline{\epsilon}^T \underline{\sigma} \, d(\text{vol}) \quad (6.20)$$

where  $\underline{A}_e$  is the actions applied at the nodes of the element. Substituting Equations 6.8 and 6.12 into Equation 6.20, one has

$$\delta \underline{D}_e^T \underline{A}_e = \int_{\text{vol.}} \delta \underline{D}_e^T \underline{B}^T [\underline{K}(\underline{\epsilon} - \underline{\epsilon}_0) + \underline{\sigma}_0] \, d(\text{vol}) \quad (6.21)$$

Equation 6.21 can be written as

$$\underline{A}_e = \left[ \int_{\text{vol.}} \underline{B}^T \underline{K} \underline{B} \, d(\text{vol}) \right] \underline{D}_e - \int_{\text{vol.}} \underline{B}^T \underline{K} \underline{\epsilon}_0 \, d(\text{vol}) + \int_{\text{vol.}} \underline{B}^T \underline{\sigma}_0 \, d(\text{vol}) \quad (6.22)$$

It is obvious that the equivalent nodal actions due to initial strains and initial stresses are, respectively, given by

$$\underline{A}_{c\epsilon_0} = + \int_{\text{vol.}} \underline{B}^T \underline{K} \underline{\epsilon}_0 d(\text{vol}) \quad (6.23)$$

$$\underline{A}_{c\sigma_0} = - \int_{\text{vol.}} \underline{B}^T \underline{\sigma}_0 d(\text{vol}) \quad (6.24)$$

The relationship between nodal actions and nodal displacements is, in general,

$$\underline{A}_c = \left[ \int_{\text{vol.}} \underline{B}^T \underline{K} \underline{B} d(\text{vol}) \right] \underline{D}_c \quad (6.25)$$

From which it is obvious that the element stiffness matrix can be obtained from

$$\underline{S} = \int_{\text{vol.}} \underline{B}^T \underline{K} \underline{B} d(\text{vol}) \quad (6.26)$$

### 6.2.5 Equivalent Nodal Actions

Equations 6.23 and 6.24 gave, respectively, the equivalent nodal actions due to initial strains and initial stresses. In this section, the nodal actions due to distributed forces will be found. In continuum structures, the forces could be distributed within the body of the structure or on its surface. We shall indicate the body forces by  $\underline{g}$  kN/m<sup>3</sup> and the surface forces by  $\underline{q}$  kN/m<sup>2</sup>. The work done by these forces, due to virtual nodal displacements  $\delta \underline{D}_c$  in an element, is given by

$$W = \int_{\text{vol.}} \delta \underline{d}^T \underline{g} d(\text{vol}) + \int_{\text{surface}} \delta \underline{d}^T \underline{q} d(\text{area}) \quad (6.27)$$

Substituting Equation 6.5 into Equation 6.27 one has

$$W = \int_{\text{vol.}} \delta \underline{D}_c^T \underline{N}^T \underline{g} d(\text{vol}) + \int_{\text{surface}} \delta \underline{D}_c^T \underline{N}^T \underline{q} d(\text{area}) \quad (6.28)$$

Equating Equation 6.28 with the strain energy due to virtual displacements, one realizes that the equivalent nodal forces due to body and surface forces are, respectively, given by

$$\underline{A}_{c \text{ body}} = \int_{\text{vol.}} \underline{N}^T \underline{g} d(\text{vol}) \quad (6.29)$$

$$\underline{A}_{c \text{ surface}} = \int_{\text{surface}} \underline{N}^T \underline{q} d(\text{area}) \quad (6.30)$$

### 6.2.6 Example 6.3

Analyze the plate shown in Figure 6.6, considering plane stresses,  $E = 10^7 \text{ N.cm}^2$  and  $\nu = 0$ .

#### Solution

For clear illustration, the plate is divided into only two triangular elements as shown in Figure 6.7. Element 1 has nodes number 1, 3 and 4. Element 2 has nodes number 1, 2 and 4. The two elements are joined at nodes 1 and 4.

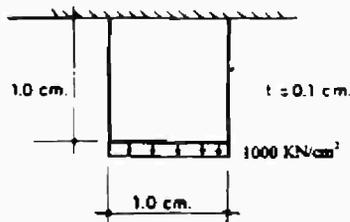


Figure 6.6

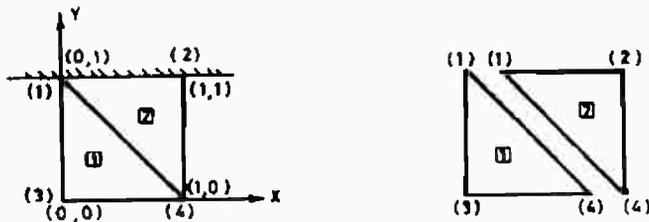


Figure 6.7

According to the coordinates of the nodes with respect to global x-y axes shown in Figure 6.7, the matrices  $\underline{C}_1$  and  $\underline{C}_2$  are determined as

$$\underline{C}_1 = \begin{bmatrix} 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 \\ 1 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 1 & 0 \\ 1 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 1 \end{bmatrix} \begin{array}{l} \text{node 3} \\ \text{node 4} \\ \text{node 1} \end{array}$$

$$\underline{C}_2 = \begin{bmatrix} 1 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 1 & 0 \\ 1 & 1 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 1 & 1 \\ 1 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 1 \end{bmatrix} \begin{array}{l} \text{) node 4} \\ \text{) node 2} \\ \text{) node 1} \end{array}$$

The matrices  $\underline{B}_1$  and  $\underline{B}_2$  are, respectively, obtained as

$$\underline{B} = \begin{bmatrix} 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 \\ 0 & 0 & 1 & 0 & 1 & 0 \end{bmatrix} \underline{C}^{-1}$$

$$\underline{B}_1 = \begin{bmatrix} -1 & 0 & 1 & 0 & 0 & 0 \\ 0 & -1 & 0 & 0 & 0 & 1 \\ -1 & -1 & 0 & 1 & 1 & 0 \end{bmatrix} ; \quad \underline{B}_2 = \begin{bmatrix} 0 & 0 & 1 & 0 & -1 & 0 \\ 0 & -1 & 0 & 1 & 0 & 0 \\ -1 & 0 & 1 & 1 & 0 & -1 \end{bmatrix}$$

The stress-strain relationship for the plane stresses problem with  $\nu = 0.0$  is thus

$$\underline{K} = \frac{E}{1-\nu^2} \begin{bmatrix} 1 & \nu & 0 \\ \nu & 1 & 0 \\ 0 & 0 & \frac{1-\nu}{2} \end{bmatrix} = E \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 0.5 \end{bmatrix}$$

The elements' stiffness matrices are determined from

$$\underline{S}_j = \int \underline{B}_j^T \underline{K} \underline{B}_j d(\text{vol})$$

$$= \frac{E}{40} \begin{bmatrix} \overbrace{\begin{matrix} \text{node 3} \\ 3 & 1 \\ 1 & 3 \end{matrix}} & \overbrace{\begin{matrix} \text{node 4} \\ -2 & -1 \\ 0 & -1 \end{matrix}} & \overbrace{\begin{matrix} \text{node 1} \\ -1 & 0 \\ -1 & 0 \end{matrix}} \\ -2 & 0 & 2 & 0 & 0 & 0 \\ -1 & -1 & 0 & 1 & 1 & 0 \\ -1 & -1 & 0 & 1 & 1 & 0 \\ 0 & -2 & 0 & 0 & 0 & 2 \end{bmatrix} \begin{array}{l} \text{) node 3} \\ \text{) node 4} \\ \text{) node 1} \end{array}$$

$$\underline{S}_2 = \int \underline{B}_2^T \underline{K} \underline{B}_2 d(\text{vol})$$

$$= \frac{E}{40} \begin{bmatrix} \overbrace{1 \ 0}^{\text{node 4}} & \overbrace{-1 \ -1}^{\text{node 2}} & \overbrace{0 \ 1}^{\text{node 1}} \\ 0 \ 2 & 0 \ -2 & 0 \ 0 \\ -1 \ 0 & 3 \ 1 & -2 \ -1 \\ -1 \ -2 & 1 \ 3 & 0 \ -1 \\ 0 \ 0 & -2 \ 0 & 2 \ 0 \\ 1 \ 0 & -1 \ -1 & 0 \ 1 \end{bmatrix} \begin{matrix} \text{node 4} \\ \text{node 2} \\ \text{node 1} \end{matrix}$$

The structure stiffness matrix is obtained by superposition to have

$$\underline{S} = \frac{E}{40} \begin{bmatrix} \overbrace{3 \ 0}^{\text{node 1}} & \overbrace{-2 \ 0}^{\text{node 2}} & \overbrace{-1 \ -1}^{\text{node 3}} & \overbrace{0 \ 1}^{\text{node 4}} \\ 0 \ 3 & -1 \ -1 & 0 \ -2 & 1 \ 0 \\ -2 \ -1 & 3 \ 1 & 0 \ 0 & -1 \ 0 \\ 0 \ -1 & 1 \ 3 & 0 \ 0 & -1 \ -2 \\ -1 \ 0 & 0 \ 0 & 3 \ 1 & -2 \ -1 \\ -1 \ -2 & 0 \ 0 & 1 \ 3 & 0 \ -1 \\ 0 \ 1 & -1 \ -1 & -2 \ 0 & 3 \ 0 \\ 1 \ 0 & 0 \ -2 & -1 \ -1 & 0 \ 3 \end{bmatrix} \begin{matrix} \text{node 1} \\ \text{node 2} \\ \text{node 3} \\ \text{node 4} \end{matrix}$$

The equivalent nodal forces are determined from

$$\underline{A}_{e1}^T = t \begin{bmatrix} \overbrace{0 \ -500}^{\text{node 3}} & \overbrace{0 \ -500}^{\text{node 4}} & \overbrace{0 \ 0}^{\text{node 1}} \end{bmatrix}$$

The boundary conditions are  $\underline{D}_{c1} = \underline{D}_{c2} = 0$ . Therefore, the final stiffness relationship is

$$\begin{bmatrix} 0 \\ -500 \\ 0 \\ -500 \end{bmatrix} = \frac{E}{40} \begin{bmatrix} 3 & 1 & -2 & -1 \\ 1 & 3 & 0 & -1 \\ -2 & 0 & 3 & 0 \\ -1 & -1 & 0 & 3 \end{bmatrix} \begin{bmatrix} u_3 \\ v_3 \\ u_4 \\ v_4 \end{bmatrix}$$

The solution is obtained as

$$\begin{bmatrix} \mathbf{D}_{e3}^T & \mathbf{D}_{e4}^T \end{bmatrix} = 10^{-4} [0 \quad -1 \quad 0 \quad -1] \text{ cm}$$

Now, the stresses at any point within any element can be determined as follows:

$$\underline{\sigma} = \underline{\mathbf{K}} \underline{\varepsilon} = \underline{\mathbf{K}} \underline{\mathbf{B}} \underline{\mathbf{D}}_e$$

$$\underline{\sigma}_1 = \underline{\mathbf{K}} \underline{\mathbf{B}}_1 [\underline{\mathbf{D}}_e]_1 = [0 \quad 1000 \quad 0]$$

$$\underline{\sigma}_2 = \underline{\mathbf{K}} \underline{\mathbf{B}}_2 [\underline{\mathbf{D}}_e]_2 = [0 \quad 1000 \quad 0]$$

$$\text{where } [\underline{\mathbf{D}}_e]_1^T = 10^{-4} [0 \quad -1 \quad 0 \quad -1 \quad 0 \quad 0]$$

$$[\underline{\mathbf{D}}_e]_2^T = 10^{-4} [0 \quad -1 \quad 0 \quad 0 \quad 0 \quad 0]$$

The results indicate that the elements are subjected to tensile stress  $\sigma_y = 1000 \text{ kN/cm}^2$ .

### 6.2.7 Displacement Functions of Some Membrane Elements

It was pointed out, in the previous sections, that the displacement functions for a triangular membrane element are given by

$$\underline{\mathbf{P}} = \begin{bmatrix} 1 & x & y & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & x & y \end{bmatrix} \quad (6.31)$$

where the weighting parameters  $\underline{\alpha}$  are chosen to be 6 parameters. Another element used for membrane structures is shown in Figure 6.8. The triangle in this case has six nodes. The weighting parameters  $\underline{\alpha}$  are thus chosen to be 12 parameters. The displacement functions in this case are chosen as follows:

$$\underline{\mathbf{P}} = \begin{bmatrix} 1 & x & y & x^2 & xy & y^2 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 1 & x & y & x^2 & xy & y^2 \end{bmatrix} \quad (6.32)$$

One also may use a rectangular element with four nodes as shown in Figure 6.9. The displacement functions in this case could be bilinear as

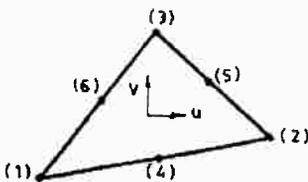


Figure 6.8




Figure 6.9

$$\underline{P} = \begin{bmatrix} 1 & x & y & xy & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & x & y & xy \end{bmatrix} \quad (6.33)$$

If the rectangular element has 8 nodes as shown in Figure 6.10, the displacement functions in this case could be chosen as

$$\underline{P} = \begin{bmatrix} 1 & x & y & xy & y^2 & xy^2 & y^3 & xy^3 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & x & y & xy & x^2 & x^2y & x^3 & x^3y \end{bmatrix} \quad (6.34)$$

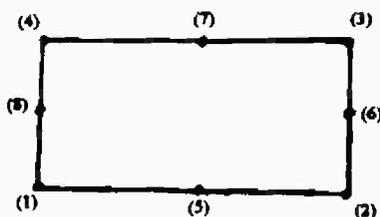


Figure 6.10

### 6.2.8 Stiffness Matrix of Rectangular Plate Bending Element

The displacements of interest at any node of the rectangular plate element shown in Figure 6.11 are given by

$$\underline{D}_{ci}^T = \begin{bmatrix} w_i & \theta_{x_i} & -\theta_{y_i} \end{bmatrix} = \begin{bmatrix} w_i & \frac{\partial w_i}{\partial y} & \frac{\partial w_i}{\partial x} \end{bmatrix} \quad (6.35)$$

The nodal displacements of the element are thus

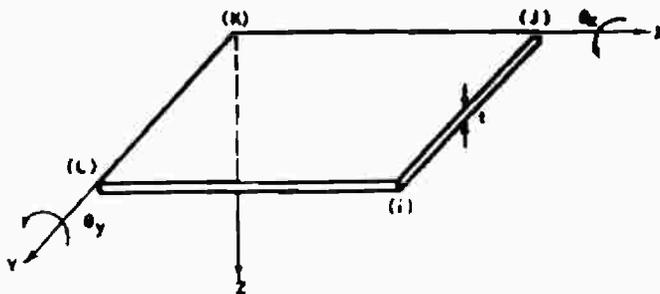


Figure 6.11

$$\underline{\mathbf{D}}_c^T = \left[ \underline{\mathbf{D}}_{ci}^T \quad \underline{\mathbf{D}}_{cj}^T \quad \underline{\mathbf{D}}_{ck}^T \quad \underline{\mathbf{D}}_{cl}^T \right]_{12 \times 1} \quad (6.36)$$

The strains at any point  $(x, y)$  within the element consist of the curvatures and are given by

$$\underline{\boldsymbol{\epsilon}}^T = \left[ \frac{-\partial^2 w}{\partial x^2} \quad \frac{-\partial^2 w}{\partial y^2} \quad \frac{-2\partial^2 w}{\partial x \partial y} \right] \quad (6.37)$$

The corresponding stresses represent the bending and twisting moments. They are expressed as

$$\underline{\boldsymbol{\sigma}}^T = \mathbf{D} \left[ - \left( \frac{\partial^2 w}{\partial x^2} + \nu \frac{\partial^2 w}{\partial y^2} \right) \quad - \left( \frac{\partial^2 w}{\partial y^2} + \nu \frac{\partial^2 w}{\partial x^2} \right) \quad (-1 + \nu) \frac{\partial^2 w}{\partial x \partial y} \right] \quad (6.38)$$

where

$$\mathbf{D} = \frac{E t^3}{12(1 - \nu^2)} \quad (6.39)$$

Thus, by using Equation 6.37, one can write Equation 6.38 as follows:

$$\underline{\boldsymbol{\sigma}} = \mathbf{D} \begin{bmatrix} 1 & \nu & 0 \\ \nu & 1 & 0 \\ 0 & 0 & \frac{1-\nu}{2} \end{bmatrix} \underline{\boldsymbol{\epsilon}} \quad (6.40)$$

The displacement function is taken as follows:

$$\mathbf{P} = \left[ 1 \quad x \quad y \quad x^2 \quad xy \quad y^2 \quad x^3 \quad x^2y \quad xy^2 \quad y^3 \quad x^3y \quad xy^3 \right] \quad (6.41)$$

where the deflection  $\underline{\mathbf{w}}$  is expressed as

$$\underline{\mathbf{w}} = \mathbf{P} \underline{\boldsymbol{\alpha}} \quad (6.42)$$

Now, substituting Equation 6.42 into Equation 6.35 and 6.36 one obtains  $\underline{\mathbf{C}}$ . The displacements at any node  $i$  are, for example,

$$\underline{\mathbf{D}}_{ei} = \left[ \begin{array}{cccccccccccc} 1 & x & y & x^2 & xy & y^2 & x^3 & x^2y & xy^2 & y^3 & x^3y & xy^3 \\ 0 & 0 & 1 & 0 & x & 2y & 0 & x^2 & 2xy & 3y^2 & x^3 & 3xy^2 \\ 0 & 1 & 0 & 2x & y & 0 & 3x^2 & 2xy & y^2 & 0 & 3x^2y & y^3 \end{array} \right] \underline{\boldsymbol{\alpha}} \quad (6.43)$$

in which  $x$  and  $y$  are coordinates of joint  $i$  which are substituted by  $x_i$  and  $y_i$ .

The relation between  $\underline{\epsilon}$  and  $\underline{D}_c$  is obtained from Equation 6.37 and 6.41 as follows:

$$\underline{\epsilon} = \begin{bmatrix} 0 & 0 & 0 & -2 & 0 & 0 & -6x & -2y & 0 & 0 & -6xy & 0 \\ 0 & 0 & 0 & 0 & 0 & -2 & 0 & 0 & -2x & -6y & 0 & -6xy \\ 0 & 0 & 0 & 0 & 2 & 0 & 0 & 4x & 4y & 0 & 6x & 6y \end{bmatrix} \underline{\alpha} \quad (6.44)$$

Matrix  $\underline{B}$  is obtained from the inverse of matrix  $\underline{C}$  and Equation 6.44, as follows:

$$\underline{B} = \begin{bmatrix} 0 & 0 & 0 & -2 & 0 & 0 & -6x & -2y & 0 & 0 & -6xy & 0 \\ 0 & 0 & 0 & 0 & 0 & -2 & 0 & 0 & -2x & -6y & 0 & -6xy \\ 0 & 0 & 0 & 0 & 2 & 0 & 0 & 4x & 4y & 0 & 6x & 6y \end{bmatrix} \underline{C}^{-1} \quad (6.45)$$

The element stiffness matrix can then be determined from Equation 6.26.

### 6.2.9 Elements for General Solids

The stress-strain relationships for general solids has been given in Equations 6.10 – 6.13. In this section, the displacement functions of some popular solid elements are given.

#### Tetrahedra with Constant Strain

The element in this case has four nodes as shown in Figure 6.12. The displacements at any point  $(x, y, z)$  are

$$\underline{d}^T = [u \quad v \quad w] \quad (6.46)$$

The displacement function in this case is

$$\underline{P} = \begin{bmatrix} 1 & x & y & z & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & x & y & z & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & x & y & z \end{bmatrix} \quad (6.47)$$

#### Tetrahedra with Linear Strain

The number of nodes in each element is 10, as shown in Figure 6.13. The displacement function is

$$\underline{P} = \begin{bmatrix} 1 & x & y & z & xy & yz & zx & x^2 & y^2 & z^2 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & \boxed{\text{similar}} & \dots \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & \dots & \boxed{\text{similar}} \end{bmatrix} \quad (6.48)$$

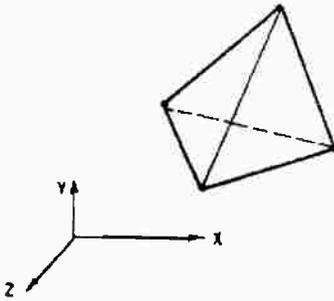


Figure 6.12

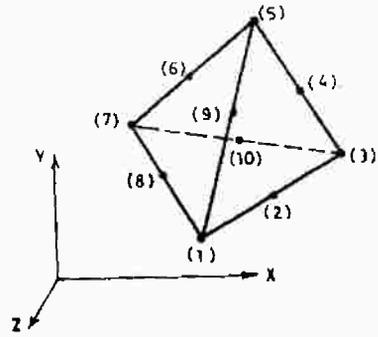


Figure 6.13

which has a dimension of  $3 \times 30$ .

### Rectangular Solid

The number of nodes in this case is 8 as shown in Figure 6.14. The displacement function is trilinear and given by

$$\underline{\mathbf{P}} = \begin{bmatrix} 1 & x & y & z & xy & yz & zx & xyz & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & \boxed{\text{similar}} & \dots \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & \dots & \boxed{\text{similar}} \end{bmatrix} \quad (6.49)$$

which has a dimension of  $3 \times 24$ .

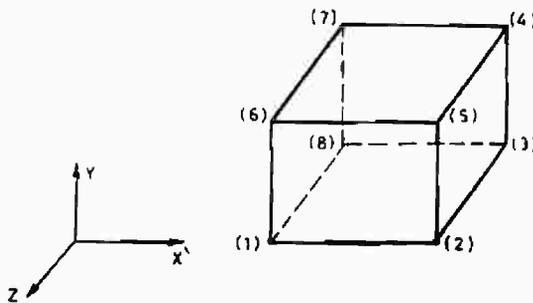


Figure 6.14

## 6.3 INFLUENCE LINES

### 6.3.1 Introduction

In the design of a structural element, the designer looks for the greatest stresses applied on the element in order to provide sufficient strength to withstand the maximum stresses. Structures subjected to static or stationary loading are easy to design since the critical section can be found directly from the internal action diagrams. However, for structures subjected to moving loads, as in bridges, it is necessary to investigate the positions of the moving loads which result in maximum stresses. Moreover, the positions of the moving loads which cause maximum normal stresses could be different from those which cause maximum shearing stresses. Instead of solving such problems by rigorous analysis considering all possible moving loads positions, the problem can greatly be simplified by studying a unit moving load. The variation of a specific internal action at a certain section can be plotted according to the position of the unit load. From these diagrams, which are called influence lines, one can determine the position of the moving loads which cause maximum stresses at a specific section.

### 6.3.2 Definition

The influence line is a diagram, its ordinate at any point along the structure, gives the magnitude of a specific force function due to a unit load at that point.

For example, the influence line of the reaction  $R_a$  of a simple beam is shown in Figure 6.15. The ordinate at any point along this diagram gives the reaction  $R_a$  when a unit load is applied at that point. For statically determinate structures, it is very easy to construct the influence lines, as will be illustrated by some numerical examples. However, the construction of influence lines for statically indeterminate structures is more involved.

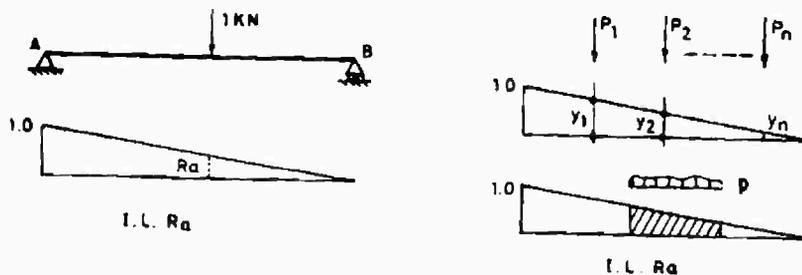


Figure 6.15

The process of determining the maximum internal action caused by the moving loads comes after the construction of the influence lines. If a set of

concentrated loads is moving along the beam as shown in Figure 6.15, then for a selected position, the reaction at A is obtained from

$$R_a = P_1 y_1 + P_2 y_2 + \dots + P_n y_n \quad (6.50)$$

On the other hand, if the moving load is distributed as shown in Figure 6.15, then the reaction for a certain load position would be

$$R_a = \int (P dx) y \quad (6.51)$$

For a uniformly distributed moving load, the reaction is the load intensity times the occupied area from the influence line.

### 6.3.3 Examples for Statically Determinate Structures

In this section, numerical examples on the construction of influence lines for statically determinate structures are given. These examples serve as bases for the next section.

#### Example 6.4

Determine the influence lines of the reactions at A, B, and C for the beam shown in Figure 6.16. From these influence lines, determine the influence lines of the shearing force and bending moment at the middle of span AB.

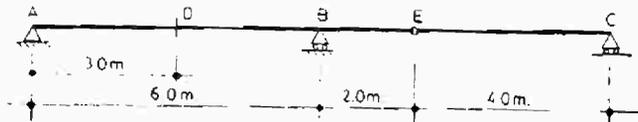


Figure 6.16

#### Solution

The influence lines of the reactions are determined by finding the reactions when a unit load takes various positions on the beam. If, for example, the unit load is located at A, the value of  $R_a$  is unity. If the unit load is located at B, the value of  $R_a$  is zero. If the unit load is positioned at E, the value of  $R_a$  is  $(-\frac{1}{3})$ . When the unit load is positioned at C, the value of  $R_a$  is zero. The influence lines of  $R_a$ ,  $R_b$ , and  $R_c$  are shown in Figure 6.17.

The construction of the influence lines for the reactions eases the determination of the influence lines for the internal actions. The shear force at section D equal to  $R_b$  if the unit load is moving between D and C, and equals to  $(-R_b)$  if the unit load is moving between A and D. Similarly, the moment at D equals to  $(3R_a)$  if the unit load is moving between D and C, and equals to  $(3R_b)$  if the load is moving

between A and D. The influence lines of  $A_y$  and  $M_z$  at section D are shown in Figure 6.18.

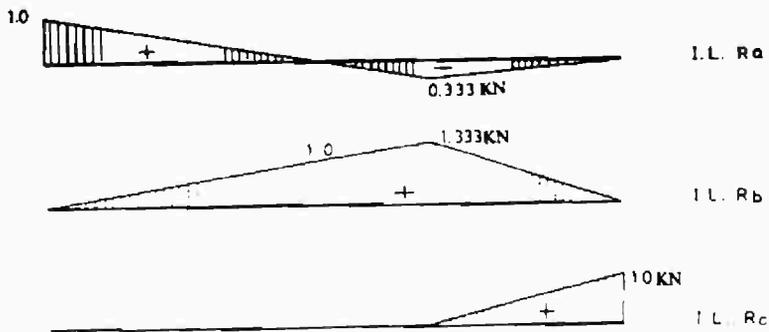


Figure 6.17

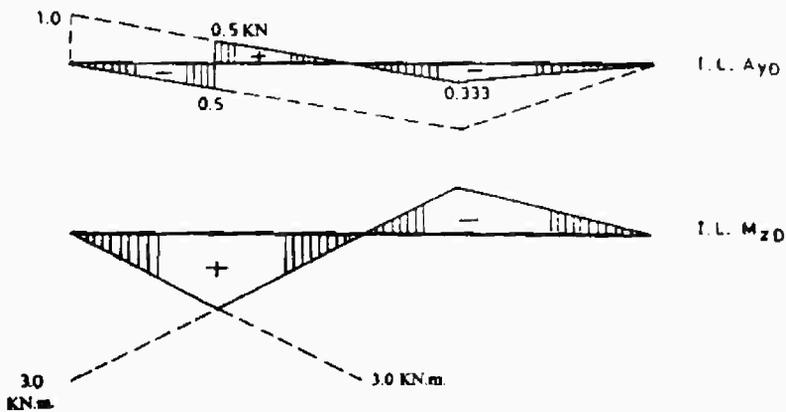


Figure 6.18

### Example 6.5

Determine the influence lines for the shear force and bending moment at section  $s$  for the simple span bridge shown in Figure 6.19.

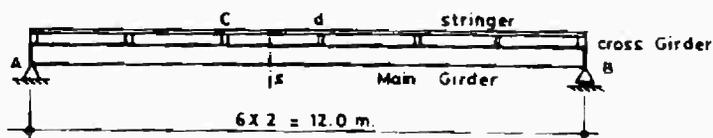


Figure 6.19

### Solution

This is a typical structural system for simple span bridges. The moving loads' effects are transmitted to the main girders through the stringers and cross girders. Therefore, the influence of the unit load on the main girder is only through these cross girders. The influence lines for shear force and bending moment are determined from the influence lines of the reactions at A and B.

When the unit load is moving between d and B,  $A_{yc} = 2R_a$ , and  $M_{zd} = 4R_a$ . When the unit load is moving between A and C,  $A_{yd} = R_b$ , and  $M_{zd} = 6R_b$ . The influence lines of  $A_{ys}$  and  $M_{zs}$  are as shown in Figure 6.20.

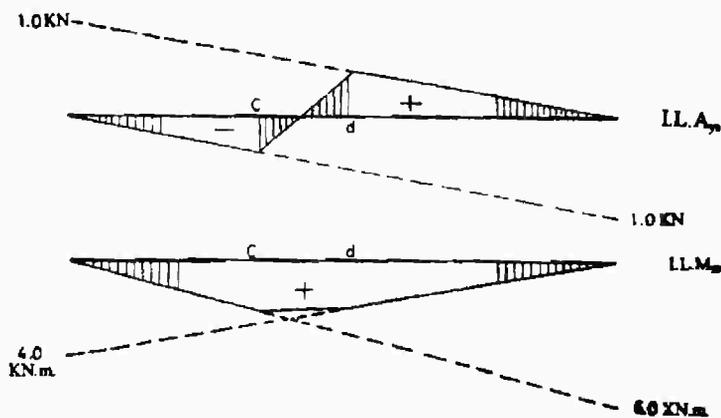


Figure 6.20

### Example 6.6

Determine the influence lines for members 1-2, 3-5, 4-6, and 3-6 for the plane truss shown in Figure 6.21.

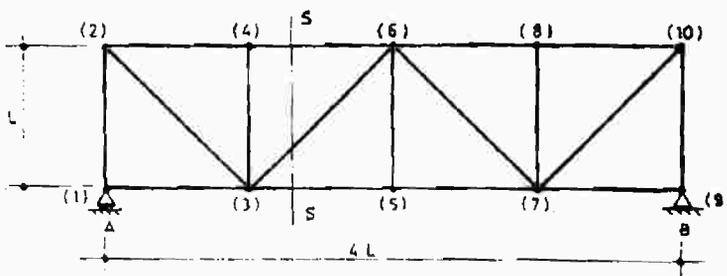


Figure 6.21

### Solution

The effect of the moving unit load is transmitted through the floor system to the truss joints. If the unit load is moving along the lower chord of the truss, then its effect is transmitted to joints 1, 3, 5, 7, and 9.

From the equilibrium of joint (1) it is obvious that the influence line of member 1-2 is the same as  $R_a$ . By studying the equilibrium of the part on the left hand side of section s-s, it is obvious that when the unit load is moving along the right side of joint s, one has

$$A'_{x3-5} = +2R_a \text{ (tension)}$$

$$A'_{x4-6} = -R_a \text{ (compression)}$$

$$A'_{x3-6} = -1.414 R_a \text{ (compression)}$$

If the unit load is moving towards the left side of joint 3, the forces in the members are

$$A'_{x3-5} = +2R_b \text{ (tension)}$$

$$A'_{x4-6} = -3R_b \text{ (compression)}$$

$$A'_{x3-6} = +1.414 R_b \text{ (compression)}$$

The influence lines can then be constructed as shown in Figure 6 22.

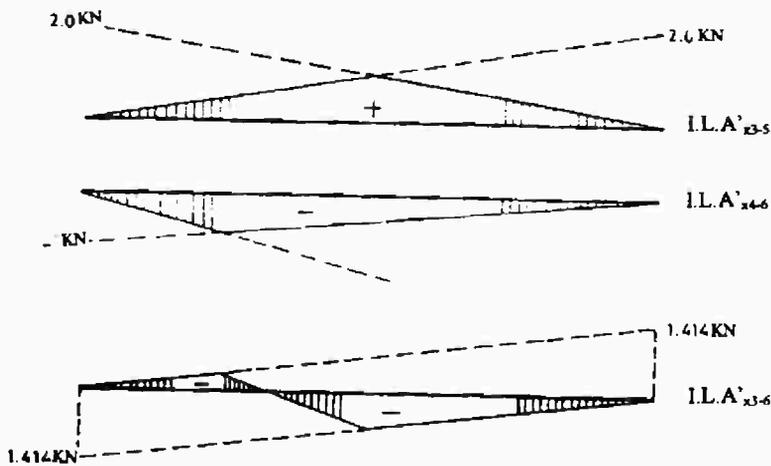


Figure 6 22

### 6.3.4 Examples for Statically Indeterminate Structures

It was shown in the previous section that the influence line of any internal action can easily be constructed after determining the influence lines of the reactions. A similar process is used for statically indeterminate structures, except that the reactions are usually statically indeterminate. In some other structures, internal members could be statically indeterminate. Therefore, one first has to determine the influence lines of the redundants in the statically indeterminate structures.

#### Example 6.7

Determine the influence lines of the reactions  $R_a$ ,  $R_b$  and  $R_c$  for the beam shown in Figure 6.23.

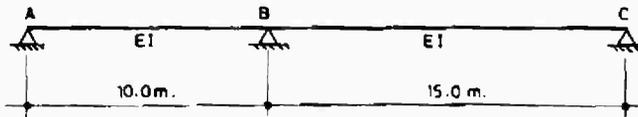


Figure 6.23

#### Solution

If  $R_a$  is considered as a redundant then the equation of consistent deformation in the force method is

$$\Delta_{10} + R_a f_{11} = 0 \quad ; \quad R_a = - \frac{\Delta_{10}}{f_{11}}$$

where  $\Delta_{10}$  is the deflection at A due to the unit load at position  $x$ , and  $f_{11}$  is the deflection at A due to the unit load at A. However, from the reciprocal theorem one has  $\Delta_{10}$  is the same as  $f_{x1}$ . Therefore, one only needs to place a unit load at A and calculate the deflections  $f_{x1}$  at various locations along the primary structure.

The deflection at various locations along the beam can be calculated by any suitable method. The conjugate beam method is perhaps the fastest method in this example. The calculated deflection is given in Figure 6.24. The influence line of  $R_a$  can now be determined by dividing all deflections by  $f_{11} = 833.333/EI$ .

In order to determine the influence lines of  $R_b$  and  $R_c$  one uses the equilibrium conditions. When  $R_b$  is written in terms of  $R_a$  one has

$$R_b = \frac{25-x}{15} - \frac{25}{15} R_a$$

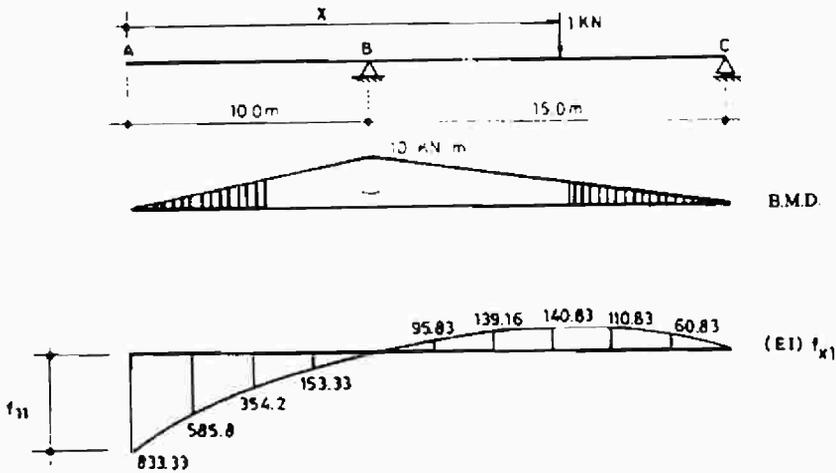


Figure 6.24

Similarly,  $R_c$  is obtained as

$$R_c = \frac{x - 10}{15} + \frac{10}{15} R_a$$

The influence lines of the reactions are shown in Figure 6.25.

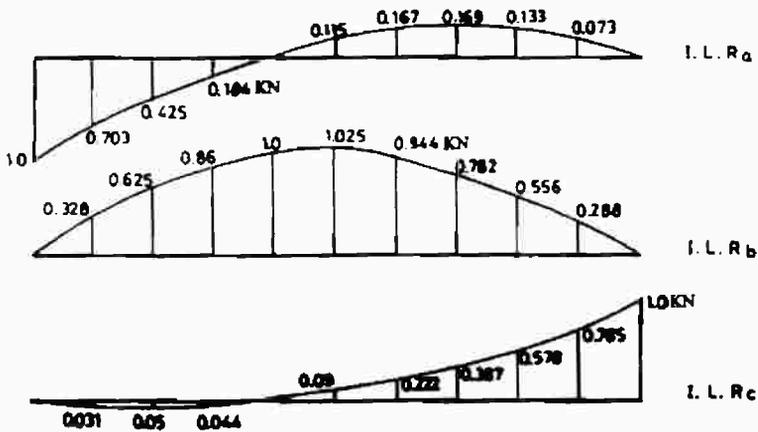


Figure 6.25

### Example 6.8

Determine the influence lines of  $R_b$  and the forces in members 3-5 and 5-6 in the truss shown in Figure 6.26 ( $EA = 252000$  kN for horizontal members, and  $EA = 126000$  kN for diagonal members).

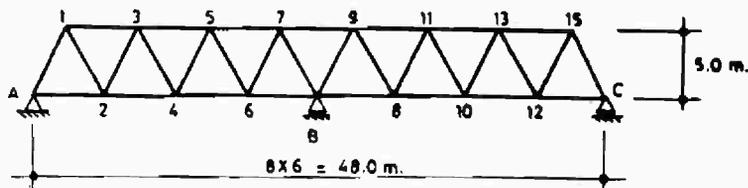


Figure 6.26

**Solution**

$$D.S.I. = m + r - 2j = 31 + 4 - 2(17) = 1$$

Select the reaction at B as the redundant. Calculating the deflection at the lower joints due to a unit load at B, the influence line of  $R_b$  can be constructed as shown in Figure 6.27.

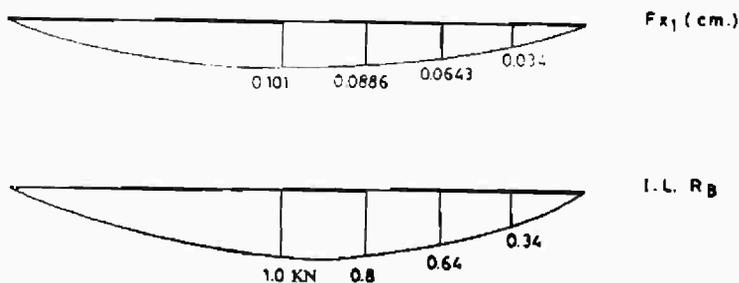


Figure 6.27

In order to determine the influence lines for the forces in members 3-5 and 5-6, one finds the value of these forces in terms of the reactions, as follows:

For member 3-5 one has

$$A'_{x_{3-5}} = -\frac{12}{5} R_a \quad (\text{if the load moves towards the right side of joint 4})$$

$$A'_{x_{3-5}} = -\frac{12}{5} R_b - \frac{36}{5} R_c \quad (\text{if the load moves towards the left of joint 4})$$

The relationships between  $R_a$ ,  $R_c$ , and  $R_b$  are

$$R_a = -\frac{48-x}{48} - \frac{R_b}{2} \quad \text{for } 0 \leq x \leq 48$$

$$R_c = -\frac{x}{48} - 2R_b \quad \text{for } 0 \leq x \leq 48$$

The influence lines of the members forces can thus be constructed as shown in Figure 6.28.

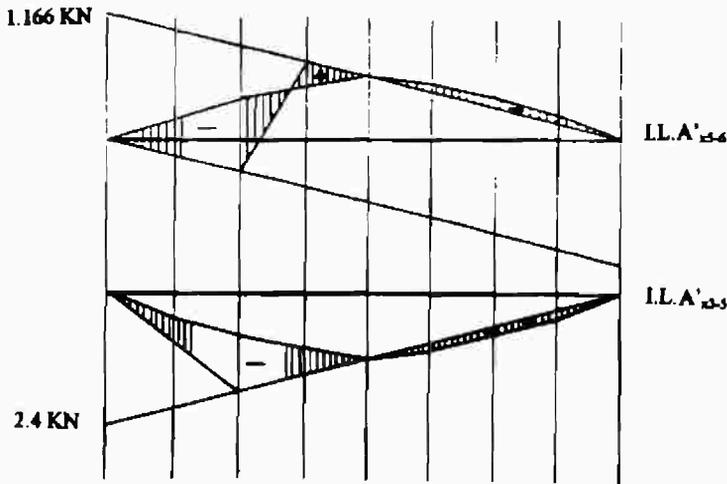


Figure 6.28

#### 6.4 STRUCTURAL ANALYSIS USING COMPUTER

The principles of matrix structural analysis presented in chapters 5 and 6 can easily be programmed for computer use. One has to be familiar with the programming language of communicating with the computer machine, the numerical techniques needed to program matrix operations like addition, subtraction, multiplication, inverse and the solution of linear simultaneous equations. At present, the substantial skills in software techniques have resulted in many professional structural analysis and/or design softwares able to solve complicated structural analysis problems using personal computers. Programs like STAAD-III/ISDS, SAP90, ETAB among many others are characterized by easy use. In these programs, the user introduces the data of geometry, members properties, boundary conditions, applied loading, and the type of analysis or design required. It became possible by these softwares to solve large scale problems for different cases of loading in very short times. Most of the structural analysis programs have also excellent graphic capabilities to enable the user to check out the input geometry and to provide plots of deformations, internal actions, and stresses contours in the structure.

In this section, some examples are solved using program STAAD-III/ISDS to show first the verification of the results which have previously been obtained manually. Secondly, to show the effect of the current practice in assuming the distribution of floors loading on the surrounding beams on the accuracy of the structural analysis of skeleton structures

### **Example 6.9**

This example is the same as example 5.14 of chapter 5. The geometry of the structure is shown by the computer plot of Figure 6.29. The input file is shown in Figure 6.30. The shear force and bending moment diagrams are given in the computer plots of Figures 6.31 and 6.32. It is obvious that the results are in close agreement with the results of example 5.14.

### **Example 6.10**

This example is the same as example 5.17. The inclined roller support can either be introduced as an inclined link as shown in Figure 6.33, or by rotating the structure such that the new x-axis coincide with the rolling plane as shown in Figure 6.34. The input files of both cases are shown in Figures 6.35 and 6.36, respectively. The shear force and bending moment diagrams of both cases are, respectively, given in Figures 6.37 and 6.38. The results are the same as obtained in example 5.17.

### **Example 6.11**

This example is the same as example 5.19. The geometry of the structure is shown in Figure 6.39. The input file is given in Figure 6.40. The shear force and bending moment diagrams are shown, respectively, in Figures 6.41 and 6.42 which are the same as obtained in example 5.19.

### **Example 6.12**

The space frame with a roof slab shown in Figure 6.43 can be analyzed by distributing the slab weight on the surrounding girders using the attributed slab areas as shown in Figure 6.44. In this case, the problem becomes a one dimensional skeleton space frame. The input file of this problem is as shown in Figure 6.45. The bending moment about z-axis is shown in Figure 6.46. The bending moment along girder 1-2-3 is shown in Figure 6.47.

This structure can also be solved by discretizing the slab into finite elements as shown in Figure 6.48. The input file is given in Figure 6.49. The bending moment about z-axis is shown in Figure 6.50. The bending moment along the girder of nodes 1-2-3-4-5-6-7 is shown in Figure 6.51.

By comparing Figures 6.46 and 6.50 one finds out that in the second case, the girders are subjected to torsional moment which was not discovered in the first case due to neglecting the slab-girders interaction. Moreover, there are difference in the results of the bending moment of the girder and columns.



```

*****
*
*           S T A A D - III
*           Revision 18.0a
*           Proprietary Program of
*           RESEARCH ENGINEERS, Inc.
*           Date=   MAR  9, 1996
*           Time=   23:27:40
*
*****

```

```

1. STAAD PLANE VERIFY EXAMPLE 5.14
2. UNITS METER KN
3. JOINT COORDINATES
4. 1 0.0 0.0 ; 2 0.0 6.0 ; 3 12.0 6.0 ; 4 12.0 0.0
5. MEMBER INCIDENCES
6. 1 1 2 3
7. MEMBER PROPERTY
8. 1 3 PRIS AX 100000.0 IZ 100000.0
9. 2 PRIS YD 0.6 ZD 1.0 AX 200000.0 IZ 200000.0
10. CONSTANTS
11. E 1.0 ALL
12. ALPHA 0.00001
13. SUPPORTS
14. 1 FIXED ; 4 PINNED
15. LOADING 1
16. JOINT LOAD
17. 2 FX 36.0
18. MEMBER LOAD
19. 2 UNIFORM GY -2.5
20. TEMPERATURE LOAD
21. 2 TEMP 30.0 20.0
22. PERFORM ANALYSIS

```

#### PROBLEM STATISTICS

```

-----
NUMBER OF JOINTS/MEMBER+ELEMENTS/SUPPORTS =    4/    3/    2
ORIGINAL/FINAL BAND-WIDTH =    1/    1
TOTAL PRIMARY LOAD CASES =    1, TOTAL DEGREES OF FREEDOM =    7
SIZE OF STIFFNESS MATRIX =    42 DOUBLE PREC. WORDS
TOTAL REQUIRED DISK SPACE =    12.01 MEGA-BYTES

```

```

++ PROCESSING ELEMENT STIFFNESS MATRIX.           23:27:41
++ PROCESSING GLOBAL STIFFNESS MATRIX.           23:27:41
++ PROCESSING TRIANGULAR FACTORIZATION.           23:27:41
++ CALCULATING JOINT DISPLACEMENTS.             23:27:41
++ CALCULATING MEMBER FORCES.                     23:27:41

```

```

23. PRINT ANALYSIS RESULTS

```

Figure 6.30

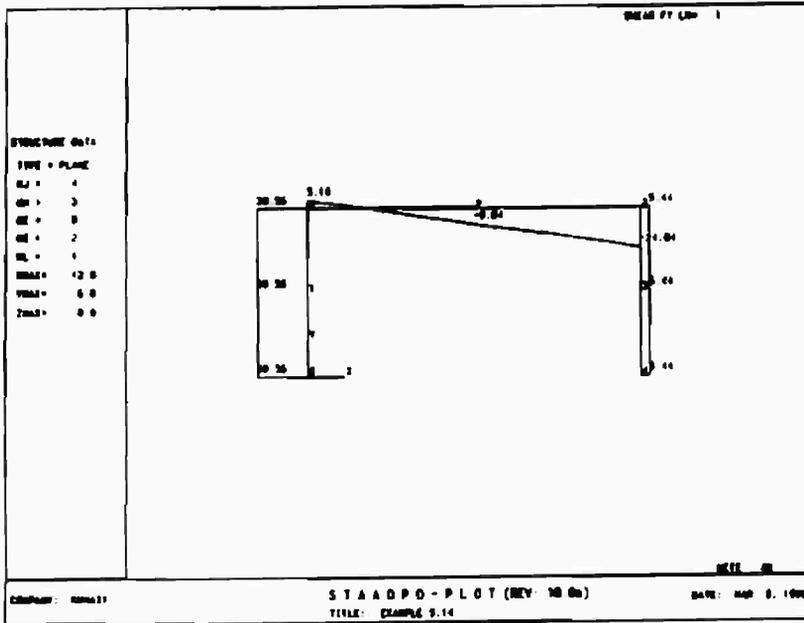


Figure 6.31

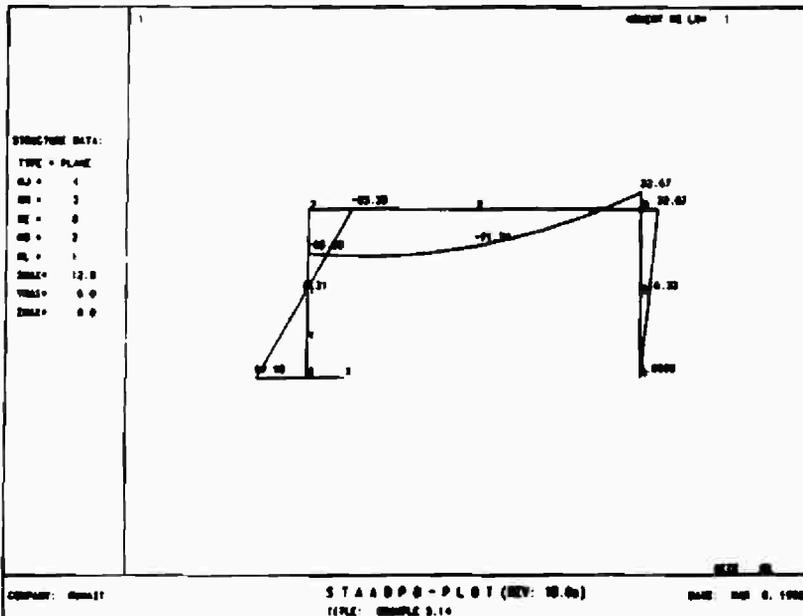


Figure 6.32

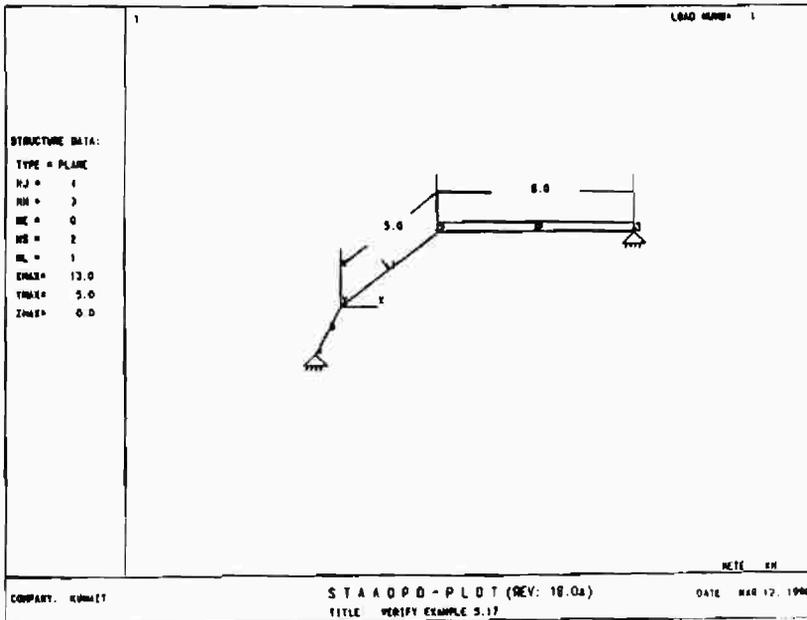


Figure 6.33

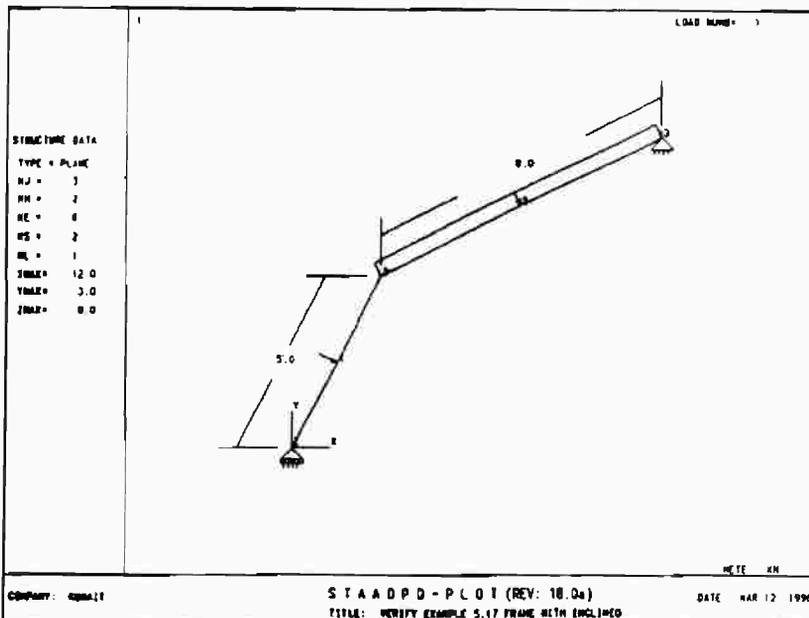


Figure 6.34

```

.....
*
*          S T A A D - III
*      Revision 18.0a
*      Proprietary Program of
*      RESEARCH ENGINEERS, Inc.
*      Date=   MAR  9, 1996
*      Time=   23:26:38
*
.....

1. STAAD PLANE VERIFY EXAMPLE 5.17
2. UNITS METER KM
3. JOINT COORDINATES
4. 1 0.0 0.0 ; 2 4.0 3.0 ; 3 12.0 3.0 ; 4 -1.0 -2.0
5. MEMBER INCIDENCES
6. 1 1 2 ; 2 2 3 ; 3 1 4
7. MEMBER RELEASE
8. 1 3 START MZ
9. MEMBER PROPERTY
10. 1 TO 3 PRIS AX 100000.0 IZ 1.0
11. CONSTANTS
12. E 2500000000.0 ALL
13. SUPPORTS
14. 4 PINNED
15. 3 PINNED
16. LOADING 1
17. MEMBER LOADING
18. 2 UNIFORM GY -2.0
19. 1 CONCENTRATED Y -8.0 2.5
20. PERFORM ANALYSIS

      P R O B L E M   S T A T I S T I C S
      -----
NUMBER OF JOINTS/MEMBER+ELEMENTS/SUPPORTS =      4/      3/      2
ORIGINAL/FINAL BAND-WIDTH =      3/      1
TOTAL PRIMARY LOAD CASES =      1, TOTAL DEGREES OF FREEDOM =      8
SIZE OF STIFFNESS MATRIX =      48 DOUBLE PREC. WORDS
TOTAL REQUIRED DISK SPACE =      12.01 MEGA-BYTES

++ PROCESSING ELEMENT STIFFNESS MATRIX.          23:26:38
++ PROCESSING GLOBAL STIFFNESS MATRIX.          23:26:38
++ PROCESSING TRIANGULAR FACTORIZATION.         23:26:38
++ CALCULATING JOINT DISPLACEMENTS.           23:26:38
++ CALCULATING MEMBER FORCES.                  23:26:38

21. PLOT BENDING FILES
22. PRINT ANALYSIS RESULTS

```

Figure 6.35

```

*****
*
*          S T A A D - III
*          Revision 16.0a
*          Proprietary Program of
*          RESEARCH ENGINEERS, Inc.
*          Date=   MAR  9, 1996
*          Time=   23:24:53
*
*****

```

1. STAAD PLANE VERIFY EXAMPLE 5.17 FRAME WITH INCLINED ROLLER SUPPORT
2. UNITS METER KN
3. JOINT COORDINATES
4. 1 0.0 0.0 ; 2 4.0 3.0 ; 3 12.0 3.0
5. MEMBER INCIDENCES
6. 1 1 2 ; 2 2 3
7. PERFORM ROTATION Z 26.56
8. MEMBER PROPERTY
9. 1 2 PRIS AX 100000.0 IZ 1.0
10. CONSTANTS
11. E 2500000000.0 ALL
12. SUPPORTS
13. 1 FIXED BUT FX MZ
14. 3 PINNED
15. LOADING 1
16. MEMBER LOADING
17. 2 UNIFORM Y -2.0
18. 1 CONCENTRATED Y -8.0 2.5
19. PERFORM ANALYSIS

P R O B L E M   S T A T I S T I C S

-----

```

NUMBER OF JOINTS/MEMBER*ELEMENTS/SUPPORTS =      3/   2/   2
ORIGINAL/FINAL BAND-WIDTH =      1/   1
TOTAL PRIMARY LOAD CASES =      1, TOTAL DEGREES OF FREEDOM =      6
SIZE OF STIFFNESS MATRIX =      30 DOUBLE PREC. WORDS
TOTAL REQUIRED DISK SPACE =      12.00 MEGA-BYTES

```

```

++ PROCESSING ELEMENT STIFFNESS MATRIX.          23:24:54
++ PROCESSING GLOBAL STIFFNESS MATRIX.          23:24:54
++ PROCESSING TRIANGULAR FACTORIZATION.         23:24:54
++ CALCULATING JOINT DISPLACEMENTS.           23:24:54
++ CALCULATING MEMBER FORCES.                  23:24:54

```

20. PLOT BENDING FILES
21. PRINT ANALYSIS RESULTS

Figure 6.36

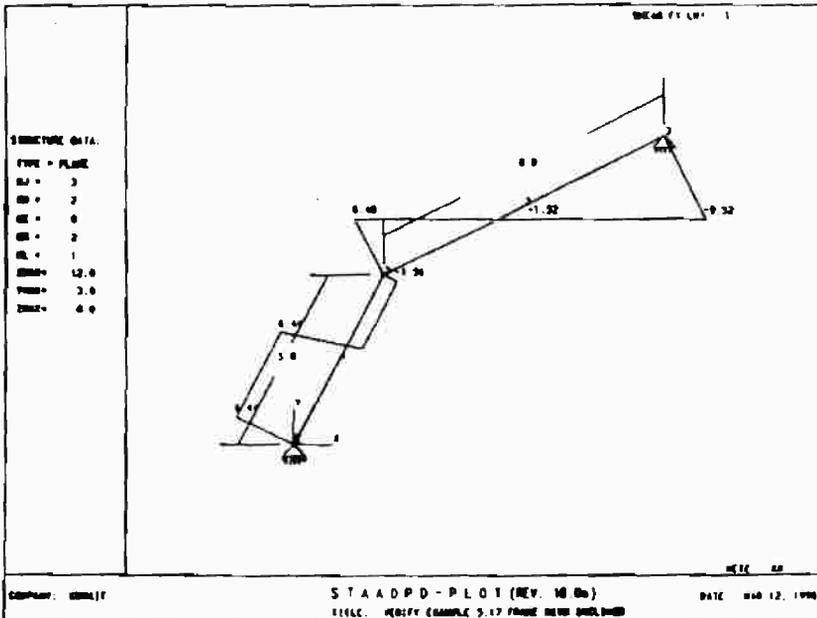
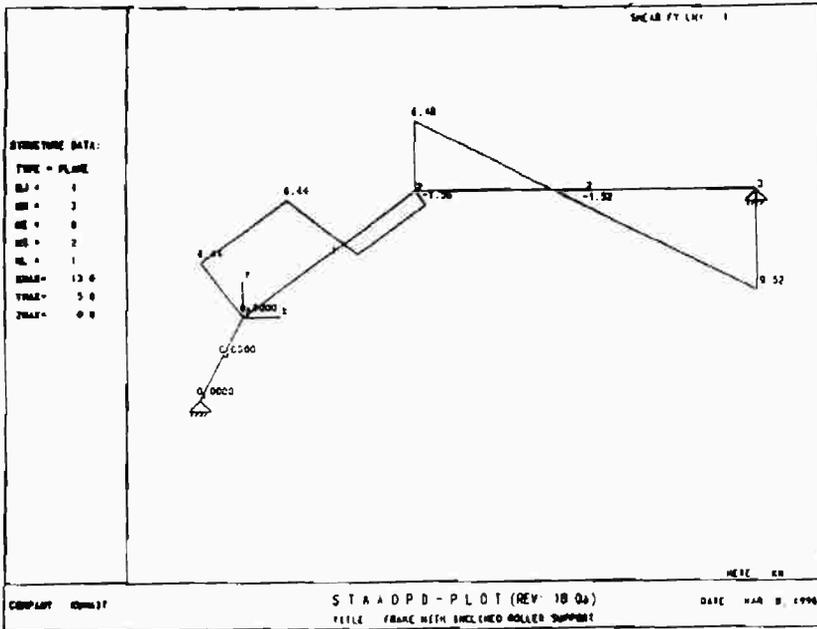


Figure 6.37

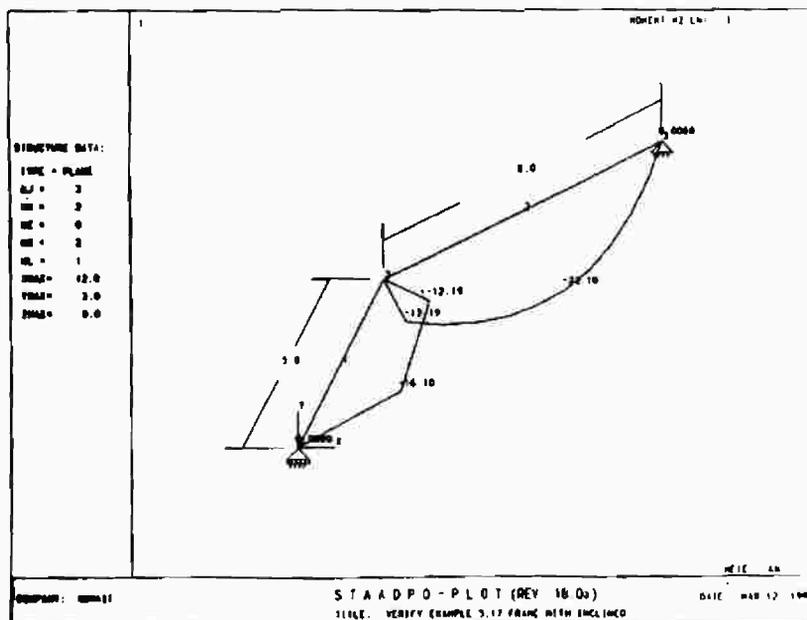
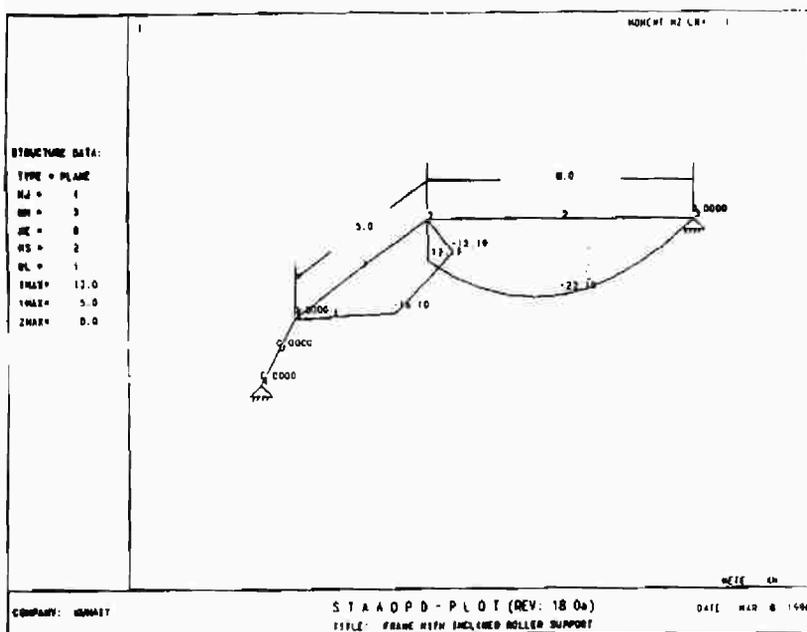


Figure 6.38

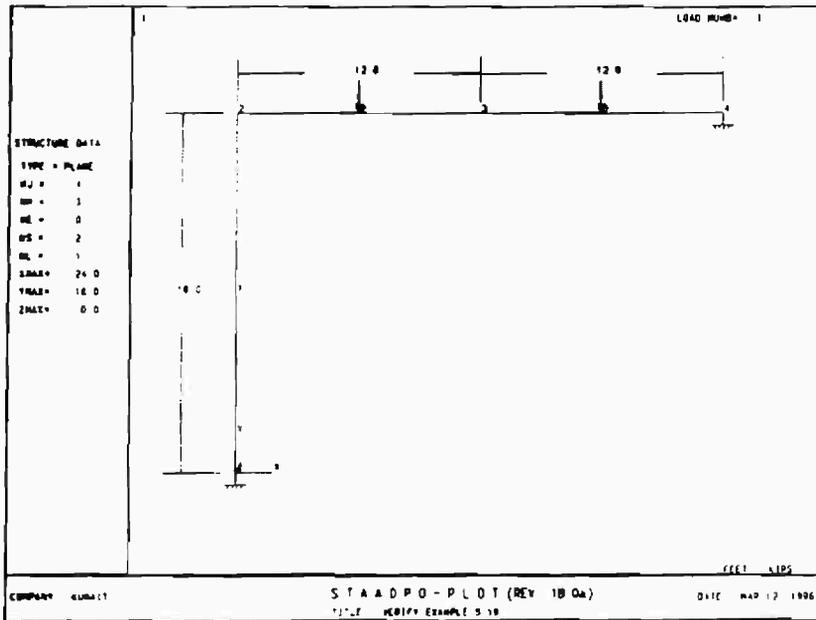


Figure 6 39

```

*****
*
*           S T A A D - III
*           Revision 18.0a
*           Proprietary Program of
*           RESEARCH ENGINEERS, Inc.
*           Date=   MAR 8, 1996
*           Time=   21:13:22
*
*****

```

1. STAAD PLANE EXAMPLE 5.19
2. UNITS FEET KIPS
3. JOINT COORDINATES
4. 1 0.0 0.0 ; 2 0.0 18.0 ; 3 12.0 18.0 ; 4 24.0 18.0
5. MEMBER INCIDENCES
6. 1 1 2 3
7. MEMBER PROPERTY
8. 1 3 PRIS AX 1.0 IZ 100.0
9. 2 PRIS AX 2.0 IZ 300.0
10. CONSTANTS
11. E 1000.0 ALL
12. SUPPORTS
13. 1 4 FIXED
14. LOAD 1
15. MEMBER LOAD
16. 2 CONCEN GY -30.0 6.0
17. 3 CONCEN GY -30.0 6.0
18. PERFORM ANALYSIS

#### P R O B L E M   S T A T I S T I C S

```

-----
NUMBER OF JOINTS/MEMBER-ELEMENTS/SUPPORTS =   4/   3/   2
ORIGINAL/FINAL BAND-WIDTH =   1/   1
TOTAL PRIMARY LOAD CASES =   1, TOTAL DEGREES OF FREEDOM =   6
SIZE OF STIFFNESS MATRIX =   36 DOUBLE PREC. WORDS
TOTAL REQUIRED DISK SPACE =   12.00 MEGA-BYTES

```

```

** PROCESSING ELEMENT STIFFNESS MATRIX.           21:13:22
** PROCESSING GLOBAL STIFFNESS MATRIX.           21:13:22
** PROCESSING TRIANGULAR FACTORIZATION.           21:13:22
** CALCULATING JOINT DISPLACEMENTS.             21:13:23
** CALCULATING MEMBER FORCES.                     21:13:23

```

19. PRINT ANALYSIS RESULTS

Figure 6.40

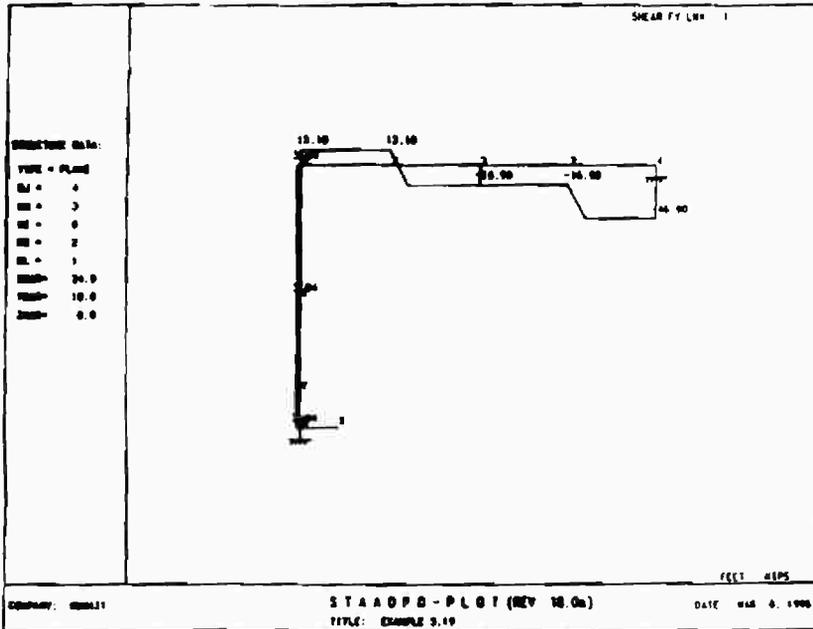


Figure 6.41

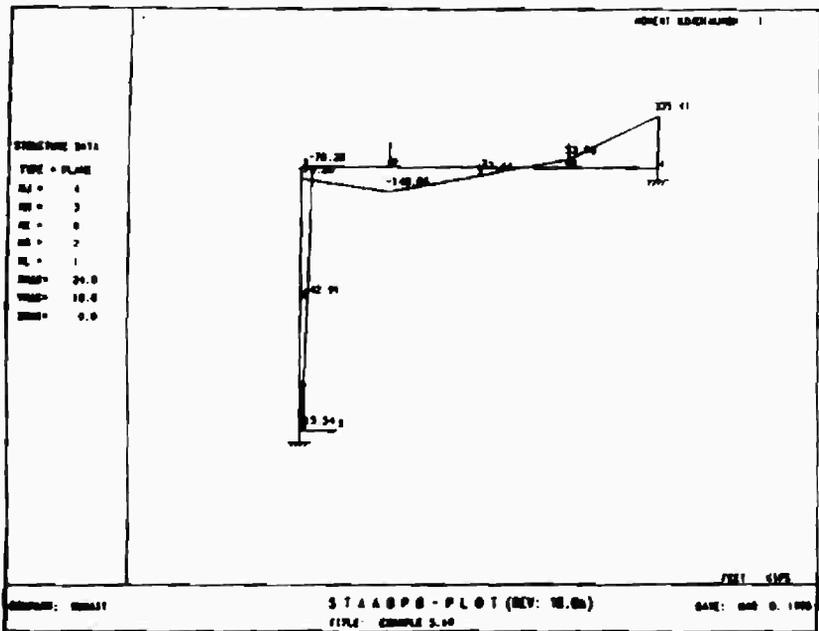


Figure 6.42

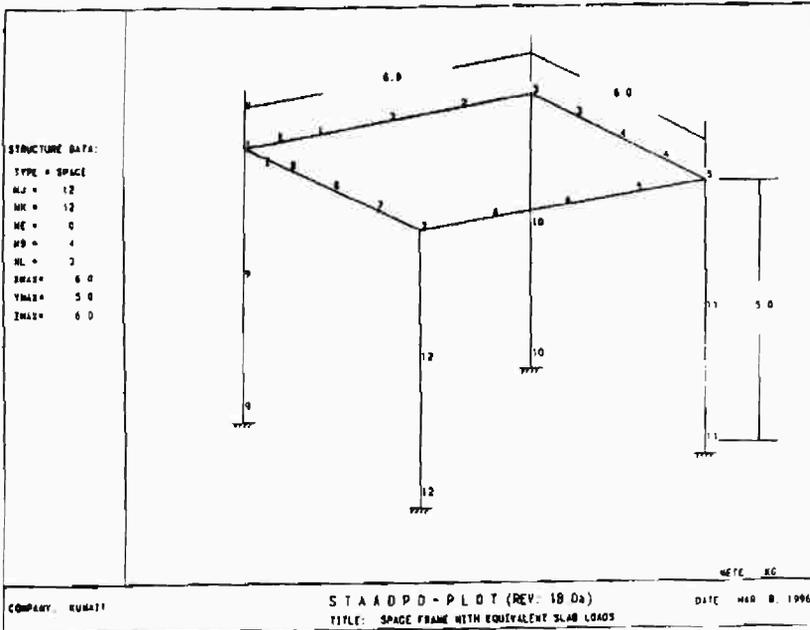


Figure 6.43

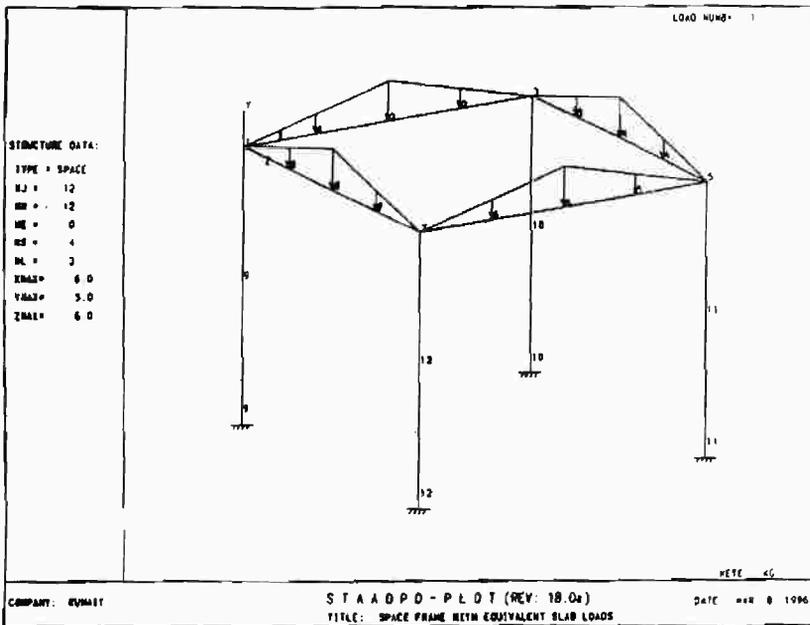


Figure 6.44

```

*****
*
*          S T A A D - III
*        Revision 18.0a
*        Proprietary Program of
*        RESEARCH ENGINEERS, Inc.
*        Date=   MAR  4, 1996
*        Time=   1: 3:26
*
*****

```

```

1. STAAD SPACE TESTING SLAB EFFECT
2. UNIT METER KG
3. JOINT COORDINATES
4. 1 0.0 0.0 0.0 3 6.0 0.0 0.0
5. 4 6.0 0.0 3.0 ; 5 6.0 0.0 6.0
6. 6 3.0 0.0 6.0 ; 7 0.0 0.0 6.0 ; 8 0.0 0.0 3.0
7. 9 0.0 -5.0 0.0
8. 10 6.0 -5.0 0.0
9. 11 6.0 -5.0 6.0
10. 12 0.0 -5.0 6.0
11. MEMBER INCIDENCES
12. 1 1 2 7; 8 8 1
13. 9 1 9 ; 10 3 10 ; 11 5 11 ; 12 7 12
14. MEMBER PROP
15. 1 TO 8 PRIS YD 0.5 ZD 0.4
16. 9 TO 12 PRIS YD 0.6 ZD 0.6
17. CONSTANT
18. E 2500000000.0 ALL
19. DEN 2450.0 ALL
20. SUPPORTS
21. 9 TO 12 FIXED
22. LOAD 1
23. SELFWEIGHT Y -1.0
24. MEMB LOAD
25. 1 3 5 7 LIN GY 0.0 -1335.0
26. 2 4 6 8 LIN GY -1335.0 0.0
27. LOAD 2
28. MEMB LOAD
29. 1 3 5 7 LIN GY 0.0 -1500.0
30. 2 4 6 8 LIN GY -1500.0 0.0
31. LOAD COMBINATION 3
32. 1 1.0 2 1.0
33. LOAD COMBINATION 4
34. 1 1.4 2 1.7
35. PERFORM ANALYSIS

```

#### PROBLEM STATISTICS

```

-----
NUMBER OF JOINTS/MEMBER+ELEMENTS/SUPPORTS = 12/ 12/ 4
ORIGINAL/FINAL BAND-WIDTH = 8/ 4
TOTAL PRIMARY LOAD CASES = 2, TOTAL DEGREES OF FREEDOM = 48
SIZE OF STIFFNESS MATRIX = 864 DOUBLE PREC. WORDS
TOTAL REQUIRED DISK SPACE = 12.03 MEGA-BYTES

```

```

** PROCESSING ELEMENT STIFFNESS MATRIX. 1: 3:28
** PROCESSING GLOBAL STIFFNESS MATRIX. 1: 3:28
** PROCESSING TRIANGULAR FACTORIZATION. 1: 3:29
** CALCULATING JOINT DISPLACEMENTS. 1: 3:29
** CALCULATING MEMBER FORCES 1: 3:29

```

```

36. PRINT ANALYSIS RESULTS

```

Figure 6 45



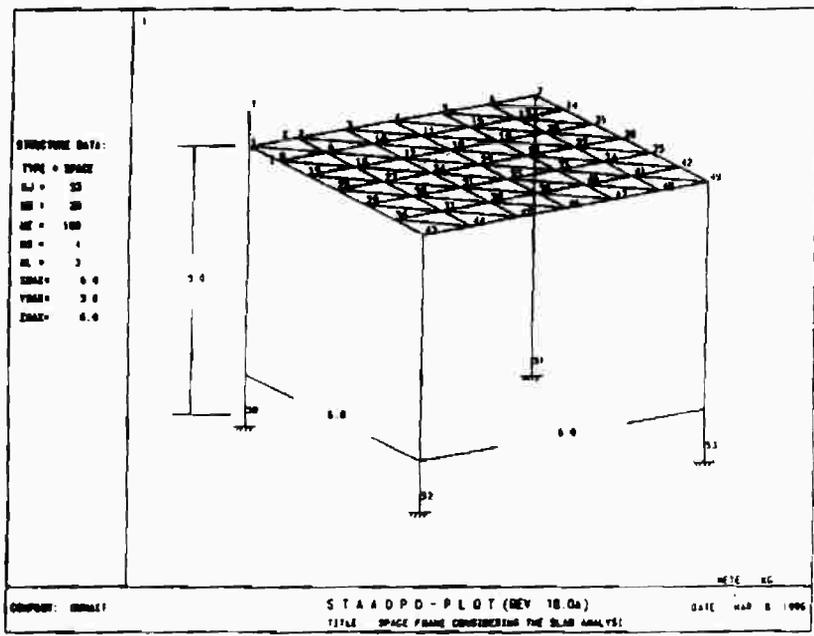


Figure 6.48

```

*****
*
*           S T A A D - III
*           Revision 10.0a
*           Proprietary Program of
*           RESEARCH ENGINEERS, Inc.
*           Date=   MAR  8, 1996
*           Time=  17:45:36
*
*****

```

```

1. STAAD SPACE SPACE FRAME CONSIDERING THE SLAB ANALYSIS
2. UNITS METER KG
3. JOINT COORDINATE
4. 1 0.0 0.0 0.0 7 6.0 0.0 0.0 ; 8 0.0 0.0 1.0 14 6.0 0.0 1.0
5. 15 0.0 0.0 2.0 21 6.0 0.0 2.0 ; 22 0.0 0.0 3.0 28 6.0 0.0 3.0
6. 29 0.0 0.0 4.0 35 6.0 0.0 4.0 ; 36 0.0 0.0 5.0 42 6.0 0.0 5.0
7. 43 0.0 0.0 6.0 49 6.0 0.0 6.0
8. 50 0.0 -5.0 0.0 ; 51 6.0 -5.0 0.0 ; 52 0.0 -5.0 6.0 ; 53 6.0 -5.0 6.
9. MEMBER INCIDENCES
10. 1 1 2 6 ; 7 7 14 12 1 7 ; 13 1 8 18 1 7 ; 19 43 44 24
11. 25 1 50 ; 26 7 51 ; 27 43 52 ; 28 49 53
12. ELEMENT INCIDENCES
13. 29 1 2 9 TO 34
14. 35 8 1 9 TO 40
15. 41 8 9 16 TO 46
16. 47 15 8 16 TO 52
17. 53 15 16 23 TO 58
18. 59 22 15 23 TO 64
19. 65 22 23 30 TO 70
20. 71 29 22 30 TO 76
21. 77 29 30 37 TO 82
22. 83 36 29 37 TO 88
23. 89 36 37 44 TO 94
24. 95 43 36 44 TO 100
25. CONSTANTS
26. E 2500000000.0 ALL
27. DEN 2450.0 ALL
28. MFMB PROP
29. 1 TO 24 PRIS YD 0.5 ZD 0.4
30. 25 TO 28 PRIS YD 0.6 ZD 0.6
31. ELEM PROP
32. 29 TO 100 THICK 0.10
33. SUPPORTS
34. 50 TO 53 FIXED
35. LOAD 1 DEAD LOAD
36. SELFWEIGHT Y -1.0
37. ELEM LOAD
38. 29 TO 100 PR GY -200.0
39. LOAD 2 LIVE LOAD
40. ELEM LOAD
41. 29 TO 100 PR GY -500.0
42. LOAD COMBINATION 3
43. 1 1.0 2 1.0
44. PERFORM ANALYSIS

```

#### PROBLEM STATISTICS

```

-----
NUMBER OF JOINTS/MEMBER+ELEMENTS/SUPPORTS =   53/ 100/   4
ORIGINAL/FINAL BAND-WIDTH =   49/   8
TOTAL PRIMARY LOAD CASES =   2, TOTAL DEGREES OF FREEDOM =  294
SIZE OF STIFFNESS MATRIX =  14112 DOUBLE PREC. WORDS
TOTAL REQUIRED DISK SPACE =   12.69 MEGA-BYTES

```

```

++ PROCESSING ELEMENT STIFFNESS MATRIX.           17:45:38
++ PROCESSING GLOBAL STIFFNESS MATRIX.           17:45:38
++ PROCESSING TRIANGULAR FACTORIZATION.           17:45:39
++ CALCULATING JOINT DISPLACEMENTS.             17:45:40
++ CALCULATING MEMBER FORCES.                    17:45:40

```

```

45. PRINT ANALYSIS RESULTS

```

Figure 6.49

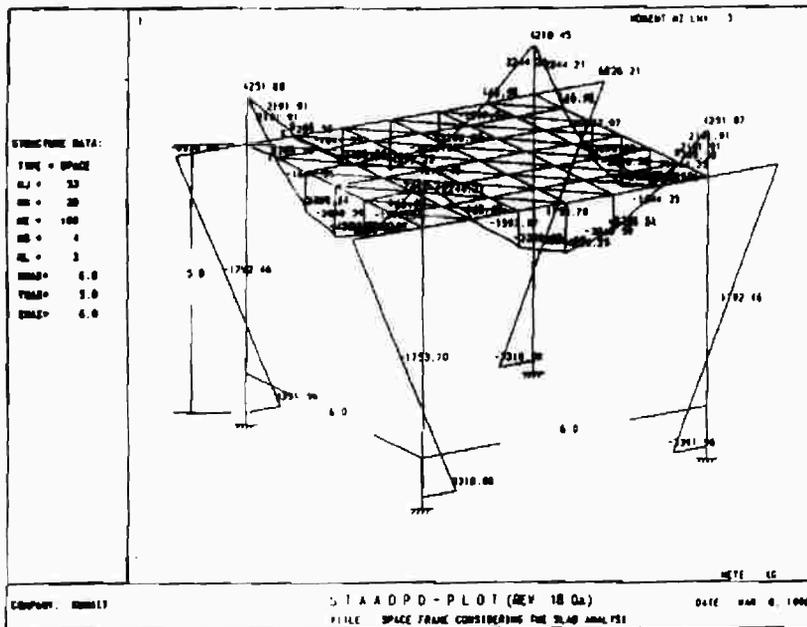


Figure 6.50

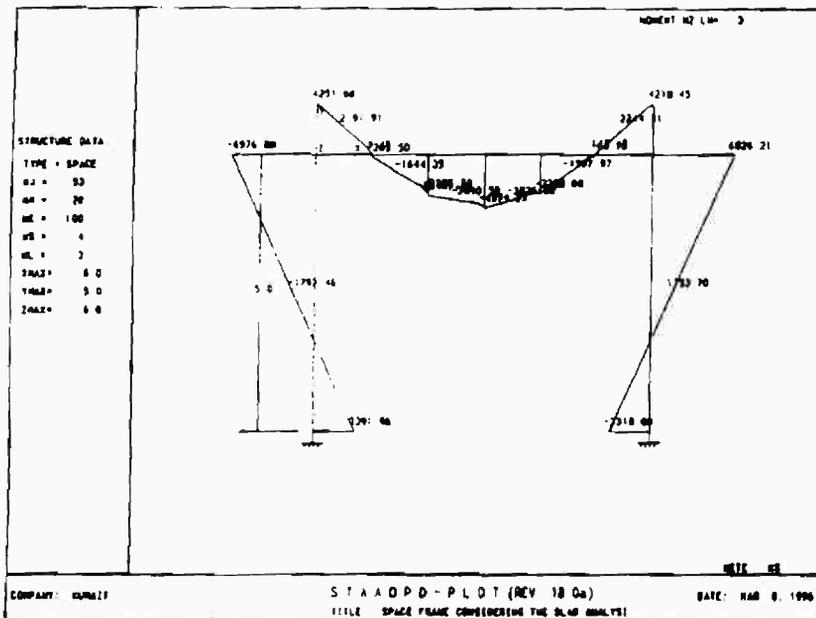


Figure 6.51



### References

1. J.M. Gere and W. Weaver, Jr., *Analysis of Framed Structures*, Van Nostrand, N.Y., 1965.
2. R.K. Livesley, *Matrix Methods of Structural Analysis*, Macmillan, N.Y., 1964.
3. H.C. Martin, *Introduction to Matrix Methods of Structural Analysis*, McGraw-Hill, N.Y., 1966.
4. J.S. Przemieniecki, *Theory of Matrix Structural Analysis*, McGraw-Hill, N.Y., 1968.
5. M.F. Rubenstein, *Matrix Computer Analysis of Structures*, Prentice-Hall, Englewood Cliffs, N.J. 1966.
6. N. Willems and W.M. Lucas, Jr., *Matrix Analysis of Structures*, Prentice-Hall, N.J., 1968.
7. A. Ghali and A.M. Neville, *Structural Analysis : A Unified Classical and Matrix Approach*, Chapman and Hall Ltd., London, 1978.
8. C. Norris, J. Wilbur, and S. Utku, *Elementary Structural Analysis*, McGraw-Hill, N.Y., 1977.
9. S. El-Beahry, *Reinforced Concrete Design Handbook*, Ain Shams University, Cairo, 1971.
10. D.E. Grierson, *Matrix Structural Analysis*, University of Waterloo, Ontario, Canada, 1983.
11. R.K. Livesley, *Finite Elements : An Introduction for Engineers*, Cambridge University Press, England, 1983.
12. O.C. Zienkiewicz, *The Finite Element Method*, McGraw-Hill, New York, 1977.
13. J.J. Tuma, and R.K. Munshi, *Advanced Structural Analysis*, Schaum's Outline Series, McGraw-Hill, N.Y., 1971.
14. H.I. Laursen, *Structural Analysis*, McGraw-Hill, N.Y., 1978.
15. S.P. Timoshenko and D.H. Young, *Theory of Structures*, McGraw-Hill, N.Y., 1965.
16. K.H. Bray, P.C. Croxton, and L.H. Martin, *Matrix Analysis of Structures*, Edward Arnold, England, 1976.
17. V.J. Meyers, *Matrix Analysis of Structures*, Harper & Row, N.Y., 1983.

18. STAAD-III/ISDS Manual, Research Engineers, California, 1992.
19. C.K. Wang, "Intermediate Structural Analysis", McGraw-Hill, 1983.
20. S. Utku, C.H. Norris & J.B. Wilbur, "Elementary Structural Analysis", McGraw-Hill, 1991.
21. J. McCormac and Nelson, "Structural Analysis : A Classical and Matrix Approach", Adison-Wesley, N Y , 1997.
22. J.C. Smith, "Structural Analysis", Harper & Row, 1988.
23. H.H. West, "Analysis of Structures", John Wiley & Sons, 1980.
24. H. Kardestuncer, "Elementary Matrix Analysis of Structures", McGraw-Hill, 1974.
25. M.D. Vanderbilt, "Matrix Structural Analysis", Quantum Publishers, N.Y., 1974.
26. Y. Hsieh and S.T. Mau, "Elementary Theory of Structures", Prentice-Hall, 1995.
27. L.P. Felton and R.B. Nelson, "Matrix Structural Analysis", John Wiley & Sons, 1997.
28. S.S. Rao, "The Finite Element Method", Pergamon Press, 1989.
29. Marshall and Nelson, "Structures", Longman Scientific and Technical, 1990.
30. R.C. Hibbeler, "Structural Analysis", Macmillan Publishing Co., 1985.
31. M. Abdel-Rohman and S. Al-Mulla, "Structural Analysis : A Transition from Classical to Matrix Methods", Kuwait University Publications, First Edition, 1986.

### Answers to Exercises

#### Chapter 2

2. (a)  $60.355 \times 10^{-3} \text{ m} (\downarrow)$  (b)  $306.274 \times 10^{-3} \text{ m} (\downarrow)$
3. (a)  $\frac{PL^3}{3}$  (b)  $-2.8336 (\downarrow)$  (c)  $-0.70833 PL^3 (\downarrow)$
9.  $0.00779 \text{ m} (\downarrow)$
10.  $\theta_D = 26.67 \times 10^{-3} \text{ rad}$  ,  $\Delta_C = 938.67 \times 10^{-3} \text{ m} (\downarrow)$

#### Chapter 3

2. Elastic Centre at D
- $I_x = 4096/EI$  ;  $I_y = 2730.67/EI$  ;  $I_{xy} = -2048/EI$   
 $M_A = -166.4 \text{ kN.m}$  ;  $M_B = +35.46 \text{ kN.m}$  ;  $M_C = -54.13 \text{ kN.m}$
5.  $R_B = 2.829 \text{ kN} (\downarrow)$  ;  $\Delta_B = 0.2829 \text{ cm} (\downarrow)$
6. (a)  $M_B = 46.42 \text{ kN.m}$  (b)  $M_B = 47.695 \text{ kN.m}$  (c)  $M_B = -0.0766 \text{ kN.m}$
7.  $F_{BD} = 22.937 \text{ kN}$  ;  $M_C = +1.2 \text{ kN.m}$   
 $F_{AX} = 1.45 \text{ kN} (\rightarrow)$  ;  $M_B = -8.7 \text{ kN.m}$   
 $\Delta_C = 0.0028 \text{ cm}$
8.  $x_1 = R_A = 9.43 \text{ Kips}$  ,  $\Delta_{10} = -0.2 \text{ ft}$  ;  $f_{11} = 0.03 \text{ ft}$  ;  $\Delta_1 = 1 \text{ inch}$
10.  $M_B = 3525.82 \text{ kN.m}$  ;  $M_C = -4598.7 \text{ kN.m}$
11.  $x_1 = F_{CF} = -2/59 \text{ kN}$  ;  $x_2 = R_c = 23.87 \text{ kN} (\uparrow)$   
 $\Delta_{10} = -\frac{34.15 \times 5}{EA}$  ;  $\Delta_{20} = -\frac{93.23 \times 5}{EA}$   
 $F_B = 10 \text{ kN}$  ;  $F_{TC} = 10 \text{ kN}$  ;  $F_{CB} = 20 \text{ kN}$
12.  $x_1 = R_{AX} = -1.42 \text{ kN} (\leftarrow)$  ;  $x_2 = R_{AY} = -0.284 \text{ kN} (\downarrow)$   
 $\Delta_{10} = 0.0045 \text{ ft}$  ;  $\Delta_{20} = 0.00225 \text{ ft}$
13. (a)  $\Delta_B = 1.867 \text{ in} (\downarrow)$  ;  $\Delta_C = 1.15 \text{ in} (\downarrow)$   
 $R_C = 1.133 \text{ kips} (\uparrow)$  ;  $R_B = 3.734 \text{ Kips} (\uparrow)$   
 (b)  $M_B = -6.44 \text{ K.ft}$  ;  $M_C = -26.59 \text{ K.ft}$
14.  $x_1 = F_{DG}$  ;  $x_2 = F_{GD}$   
 $x_3 = R_{CX}$  ;  $x_4 = R_{CY}$   
 $F_{AB} = 0.32 \text{ kN}$  ;  $F_{TC} = 5.09 \text{ kN}$   
 $F_{CD} = -0.64 \text{ kN}$  ;  $F_{DE} = -0.32 \text{ kN}$  etc...

$$16. \quad \begin{aligned} x_1 &= A_{yCD} & ; & \quad x_2 = A_{xCD} & ; & \quad x_3 = M_{zCD} \\ x_4 &= A_{yBE} & ; & \quad x_5 = A_{xBE} & ; & \quad x_6 = M_{zBE} \end{aligned}$$

18. Elastic centre at 7.5 ft from AD.

$$\begin{aligned} A &= 16/EI & ; & \quad I_x = 252/EI & ; & \quad M_i = 16.25 + 3.124 y \\ M_A &= -7.85 \text{ K.ft} & ; & \quad M_B = -29.28 \text{ K.ft} \end{aligned}$$

$$19. \quad \begin{aligned} x_1 &= F_{BD} = -8.536 \text{ Kips} \\ \Delta_{10} &= 617.95/EI & ; & \quad f_{11} = 72.39/EI \\ F_{AD} &= -13.97 \text{ Kips} & ; & \quad F_{AB} = 6.03 \text{ Kips} \end{aligned}$$

$$24. \quad \begin{aligned} x_1 &= R_C = 50 \text{ kN} (\leftarrow) \\ \Delta_{10} &= \frac{-1207.1}{EA} & ; & \quad f_{11} = \frac{24.142}{EA} & ; & \quad F_{AB} = -30 \text{ kN} \end{aligned}$$

$$25. \quad \begin{aligned} x_1 &= R_{Bx} = -6.653 \text{ Kips} & ; & \quad x_2 = R_{By} = 0.54 \text{ Kips} \\ M_C &= -47.03 \text{ K.ft} & ; & \quad M_A = -13.98 \text{ K.ft} \end{aligned}$$

$$27. \quad M_B = 570.9 \text{ kN.m.} \quad ; \quad M_C = -1030.46 \text{ kN.m.}$$

$$29. \quad \begin{aligned} \text{At elastic centre } x_1 &= 4.581 \text{ kN} (\leftarrow \rightarrow) & ; & \quad x_2 = 0 & ; & \quad x_3 = -25.9 \text{ kN.m} \\ I_x &= 268.19/EI & ; & \quad I_y = 320/EI \\ M_A &= +5.613 \text{ kN.m} & ; & \quad M_D = -11.035 \text{ kN.m.} \end{aligned}$$

$$30. \quad \begin{aligned} \text{For } x_1 &= F_{AD} & ; & \quad x_2 = R_E \\ \underline{\Delta}_0 &= \begin{bmatrix} -1866.67/EI \\ -864/EI \end{bmatrix} & ; & \quad [f] = \frac{1}{EI} \begin{bmatrix} 146.88 & 28.8 \\ 28.8 & 34.56 \end{bmatrix} \\ F_{AB} &= 1.34 \text{ kN} & ; & \quad F_{AC} = 10.33 \text{ kN} & ; & \quad F_{CD} = -1.34 \text{ kN} \\ F_{DE} &= +12.44 \text{ kN} & ; & \quad F_{BE} = -15.55 \text{ kN} & ; & \quad F_{BC} = -17.22 \text{ kN} \\ F_{AD} &= +17.22 \text{ kN} \end{aligned}$$

$$31. \quad \begin{aligned} \text{For } x_1 &= F_{Dx} = R_{Dx} = -16.495 \text{ kN} & ; & \quad x_2 = R_{Dy} = 46.726 \text{ kN} \\ x_3 &= M_D = -169.695 \text{ kN.m} \end{aligned}$$

$$\underline{\Delta}_0 = \begin{bmatrix} -28.6 \\ -48.67 \\ 2.5 \end{bmatrix}, \quad [f] = \begin{bmatrix} 1.3533 & 0.8 & -0.08 \\ 0.8 & 1.1067 & -0.06 \\ -0.08 & -0.06 & 0.006 \end{bmatrix}$$

$$32. \quad [f] = \frac{20^3}{EI} \begin{bmatrix} 0.4167 & 0.25 \\ 0.25 & 1.333 \end{bmatrix}; \quad \begin{bmatrix} x_1 \\ x_2 \end{bmatrix} = \begin{bmatrix} -3.662 \\ 19.43 \end{bmatrix} \quad \begin{matrix} (\leftarrow) \\ (\uparrow) \end{matrix}$$

$$x_1 = R_{Dx}, \quad x_2 = R_{Dy}, \quad M_A = 25.35 \text{ K.ft}, \quad R_{Ay} = 20.56 \text{ K.ft} (\uparrow)$$

34.  $x_1 = R_B$  ,  $x_2 = R_C$   
 $R_B = 0.768 \text{ Kips } (\uparrow)$  ,  $R_C = 0.44 \text{ Kips } (\uparrow)$   
 $R_A = 0.12 \text{ Kips } (\downarrow)$  ,  $R_D = 0.089 \text{ Kips } (\downarrow)$
35.  $x_1 = R_D = 1.0285 \text{ Kip } (\uparrow)$  ,  $x_2 = F_{FC} = -6.465 \text{ Kips}$   
 $\Delta_{10} = -22.4 \times 10^{-3}$  ,  $\Delta_{20} = 22.8 \times 10^{-3}$
36. (a)  $K_{AB} = K_{BA} = 0.447$  ,  $C_{AB} = C_{BA} = 0.5928$   
 (b)  $M_{FAB} = -19.9 \text{ K.ft}$  ,  $M_{FBA} = -26 \text{ K.ft}$
37.  $A = \frac{24}{EI}$  ,  $I_x = 160/EI$  ,  $I_y = 197.33/EI$   
 $M_i = 2.22 + 0.23 y$   
 $M_B = M_E = -5.78 \text{ kN.m}$  ;  $M_A = M_F = 1.42 \text{ kN.m}$   
 $M_C = M_D = 3.01 \text{ kN.m}$
40.  $F_{AD} = 0.747 \text{ kN}$  ,  $F_{CB} = -5.5 \text{ kN}$  ,  $\Delta_C = 38.65/EA$   
 $R_{AY} = 6.25 \text{ kN}$  ;  $R_{AX} = 0.6 \text{ kN } (\leftarrow)$
41.  $M_A = 30.125 \text{ K.ft}$  ;  $M_B = -60.25 \text{ K.ft}$   
 $R_B = 30.295 \text{ Kips}$  ,  $\theta_A = 0$  from B.M.D.
42.  $x_1 = F_{BD} = 1.65 \text{ Kips}$  ,  $x_2 = F_{AC} = 4.128 \text{ Kips}$   
 $M_B = -15.62 \text{ K.ft}$  ,  $M_C = -15.84 \text{ K.ft}$   
 $\Delta_{10} = -0.81778 \text{ ft}$  ,  $\Delta_{20} = -1.3308 \text{ ft}$
43.  $M_B = -10.97 \text{ kN.m}$  ;  $M_C = -5.197 \text{ kN.m}$   
 $M_A = -19.133 \text{ kN.m}$
44. Elastic center at A  
 $I_x = 369/EI$  ;  $I_y = 1584/EI$  ,  $I_{xy} = 378/EI$   
 $M_i = -2.496 y + 2.436 x$   
 $M_B = -14.976 \text{ kN.m}$  ;  $M_C = 14.256 \text{ kN.m}$   
 $M_D = -17.28 \text{ kN.m}$

### Chapter 4

1.  $M_{AB} = 1865.53 \text{ kN.m}$  ,  $\theta_B = -0.00603$   
 $M_{BA} = 397.32 \text{ kN.m}$  ,  $\theta_C = 0.003455$   
 $M_{CD} = -20 \text{ kN.m}$  ,  $\theta_D = 0.0033569$  ,  $\Delta_D = 0.00676 \text{ m } (\uparrow)$
2.  $M_{AB} = 14.76 \text{ kN.m}$  ,  $M_{BA} = -22.26 \text{ kN}$   
 $M_{BC} = -0.233 \text{ kN.m}$  ,  $M_{CB} = -24.99 \text{ kN.m}$   
 $M_{DC} = -21.24 \text{ kN.m}$  ,  $M_{DE} = 11.24 \text{ kN.}$

4.  $M_{AB} = -68.65 \text{ kN.m}$        $M_{BA} = -142.92 \text{ kN.m}$   
 $M_{BC} = 112.92 \text{ kN.m}$        $M_{CB} = 265.47 \text{ kN.m}$   
 $M_{CD} = -265.47 \text{ kN.m}$
5.  $M_{AB} = 11.98 \text{ kN.m}$  ,  $M_{BA} = -12.56 \text{ kN.m}$   
 $M_{BC} = 12.56 \text{ kN.m}$  ,  $M_{CB} = -10.58 \text{ kN.m}$   
 $M_{CE} = -7.7 \text{ kN.m}$  ,  $M_{EC} = -25.33 \text{ kN.m}$   
 $M_{CD} = 18.28 \text{ kN.m}$
6.  $M_{DC} = -27.9 \text{ kN.m}$  ,  $M_{DA} = -21.84 \text{ kN.m}$   
 $M_{AD} = -10.77 \text{ kN.m}$  ,  $M_{DE} = 49.74 \text{ kN.m}$   
 $M_{ED} = -44.65 \text{ kN.m}$  ,  $M_{EB} = 25.7 \text{ kN.m}$   
 $M_{BE} = 12.53 \text{ kN.m}$  ,  $M_{EF} = 18.95 \text{ kN.m}$   
 $M_{FE} = -22.5 \text{ kN.m}$  ,  $M_{FG} = 22.5 \text{ kN.m}$
7.  $M_{DC} = -18.917 \text{ kN.m}$   
 $M_{DA} = 9.7 \text{ kN.m}$  ,  $M_{AD} = 4.77 \text{ kN.m}$   
 $M_{DF} = 6.2 \text{ kN.m}$  ,  $M_{DE} = 3.01 \text{ kN.m}$   
 $M_{ED} = -0.415 \text{ kN.m}$  ,  $M_{BE} = -8.92 \text{ kN.m}$
11.  $M_{AB} = -91.67 \text{ kN.m}$  ,  $M_{BA} = -126.1 \text{ kN.m}$   
 $M_{CB} = -96.17 \text{ kN.m}$  ,  $M_{CD} = 51.44 \text{ kN.m}$   
 $M_{DC} = -2.92 \text{ kN.m}$  ,  $M_{CE} = 44.73 \text{ kN.m}$   
 $M_{EC} = -213.98 \text{ kN.m}$  ,  $M_{FE} = -218.85 \text{ kN.m}$  ,  $M_{GF} = 119.75 \text{ kN.m}$
13.  $M_{BA} = -56.26 \text{ kN.m}$   
 $M_{BE} = 2.72 \text{ kN.m}$   
 $M_{EB} = 1.36 \text{ kN.m}$   
 $M_{BC} = 54.54 \text{ kN.m}$   
 $M_{CB} = -16.36 \text{ kN.m}$  ,  $M_{DC} = 8.18 \text{ kN.m}$
14. (a)  $S_A = 0.446 EI$  ,  $C_{AB} = 0.593$   
(b)  $K_{AB} = 0.5643 EI$  ,  $C_{AB} = 0.59276$
15.  $\theta_B = -6.25 \times 10^{-4} \text{ rad}$  ,  $\theta_E = \theta_D = 3.125 \times 10^{-4} \text{ rad}$   
 $M_{AB} = -2.09 \text{ K.ft}$  ,  $M_{BA} = -7.29 \text{ K.ft}$   
 $M_{BC} = 16.66 \text{ K.ft}$  ,  $M_{CB} = -21.35 \text{ K.ft}$   
 $M_{BD} = -4.68 \text{ K.ft}$
16.  $M_{AB} = 19.09 \text{ kN.m}$  ;  $M_{BA} = 11.04 \text{ kN.m}$   
 $M_{CB} = -5.187 \text{ kN.m}$  ,  $M_{CD} = 5.187 \text{ kN.m}$
18.  $EI = 10000 \text{ K.ft}^2$   
 $\Delta_B = 0.5 \text{ inch} (\downarrow)$   
 $\theta_B = -0.00844 \text{ rad}$   
 $\theta_C = 0.022544 \text{ rad}$   
 $M_{AB} = 17 \text{ K.ft}$  ,  $M_{BA} = -43.13 \text{ K.ft}$

19.  $\theta_B = -6.365/EI$  ;  $\theta_C = 4.52/EI$  ,  $\Delta = 18.17/EI$   
 $M_{AB} = 9.316 \text{ kN.m}$  ;  $M_{HA} = -9.947 \text{ kN.m}$  ,  $M_{CB} = -11.33 \text{ kN.m}$   
 $M_{DC} = 9.07 \text{ kN.m}$
20.  $M_{AB} = 9.86 \text{ K.ft}$  ;  $M_{BA} = -46.46 \text{ K.ft}$   
 $M_{CB} = -36.71 \text{ K.ft}$
21. **Unknowns**  $\theta_B$  ,  $\theta_C$  ,  $\theta_E$  ,  $\theta_D$  ,  $\theta_G$  ,  $\Delta_G$  ,  $\Delta_E$   
**Conditions**  $M_B = M_E = M_C = M_D = M_G = 0$   
 $H_{BC} + H_{ED} + H_{HG} = 0$   
 $H_{AB} + H_{FE} + H_{HG} = 0$
22.  $\theta_C = 0$  ,  $\theta_D = 0$  ,  $\Delta = 720/EI$   
 $M_{AC} = 30$  ,  $M_{FD} = -30$  ,  $M_{CD} = 0$
23. (a)  $M_{FAB} = -23.41 \text{ K.ft}$
- (b)  $S_A = 0.447 EI$  ,  $C_{AB} = 0.592$
26.  $M_{FBA} = -18.1 \text{ kN.m}$  ,  $M_{FAB} = 18.1 \text{ kN.m}$   
 $S_A = 16.824 \text{ kN.m}$  ,  $C_{AD} = 0.6238$   
 $M_{AB} = 13.71 \text{ kN.m}$  ,  $M_{BA} = -24.97 \text{ kN.m}$
27.  $M_{AB} = -10.36 \text{ kN.m}$  ,  $M_{BA} = -65.73 \text{ kN.m}$   
 $M_{BC} = 65.73 \text{ kN.m}$
28.  $A_{BC} = -43.78 \text{ kN}$  ,  $A_{DC} = 26.21 \text{ kN}$  ,  $A_{DA} = 0$   
 $A_{AC} = -8.78 \text{ kN}$
29.  $M_{AB} = 21.48 \text{ kN.m}$  ,  $M_{BA} = 34.35 \text{ kN.m}$  ,  $M_{BC} = 15.64 \text{ kN.m}$   
 $M_{CB} = 4.91 \text{ kN.m}$

### Chapter 5

$$1. (a) \underline{D}_C = \begin{bmatrix} 0.012 \\ 0 \\ 0.00016 \end{bmatrix} , \underline{D}_B = \begin{bmatrix} 0.0026 \\ -0.00034 \\ 0.00174 \end{bmatrix}$$

$$\underline{A}_{AB}^T = [81.2 \quad -74.24 \quad 146.9] , \underline{A}_{BA}^T = [81.2 \quad 5.76 \quad 127.1]$$

$$\underline{A}_{BC}^T = [-5.73 \quad 81.2 \quad -127.25] , \underline{A}_{CB}^T = [-5.73 \quad -38.77 \quad 0]$$

$$\underline{A}_{AC}^T = 48.48 \text{ kN}$$

$$(h) \underline{A}_{AC}^T = 58.93 \text{ kN}$$

$$2. \quad D_{Ay} = -0.152 \times 10^{-3} \text{ m}, \quad D_B = 10^{-3} \begin{bmatrix} 0.252 \\ 0.237 \end{bmatrix}, \quad D_D = 10^{-3} \begin{bmatrix} 0.273 \\ 0.262 \end{bmatrix}$$

$$D_{Cx} = 10^{-3} \times 0.489 \text{ m}$$

$$A'_{AB} = 168 \text{ kN}, \quad A'_{AD} = 98.8 \text{ kN}, \quad A'_{AE} = -79 \text{ kN}, \quad A'_{BC} = 158 \text{ kN}$$

$$A'_{BD} = 12.5 \text{ kN}, \quad A'_{BE} = 15.4 \text{ kN}$$

$$4. \quad D_2 = 10^{-3} \begin{bmatrix} 3.071 \\ -8.93 \end{bmatrix}, \quad D_4 = 10^{-3} \begin{bmatrix} -1.2 \\ -16 \end{bmatrix}, \quad D_{3y} = -1.6 \times 10^{-2} \text{ m}$$

$$D_{5x} = -6 \times 10^{-4} \text{ m}, \quad A'_{12} = -585.8 \text{ kN}, \quad A'_{15} = -120 \text{ kN}, \quad A'_{52} = 214.2 \text{ kN}$$

$$A'_{54} = -120 \text{ kN}, \quad A'_{24} = 282.9 \text{ kN}, \quad A'_{23} = -614.18 \text{ kN}$$

$$6. \quad \underline{D}_2 = \frac{1}{EI} \begin{bmatrix} -68.38 \\ -48.95 \end{bmatrix}, \quad \underline{D}_3 = \frac{1}{EI} \begin{bmatrix} -115.9 \\ -10.59 \end{bmatrix}, \quad \theta_4 = 83.63/EI$$

$$M_{AB} = 164.9 \text{ kN.m}$$

$$7. \quad A'_{23} = 49.45 \text{ kN}, \quad A'_{24} = 0, \quad A'_{25} = -55.12 \text{ kN}$$

$$A'_{12} = 24.4 \text{ kN}, \quad A'_{14} = 9.56 \text{ kN}, \quad A'_{15} = 0$$

$$A'_{16} = 35.6 \text{ kN}, \quad A'_{35} = 5.52 \text{ kN}, \quad A_{34} = 7.85 \text{ kN}$$

$$A'_{36} = -9.56 \text{ kN}, \quad A'_{56} = 43.45 \text{ kN}, \quad A'_{46} = -105.6 \text{ kN}$$

$$8. \quad \underline{A}'_{12} = \begin{bmatrix} -5.8 \\ -8.45 \\ 79.04 \end{bmatrix}, \quad \underline{A}'_{21} = \begin{bmatrix} 4.18 \\ 1.54 \\ 18.71 \end{bmatrix}, \quad \underline{A}'_{23} = \begin{bmatrix} -1.54 \\ 4.18 \\ -18.7 \end{bmatrix}$$

$$\underline{A}'_{32} = \begin{bmatrix} -11.54 \\ -5.8 \\ 41.6 \end{bmatrix}, \quad \underline{D}_2 = 10^{-5} \begin{bmatrix} 63.7 \\ -81.68 \\ 3.39 \end{bmatrix}$$

$$9. \quad \underline{D}_2 = \begin{bmatrix} 2.256 \\ -1.785 \\ 3.176 \end{bmatrix}, \quad A'_{21} = 6.86 \text{ kN}, \quad A'_{23} = -3.448 \text{ kN}$$

$$A'_{24} = -15 \text{ kN}$$

$$11. \quad A'_{AB} = -19.51 \text{ kN}, \quad A'_{BC} = -1.13 \text{ kN}, \quad A'_{CD} = 12.74 \text{ kN}$$

$$A'_{DF} = -18.02 \text{ kN}, \quad A'_{FE} = -18.36 \text{ kN}, \quad A'_{EA} = -6.34 \text{ kN}$$

$$\underline{D}_C = \begin{bmatrix} -82.56 \\ -263.81 \end{bmatrix}, \quad \underline{D}_F = \begin{bmatrix} -86.7 \\ -199.3 \end{bmatrix}$$

$$12. \quad \underline{S} = \frac{EA}{L} \begin{bmatrix} 1.353 & -0.353 & -1 & 0 \\ -0.353 & 1.353 & 0 & 0 \\ -1 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

$$15. \quad \underline{D}_B = \begin{bmatrix} -0.13 \\ -0.353 \\ 0 \end{bmatrix}, \quad D_C = -0.853, \quad \underline{A}_{AB}^T = [-4.42 \quad 0.76 \quad -6.09]$$

$$16. \quad \underline{D}_B = \begin{bmatrix} 3.75 \\ -1.52 \\ 0.232 \end{bmatrix}, \quad \underline{A}_{AB} = \begin{bmatrix} -12.38 \\ 91.27 \\ 219.33 \end{bmatrix}, \quad \underline{A}_{CB} = \begin{bmatrix} 109.53 \\ -14 \\ 453.57 \end{bmatrix}$$

$$17. \quad \underline{A}_{AB} = \begin{bmatrix} -25.5 \\ 10.28 \\ -10.97 \end{bmatrix}, \quad \underline{A}_{BC} = \begin{bmatrix} -75.59 \\ -60.28 \\ 214.33 \end{bmatrix}, \quad \underline{A}_{ED} = \begin{bmatrix} -75.79 \\ -60.28 \\ 214.33 \end{bmatrix}$$

$$18. \quad \underline{A}_A = \begin{bmatrix} -25.52 \\ -22 \\ 188.14 \end{bmatrix}, \quad \underline{A}_E = \begin{bmatrix} 24.48 \\ 22 \\ 200.27 \end{bmatrix}$$

$$19. \quad \underline{A}_{AB} = \begin{bmatrix} -35.26 \\ -24.77 \\ 307.2 \end{bmatrix}, \quad \underline{A}_{ED} = \begin{bmatrix} -14.72 \\ 24.77 \\ 0 \end{bmatrix}$$

$$20. \quad \underline{D}'_A = \begin{bmatrix} -81.26 \\ 0 \\ -12.19 \end{bmatrix}, \quad \underline{D}'_B = \begin{bmatrix} 0 \\ -32.5 \\ -12.19 \end{bmatrix}, \quad \underline{D}'_C = \begin{bmatrix} -65 \\ 0 \\ 0 \end{bmatrix}$$

$$\underline{A}'_{AB} = \begin{bmatrix} -3.519 \\ 0 \\ 0 \end{bmatrix}, \quad \underline{A}'_{CB} = \begin{bmatrix} -3.519 \\ 0 \\ 1.52 \end{bmatrix}, \quad \underline{A}'_{DB} = \begin{bmatrix} 0 \\ 9.9 \\ -16.76 \end{bmatrix}$$

$$21. \quad \underline{D}'_B = \begin{bmatrix} -54.75 \\ -235.82 \\ 7.727 \end{bmatrix}, \quad \underline{A}'_{AB} = \begin{bmatrix} -3.04 \\ 13.1 \\ -15.55 \end{bmatrix}, \quad \underline{A}'_{CB} = \begin{bmatrix} 3.04 \\ 46.90 \\ -335.26 \end{bmatrix}$$

$$22. \quad \underline{D}'_{AS} = 10^{-4} \begin{bmatrix} 3.829 \\ 0 \\ -1.977 \times 10^{-3} \end{bmatrix}, \quad \underline{D}_B = 10^{-4} \begin{bmatrix} 2.08 \\ -2.4 \\ 0.1265 \end{bmatrix}, \quad \underline{D}_C = 10^{-4} \begin{bmatrix} 0 \\ 0 \\ 0.437 \end{bmatrix}$$

$$\underline{A}'_{AB} = \begin{bmatrix} -12.87 \\ -6.4 \\ 0 \end{bmatrix}, \quad \underline{A}'_{BA} = \begin{bmatrix} -12.87 \\ 1.59 \\ 12.12 \end{bmatrix}, \quad \underline{A}'_{23} = \begin{bmatrix} -11.24 \\ -6.48 \\ -12.17 \end{bmatrix}$$

$$\underline{A}'_{32} = \begin{bmatrix} -11.24 \\ 9.52 \\ 0 \end{bmatrix}$$

$$23. \quad \underline{D}_B = 10^{-3} \begin{bmatrix} 0 \\ 0 \\ -0.378 \end{bmatrix}, \quad \underline{A}'_{AB} = \begin{bmatrix} 0 \\ -18.7 \\ 24.9 \end{bmatrix}, \quad \underline{A}'_{BC} = \begin{bmatrix} 0 \\ -17.8 \\ 62.7 \end{bmatrix}$$

$$\underline{A}'_{CB} = [0 \quad 2.2 \quad 0]$$

$$24. \quad \underline{D}_A = \begin{bmatrix} 0.134 \\ -0.0293 \\ 0.0213 \end{bmatrix}, \quad \underline{D}_B = \begin{bmatrix} 0.0014 \\ -0.0295 \\ 0 \end{bmatrix}$$

$$\underline{A}'_{AB} = \begin{bmatrix} -1.05 \\ -4.875 \\ -0.75 \end{bmatrix}, \quad \underline{A}'_{BA} = \begin{bmatrix} -1.05 \\ 5.125 \\ 0 \end{bmatrix}, \quad \underline{A}'_{BC} = \begin{bmatrix} -5.25 \\ -1.056 \\ 0 \end{bmatrix}$$

$$\underline{A}'_{CB} = \begin{bmatrix} -5.25 \\ 18.94 \\ -71.48 \end{bmatrix}$$

$$25. \quad \underline{D}_B = 10^{-3} \begin{bmatrix} -6.98 \\ -0.134 \\ -96.58 \end{bmatrix}, \quad \underline{D}_E = 10^{-3} \begin{bmatrix} -6.54 \\ -0.09 \\ -926.52 \end{bmatrix}$$

$$\underline{A}'_{AB} = \begin{bmatrix} 42.65 \\ -232.5 \\ 2.68 \end{bmatrix}, \quad \underline{A}'_{CB} = \begin{bmatrix} 47.65 \\ 196.76 \\ 2.086 \end{bmatrix}$$

$$29. \quad \underline{A}'_{23} = \begin{bmatrix} 29.22 \\ 9.39 \\ -1246.9 \end{bmatrix}, \quad \underline{A}'_{43} = \begin{bmatrix} -105.4 \\ 37.18 \\ -1227.65 \end{bmatrix}, \quad \underline{A}'_{13} = 8.89 \text{ K}$$

$$\underline{D}_3 = \begin{bmatrix} 0.0389 \\ -0.0703 \\ -0.042 \end{bmatrix}, \quad \underline{D}_5 = \begin{bmatrix} 0.0389 \\ -4.95 \\ -0.125 \end{bmatrix}$$

$$31. \quad \underline{A}'_{AB} = \begin{bmatrix} -28.517 \\ -12.55 \\ 31.97 \end{bmatrix}, \quad \underline{A}'_{BA} = \begin{bmatrix} -28.517 \\ 27.44 \\ -180.919 \end{bmatrix}$$

$$\underline{A}'_{BC} = \begin{bmatrix} -51.28 \\ 20.84 \\ -319.08 \end{bmatrix}, \quad \underline{A}'_{CB} = \begin{bmatrix} -51.28 \\ 20.84 \\ -202.1 \end{bmatrix}, \quad \underline{D}_B = \begin{bmatrix} -0.019 \\ -0.0965 \\ -0.0146 \end{bmatrix}$$

$$35. \quad \underline{A}'_{AB} = \begin{bmatrix} -4.03 \\ -2.21 \\ 20.14 \end{bmatrix}, \quad \underline{A}'_{CB} = \begin{bmatrix} -4.03 \\ 2.2 \\ -20.14 \end{bmatrix}, \quad \underline{A}'_{DA} = \begin{bmatrix} -1.95 \\ 0 \\ -15.03 \end{bmatrix}$$

$$\underline{D}'_B = \begin{bmatrix} 5.1317 \\ 0.0442 \\ 0 \end{bmatrix}$$

$$36. \quad \underline{A}'_{AB} = \begin{bmatrix} 3.25 \\ -8.46 \\ 39.37 \end{bmatrix}, \quad \underline{A}'_{BD} = \begin{bmatrix} 3.25 \\ -8.46 \\ 39.37 \end{bmatrix}, \quad \underline{D}_B = \begin{bmatrix} 0.516 \\ -0.1726 \\ -0.00163 \end{bmatrix}$$

$$37. \quad \underline{A}'_{AB} = \begin{bmatrix} -9.55 \\ -1.35 \\ 10.12 \end{bmatrix}, \quad \underline{A}'_{CB} = \begin{bmatrix} -3.65 \\ 0.44 \\ -6.448 \end{bmatrix}, \quad \underline{D}_B = \begin{bmatrix} 0.0328 \\ -0.086 \\ 0.0036 \end{bmatrix}$$



## Index

- Actions 59, 60
- Answers to problems 561
- Arches 82, 485
- Assembled stiffness 346, 376
- Axial force diagram 30
  
- Balance moment 293
- Beams 17, 94, 127, 201, 221, 260, 369
- Bending moment 30
- Betti's theorem 58, 59
- Boundary conditions 13, 380
- Bracing 121
- Bridge 531, 533
  
- Cantilever 94
- Carry over factor 294
- Carry over moment 294
- Castigliano's theorems 50, 125, 320
- Centroid 165
- Column analogy 165
- Compatibility conditions 13, 256, 376
- Complementary energy 23
- Complementary work 21
- Computer applications 539-557
- Conjugate beam 65
- Connectivity matrix 323
- Consistent deformation method 88
- Continuous beams 135
- Coordinate transformation 370
  
- Dead load 531
- Deflection 102
- Deformations 59, 60
- Deformations-Actions relationship 60
- Degrees of Freedom 253
- Degrees of kinematic indeterminacy 253
- Degrees of static indeterminacy 75
- Design process 3
- Determinate 14
- Direction cosines 371
- Discrete elements 4, 514
- Displacements by supports 99, 206
- Distribution factor 258
- Distributed moment 257
- Domes 3
  
- Elastic center 149
- Elastic curve 63
- Elastic spring 98, 455
- Elastic support 455
- Elastic weight 65
- Elasticity equations 519
- End-actions 59, 60
- End-forces 59, 60
- Energy methods 50, 125
- Equation of three moments 135
- Equilibrium conditions 12
- Equilibrium matrix 220
- Equilibrium method 8, 75
- Equivalent joint loads 195, 418
- External work 21, 67
  
- Finite element method 513
- Fixed end forces 197, 198, 199
- Fixed end moments 197, 198, 199
- Fixed supports 14
- Flexibility coefficients 59, 194, 220
- Flexibility matrix 194, 220
- Flexibility method 191, 218
- Force method 191, 218
- Force-deformation relationship 60, 365
- Frame structures 4, 78, 103, 128, 208, 265
  
- Girder 534
- Grids 369, 408
  
- Hinged support 14
  
- Inclined support 453
- Inflection point 67
- Indeterminacy 75
- Indeterminate structures 75
- Influence lines 531
- Integration 24, 50
- Internal forces 14, 60
- Isoparametric element 526
- Isotropic material 520
  
- Kinematic indeterminacy 253

- Lack of fit 424
- Linearity 12
- Live load 531
  
- Material nonlinearity 11
- Matrix formulations 191, 215, 322, 346
- Matrix methods 191, 215, 322, 346, 365
- Maximum moment 34
- Maxwell's reciprocal theorem 58
- Membrane element 526
- Modulus of elasticity 12
- Moment area theorems 63
- Moment distribution method 292
- Moving loads 531
- Muller-Breslau's principle 531
  
- Nodal forces 522
- Nodes 513
- Nonlinear materials 11
- Nonlinear spring 455
  
- Orthotropic material 519
  
- Pin connected truss 14
- Pin connected member 113, 118
- Pin supports 14
- Plane strain 520
- Plane stress 520
- Plate 527
- Portal frame 21, 103, 256
- Potential energy 21
- Primary structure 75
- Principle of super position 12
- Principle of virtual work 36
  
- Reactions 14
- Rectangular element 527, 529
- Redundant 75-86
- Releases 75-86
- Roller supports 14
  
- Settlement 67, 100, 110
- Shape factor 27
- Shear deformation 492
- Shear force 26
- Shear force diagram 30
- Shells 4
- Sidesway 260, 302
- Sign conventions 30, 260, 365
- Simultaneous equations 218, 322
- Slope deflection equation 256
  
- Space frame 84, 411
- Space truss 77, 391
- Stability 75
- Static equilibrium 12
- Statically determinate 14
- Statically indeterminate 75
- Stiffness coefficients 60, 322, 346, 365
- Stiffness matrix 60, 322, 344, 365
- Strain energy 23, 24
- Strain 519
- Stress 519
- Stringer 534
- Structural analysis 3
- Structures 4
- Superposition principle 12, 201, 220, 325
- Support settlements 67
- Surface loads 521
- Sway 256, 302
- Symmetry 12
  
- Temperature effect 27, 95
- Tension members 230
- Three moment equation 135
- Torsion 24, 369, 365
- Transformation 370
- Triangular finite element 514
- Trusses 14, 75, 77, 103, 131
  
- Unit displacement method 37
- Unit load method 39
  
- Virtual displacement 37
- Virtual load 39
- Virtual work 36
  
- Work 21